





# PRODUCT GUIDE

[www.cavitysliders.com](http://www.cavitysliders.com)

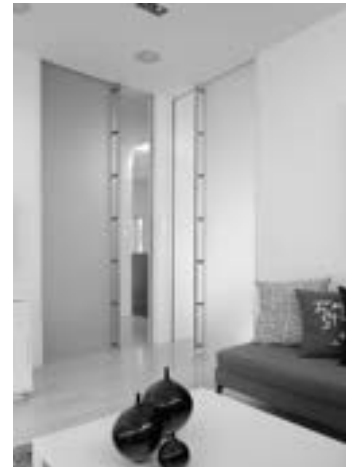

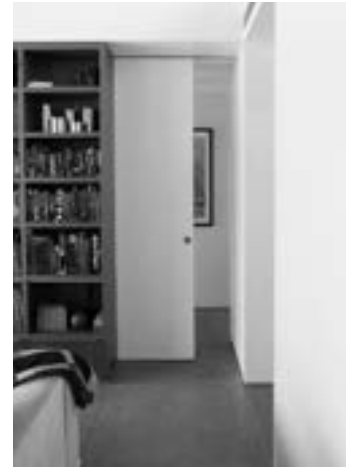



The Pocket Door Experts



Pocket frames for interior sliding doors



Click the section you would like to view

1



Barn door and top mounted track systems for sliding doors

2



Handles and locks for sliding and pocket doors. Commercial, architectural and residential

3



ADA Hardware

ADA handles and locks for sliding and pocket doors

4



Automated sliding doors

5

Displays & Jigs

6

Pricing & Order Forms

7

## Cavity Sliders USA Inc.

### Showroom

548 Finney Ct  
Gardena, CA 90248

T (888) 466 0030

F (310) 769 5824

E [info@cavitysliders.com](mailto:info@cavitysliders.com)

[www.cavitysliders.com](http://www.cavitysliders.com)

## Introduction

Cavity Sliders USA Inc is the premier manufacturer of sliding door hardware. With strict attention to detail from design through to production, Cavity Sliders offers a product line that is high quality, reliable and operates smoothly.

From humble beginnings in New Zealand as a family business, Cavity Sliders has grown to become a world leader in the supply of sliding door hardware. With branches throughout North America, Australia and New Zealand, Cavity Sliders is committed to upholding the quality level of its existing product line. Emphasis is also placed on developing new products to meet the changing trends of the modern market.



## CavitySliders™ Pocket Frame

The **CS Cavity Slider™** is a kitset pocket frame suitable for residential and commercial projects. It is constructed from aluminum extrusions, making it structurally robust. The frame can be cut down to suit your door size and it is quick and easy to assemble. Suitable for 1-3/8" or 1-3/4" doors and available with or without soft close.

Fully automated pocket systems are also available.



CS CaviTrack



CS Barn Door Track with hanger brackets and stops.

## TrackSystems

CS Track Systems is a range of high quality tracks to cater to your interior sliding applications. The integrity of our tracks is derived from their heavy duty aluminum extrusions. These systems have been engineered to offer reliable and incredibly smooth operation time after time.

CS Track Systems work perfectly with our carriages and other components, allowing you to supply and specify these products with confidence. Whether it be a barn sliding, multi-profile, bypass or pocket application, CS Track Systems have a first-class option to satisfy your requirements.

## CaviLock®

Cavity Sliders USA Inc. provides a complete range of hardware specifically designed for use on pocket doors. From high quality commercial grade ADA compliant locks for restrooms through to residential privacy locks, CaviLock has a handle that will suit your purpose.

The plant has the capacity to meet large orders as well as custom, small scale production runs.



CL400 Privacy (Snib/Emergency)  
Satin Chrome finish

# CavitySlider® Pocket Frame

The **CS Cavity Slider®** is a practical solution for those areas where there is not enough space for a swinging door. Unlike other pocket systems, the CS Cavity Slider® is structurally robust due to its construction from aluminum extrusions.

This product is supplied as a kitset and is easy to assemble and install. The pocket frame accommodates 1-3/8" and 1-3/4" doors (35mm and 44.5mm) up to 4'0" x 8'0" (1220 x 2438mm) and can be cut down to size on site.

The CS Cavity Slider® is suitable for residential and commercial projects as it meets Type 1 construction code without any combustible materials. In addition to its space saving attributes in restrooms, hallways and laundries, it can be used with confidence for architectural feature openings around your project.



CS Cavity Sliders™ with glazed aluminum doors and CL100 ADA LaviLock handles.



CS Cavity Slider® kitset box.

# CavitySlider® Features



Corner joining brackets ensure precise right angled assembly



Smooth running carriages with encased ball bearings. Up to 500lb (240kg) capacity

**SofStop®**  
Soft Close/Soft Open also available

**Watch Video**



Split Jamb and slats use hollow core technology for superior rigidity

Horizontal slats for added strength

Door Thickness  
1-3/8" or 1-3/4"  
(35 or 44.5mm)

Strong aluminum frame complies with Type 1 Construction



Extruded aluminum track incorporated into head unit



T-joining brackets for easy assembly of slats to split jamb & back stud



Trim Clips for quick & easy trim fitting

Compatible with 3-1/2" and 3-5/8" wood or steel stud

Bottom plate assembly



Adjustable T-Guide

Patent Pending



Cycle tested 1 million openings



ADA compliant



Available with SofStop®



Single or Bi-Parting units





Maximum door weight




Easy assembly

# CavitySlider® Technical Info

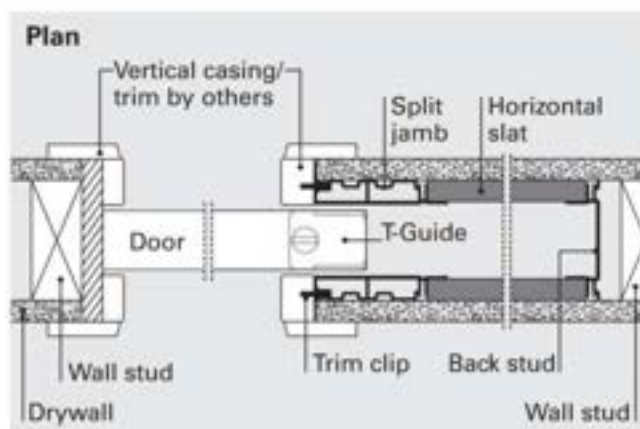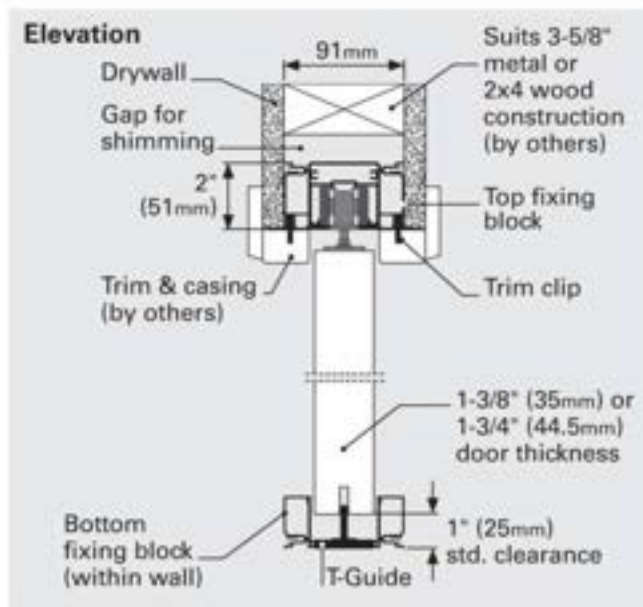

## Rough Opening



DH = Door Height  
DW = Door Width

## Standard CS Track Features

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- 1 Heavy duty **one-piece** extruded aluminum track.
- 2 Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- 3 Large diameter wheels with precision ground bearings make for smooth running.
- 4 Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- 5 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- 6 **CarriSnap™** quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.



Dimension	inches	mm
RO height	DH + 4 1/4"	DH + 108
RO width - Single	(DW x 2) + 2"	(DW x 2) + 51
RO width - Bi-Parting	(DW x 4) + 2"	(DW x 4) + 51

## How to Order

### 1. Choose Size

Frames can be cut down on site. Maximum size for each model shown below:

Model	Max Door Size (in)	Max Door Size (mm)
CSS4K3068	3'0" x 6'8"	914 x 2032mm
CSS4K3080	3'0" x 8'0"	1066 x 2438mm
CSS4K4080	4'0" x 8'0"	1219 x 2438mm

For door heights above 8', please contact us.

### 2. Choose a carriage pack (one per door)

(includes carriages, mounting plates, T-Guide, fixing screws and adjusting wrench)

Packs are available with 0, 1 or 2 track stops.

Standard	M6 (200lb/90kg) M8 (500lb/240kg)	
SofStop® Single	Minimum Door Width	
Soft Close	No stop	1 Stop
0 - 176 lb (80kg)	25" (635mm)	28" (711mm)
176 - 264 lb (120kg)	28" (711mm)	31" (787mm)
SofStop® Twin	No stop	1 Stop
0 - 176 lb (80kg)	33" (840mm)	36" (914mm)

To use the SofStop Twin for 32" door width, contact us for instructions.



# CavitySlider® Ultimate Pocket Frame

The **CS Cavity Slider® Ultimate** is the gold standard of pocket frames. It is the largest and most robust manufactured pocket frame on the market.

Unlike other pocket systems, the **CS Cavity Slider® Ultimate's** durability is due to its construction from aluminum extrusions

This product is supplied as a kitset and is easy to assemble and install. The pocket frame can accommodate 1 3/8" to 2 1/4" thick doors up to 5'0" x 10'0" (1524 x 3048mm) in size and can be cut down on site.

The **CS Cavity Slider® Ultimate** is made to suit a 5-1/2" stud size but can be furred out to suit wider wall conditions. The **Ultimate** is suitable for residential and commercial projects as it meets Type 1 construction code without any combustible materials. In addition to its space saving attributes in restrooms, hallways and laundries, it can be used with confidence for architectural feature openings around your project.



**AVAILABLE WITH:**  
 **SofStop®** Soft Close / Soft Open

CS Ultimate Cavity Sliders™ with wooden doors.




CS Cavity Sliders™ with glazed aluminum doors and CL100 ADA LaviLock handles.




CS Cavity Slider® Ultimate kitset box.

# CavitySlider® Technical Info


## Elevation

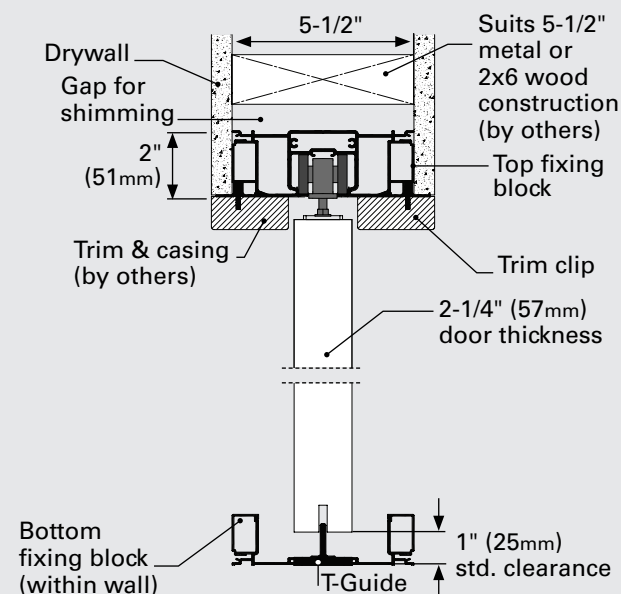

## Plan

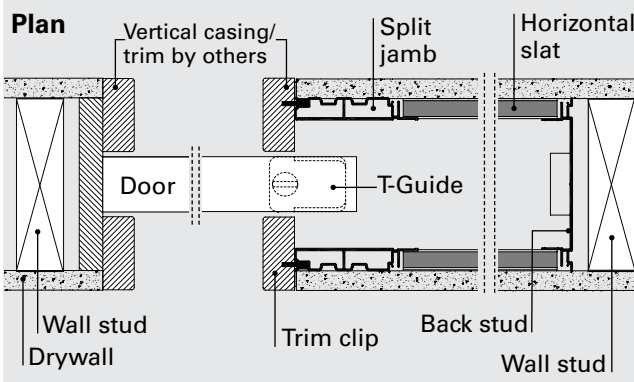

## Rough Opening



DH = Door Height  
DW = Door Width

## Standard CSTrack Features

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- 1 Heavy duty one-piece extruded aluminum track.
- 2 Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- 3 Large diameter wheels with precision ground bearings make for smooth running.
- 4 Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- 5 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- 6 CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.



Dimension	inches	mm
RO height	DH + 4 1/4"	DH + 108
RO width - Single	(DW x 2) + 2"	(DW x 2) + 51
RO width - Bi-Parting	(DW x 4) + 2"	(DW x 4) + 51

## How to Order

### 1. Choose Size

Frames can be cut down on site. Maximum size for each model shown below:

Model	Max Door Size (in)	Max Door Size (mm)
CSU6K2680	2'6" x 8'0"	762 x 2438mm
CSU6K3080	3'0" x 8'0"	914 x 2438mm
CSU6K4080	4'0" x 8'0"	1219 x 2438mm
CSU6K3090	3'0" x 9'0"	914 x 2743mm
CSU6K4090	4'0" x 9'0"	1219 x 2743mm
CSU6K30100	3'0" x 10'0"	914 x 3048mm
CSU6K40100	4'0" x 10'0"	1219 x 3048mm
CSU6K50100	5'0" x 10'0"	1524 x 3048mm

### 2. Choose a carriage pack (one per door)

(includes carriages, mounting plates, T-Guide, fixing screws and adjusting wrench)  
Packs are available with 0, 1 or 2 track stops.

Standard	M6 (200lb/90kg)	
	M8 (500lb/240kg)	
SofStop® Single Soft Close	Minimum Door Width	
	No stop	1 Stop
0 - 176 lb (80kg)	25" (635mm)	28" (711mm)
176 - 264 lb (120kg)	28" (711mm)	31" (787mm)
SofStop® Twin	Minimum Door Width	
	No stop	1 Stop
0 - 176 lb (80kg)	33" (840mm)	36" (914mm)

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248

Another quality product from:

**CavitySliders™**  
The Pocket Door Experts

# CavitySlider® Features



Corner joining brackets ensure precise right angled assembly



Smooth running carriages with encased ball bearings. Up to 500lb (240kg) capacity

**SofStop®**  
Soft Close/Soft Open also available

**Watch Video**



Extruded aluminum track incorporated into head unit



T-joining brackets for easy assembly of slats to split jambs & back stud

Horizontal slats for added strength

Split Jambs and slats use hollow core technology for superior rigidity

Door Thickness up to 3-1/2" (89mm) doors

Strong aluminum frame complies with Type 1 Construction



Trim Clips for quick & easy trim fitting

Compatible with 5-1/2" wood or steel stud

Bottom plate assembly



Adjustable T-Guide

Patent Pending



Cycle tested 1 million openings



ADA compliant



Available with SofStop®



Single or Bi-Parting units




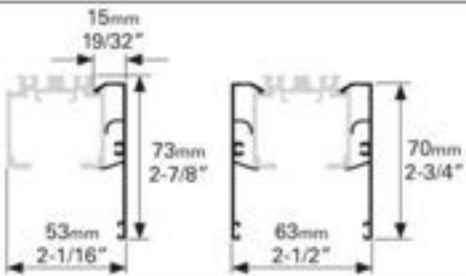

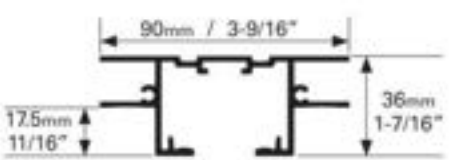










Maximum door weight








Easy assembly










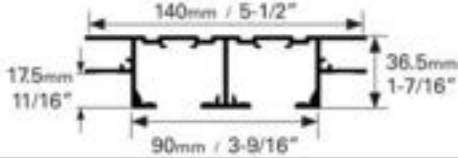

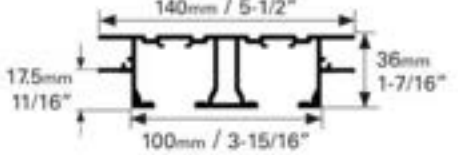

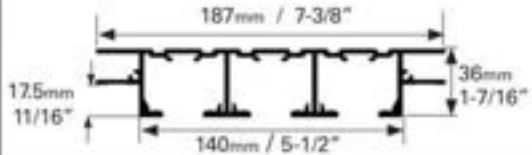

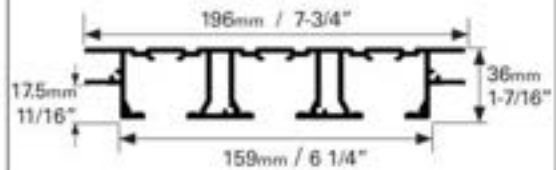




## CS Track Systems - Quick Reference

Description	Image	Dimensions
<b>CS CaviTrack</b> (Available in custom lengths up to 24ft) <b>SofStop COMPATIBLE</b>		 44mm / 1-3/4" 42mm / 1-11/16"
<b>Clip on fascia for CS CaviTrack</b> Clear or Bronze Anodized (Available in custom lengths up to 24ft)		 15mm / 19/32" 73mm / 2-7/8" 53mm / 2-1/16" 63mm / 2-1/2" 70mm / 2-3/4"
<b>CS FH-Ceiling Mount Track - Single</b> (Available in custom lengths up to 24ft) <b>SofStop COMPATIBLE</b>		 90mm / 3-9/16" 17.5mm / 11/16" 36mm / 1-7/16"
<b>CS WallMount Track</b> 1-3/8" & 1-3/4" door thickness For thicker doors, please inquire (Available in custom lengths up to 24ft) <b>SofStop COMPATIBLE</b>		 59mm / 2-5/16" 63mm / 2-1/2"
<b>Clip on fascia for CS WallMount Track</b> Clear or Bronze Anodized (Available in custom lengths up to 24ft)		 63mm / 2-1/2" 100mm / 3-15/16"
<b>CS CaviTrack Side Mount</b> 1-3/8" & 1-3/4" door thickness For thicker doors, please inquire (Available in custom lengths up to 24ft) <b>SofStop COMPATIBLE</b>		 53mm / 2-1/16" 48.5mm / 1-15/16"
<b>Clip on fascia for CS CaviTrack Side Mount</b> Clear or Bronze Anodized (Available in custom lengths up to 24ft)		 61mm / 2-3/8" 70mm / 2-3/4" 73mm / 2-7/8"
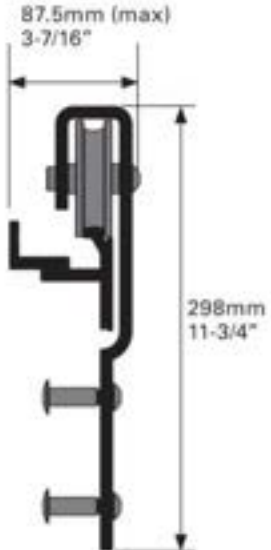
## CS Track Systems - Quick Reference

Description	Image	Dimensions
CS Barn Door Track  (Available in set lengths up to 19ft)   SofStop COMPATIBLE		
CS Barn Door Hangers & Stops Pack		
SofStop 264 lb Single Pack for CS Barn Door Track Two (2) required for soft open and soft close.		

# CS Track Systems - Quick Reference

Description	Image	Dimensions
CS Top Mount Track - Double 1-3/8" door thickness (Available in custom lengths up to 24ft)		
CS Top Mount Track - Double 1-3/4" door thickness (Available in custom lengths up to 24ft)		
CS Top Mount Track - Triple 1-3/8" door thickness (Available in custom lengths up to 24ft)		
CS Top Mount Track - Triple 1-3/4" door thickness (Available in custom lengths up to 24ft)		
CS FH-Ceiling Mount Track - Double 1-3/8" door thickness (Available in custom lengths up to 24ft)		
CS FH-Ceiling Mount Track - Double 1-3/4" door thickness (Available in custom lengths up to 24ft)		
CS FH-Ceiling Mount Track - Triple 1-3/8" door thickness (Available in custom lengths up to 24ft)		
CS FH-Ceiling Mount Track - Triple 1-3/4" door thickness (Available in custom lengths up to 24ft)		
CS Heavy Duty Track (Available in custom lengths up to 28ft)		
CS Frameless Glass Clamp 3/8" glass thickness		
CS Frameless Glass Clamp 1/2" glass thickness		

## Standard Components

**M6 Carriage**  
(up to 200lb per pair)



**M8 Carriage**  
(up to 500lb per pair)



**M10 Carriage**  
(up to 1100lb per pair)



### Carriages

- Large diameter wheels with precision ground bearings ensure smooth running and longevity.
- Self centering hanger bolt ensures the door hangs plumb.
- High performance nylon tires.
- Both M6 and M8 carriages are made to fit any of our standard track profiles.
- Hanger bolts allow for 5/16" vertical height adjustment using the wrench provided

### Mounting Plates

- CarriSnap™** quick release system allows the door to be installed or removed easily from the carriage without altering door height adjustment.
- Plastic stop on the mounting plate hits on the track stop in the track (not the carriage body like other products on the market).

### Components

**M6/M8 Mounting Plate**



**M6/M8 Mounting Plate with Stop**



**Track Stop**






**Adjusting Wrench**



**Black Plastic T Guide**  
23mm (7/8")



### Carriage Adjustment

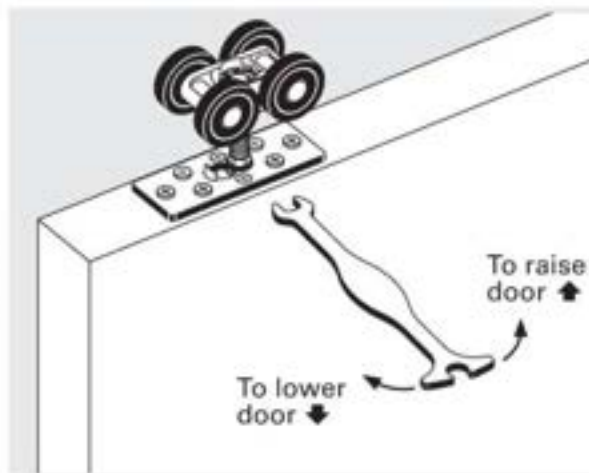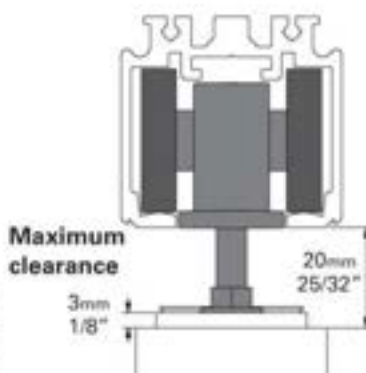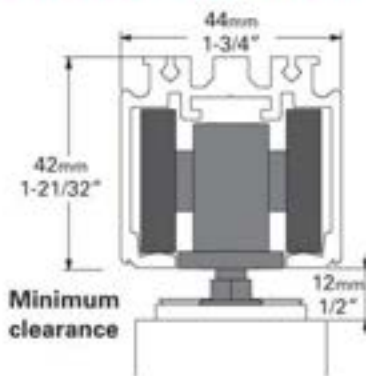

Use adjusting wrench supplied to adjust door clearance

# CaviTrack™

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.


**CS CaviTrack** is a smooth running low profile track system. Its versatility makes it popular for a range of opening types including pocket, barn, partition and multi-sliding applications. The clip on fascia is suitable for use in barn door and partition applications.

CS Cavitrack is ideal where longevity of use and smooth operation are required.

The CaviTrack can be upgraded to SofStop® soft close. This is suitable for areas where quiet is required, such as bedrooms, offices and patient rooms.



CS CaviTrack

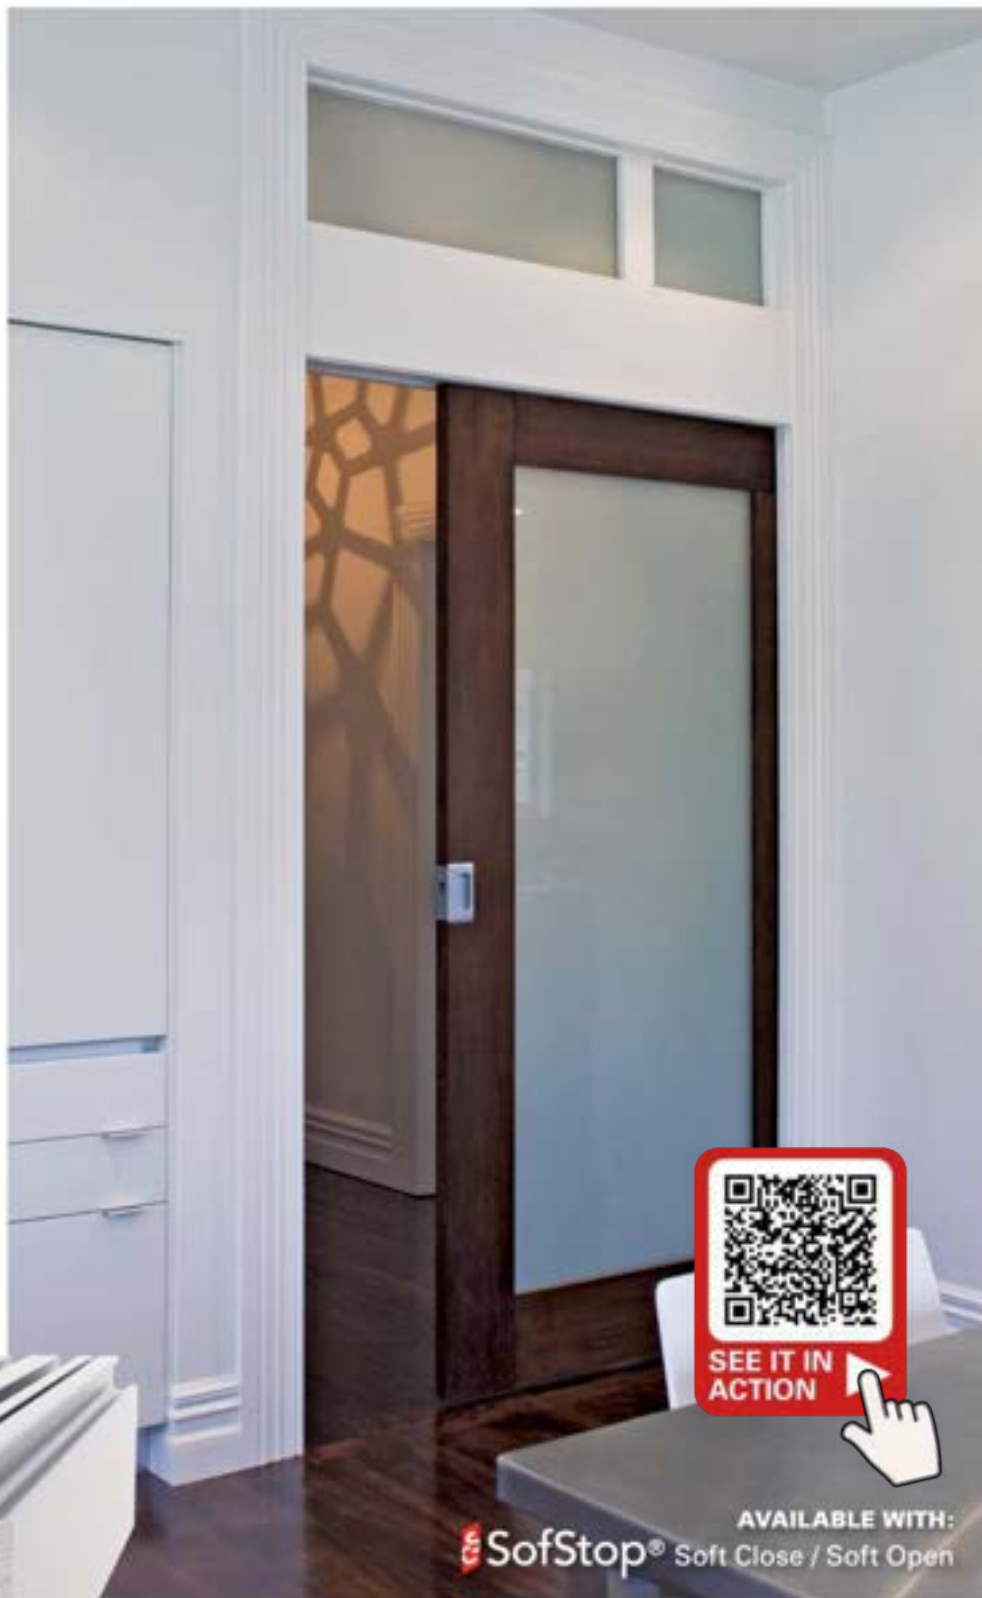


AVAILABLE WITH:  
 **SofStop®** Soft Close / Soft Open

*CS CaviTrack in a heavy duty pocket frame.*

 **TrackSystems**

## Technical Information

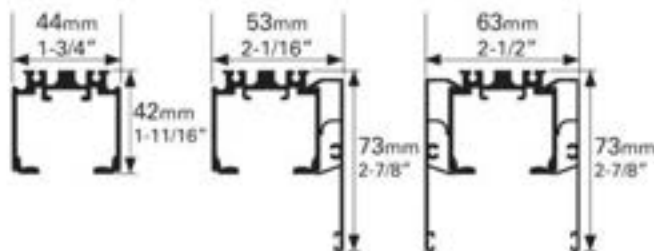

## Standard Features & Options

- Suitable for incorporating into pocket frame assemblies for a smooth running high end system.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting or CornerMeeting set-ups.
- Clip-on fascia available. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

Our products come with a number of unique features:

- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.




CaviTrack with M6 carriage



M8 carriage & mounting plate with stop

- Track Finish:** Clear anodized
- Fascia Finish:** Clear or bronze anodized
- Door Thickness:** No fascia: No limit  
With fascia: 35-45mm (1-3/8" - 1-3/4")
- Max Door Weight:** Standard: 240kg (500lb)  
SofStop: 120kg (264lb)
- Carriage Pack:** M6/M8/SofStop

## Suggested Assembly Detail

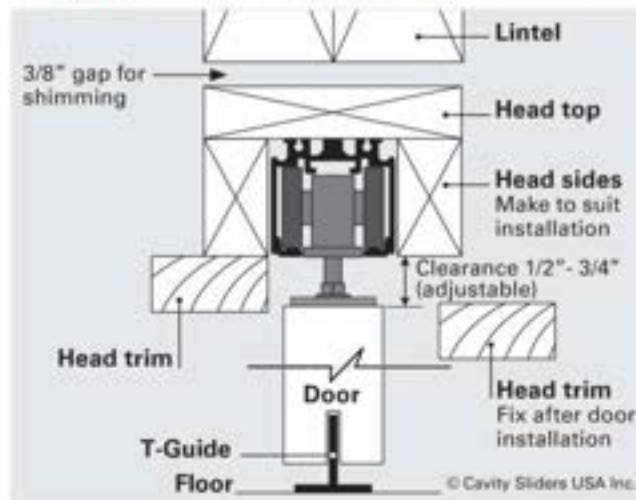

## SofStop® Features & Options

- High quality mechanism independently tested to 100,000 cycles.
- Soft close mechanism is hidden from sight, yet remains fully serviceable.

SofStop® Single Soft Close	Minimum Door Width	
	No stop	1 Stop
0- 176 lb (80kg)	25" (635mm)	28" (711mm)
176- 264 lb (120kg)	28" (711mm)	31" (787mm)
SofStop® Twin	Minimum Door Width	
	No stop	1 Stop
0- 176 lb (80kg)	33" (840mm)	36" (914mm)

## How to Order

Refer to Carriage Packs page for more information

- Specify track length**  
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
- Specify door weight & width** (see options)
- Choose a carriage pack** (one per door) - refer to Carriage Packs page  
M6 (200lb), M8 (500lb) or SofStop
- Fascia & End Caps** (optional) - Specify finish.




# FH-CeilingMountTrack - Single

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS FH-CeilingMount Track** is supplied with full-length fins that enable the ceiling lining to be fixed flush with the underside of the track. This ensures the continuation of the ceiling-line through where the door slides. The track can also be painted on site to match the ceiling color.

FH-CeilingMountTrack can be upgraded to SofStop® soft close. This is suitable for areas where quiet is required, such as bedrooms, offices and patient rooms.



 **SofStop®** AVAILABLE WITH:  
Soft Close / Soft Open

*Single FH-CeilingMountTrack in a corner meeting pocket door setup.*



60976/13

Single FH-CeilingMountTrack

 **TrackSystems**


# FH-CeilingMountTrack - Single

## Standard Features & Options

- Suitable for large room dividers or surface sliding applications.\*
- Track can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- 304 stainless steel components available for corrosive environments.
- Track may be painted on site to match ceiling color. (See data sheet on our website).

\*Not suitable for use in a pre-fabricated pocket frame. You will need to build a wall either side of the track when using in a pocket application.

## Technical Information



**Finish:** Clear anodized  
**Door Thickness:** No limit  
**Max Door Weight:** Std: 240kg (500lb)  
 SofStop: 120kg (264lb)  
**Carriage Pack:** M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- CarriSnap™** quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.




FH-Ceiling Mount Track with M6 carriage



M8 carriage & mounting plate with stop

## Fixing Detail

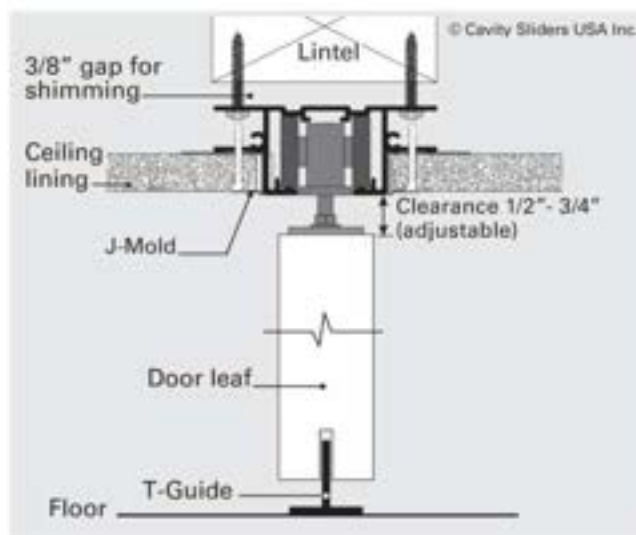

## SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.
- High quality soft close mechanism has been independently tested to 100,000 cycles.

SofStop® Single		Minimum Door Width	
Soft Close		No stop	1 Stop
	0 - 176 lb 80kg	25" (635mm)	28" (711mm)
	176 - 264 lb 120kg	28" (711mm)	31" (787mm)
SofStop® Twin		No stop	1 Stop
	0 - 176 lb 80kg	33" (840mm)	36" (914mm)

## How to Order

Refer to Carriage Packs page for more information

- Specify track length**  
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
- Specify door weight & width** (see options)
- Choose a carriage pack** (one per door)  
- refer to Carriage Packs page  
M6 (200lb), M8 (500lb) or SofStop



# WallMountTrack

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS WallMountTrack** is suitable for surface sliding applications where there is enough strength in the wall to side mount a track system above an opening.

Installation is quick and easy as the track is supplied with pre-machined fixing slots. The track also comes with a pre-finished, removable aluminum fascia and end caps that neatly conceal the top of the door, track and carriage system.

The WallMountTrack can be upgraded to SofStop® soft close. This is suitable for areas where quiet is required, such as bedrooms, offices and patient rooms.




**AVAILABLE WITH:**  
 **SofStop®** Soft Close / Soft Open

*CS WallMountTrack with clear anodized finish.*

## Standard Features & Options

- Available as a single track set-up only, i.e. no double or triple track versions are available.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

## Technical Information



**Fascia Finish:** See Options

**Door Thickness:** 35-45mm (1-3/8" to 1-3/4")

**Max Door Weight:** Std: 240kg (500lb)  
SofStop: 120kg (264lb)

**Carriage Pack:** M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.
- Fascia is removable for future servicing requirements.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.




WallMountTrack with M6 carriage



M8 carriage & mounting plate with stop

## Fixing Detail

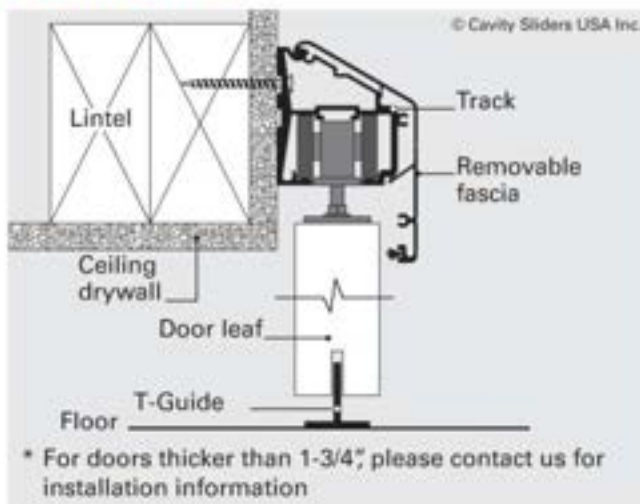

## SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.
- High quality soft close mechanism has been independently tested to 100,000 cycles.

SofStop® Single		Minimum Door Width		
Soft Close		No stop	1 Stop	2 Stops
	0- 176 lb 80kg	25" (635mm)	28" (711mm)	30" (762mm)
	176- 264 lb 120kg	28" (711mm)	31" (787mm)	33" (838mm)
SofStop® Twin		No stop	1 Stop	2 Stops
	0- 176 lb 80kg	33" (840mm)	36" (914mm)	39" (990mm)

## How to Order

Refer to Carriage Packs page for more information

- Specify track length**  
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
- Specify door weight & width** (see options)
- Specify finish**  
(fascia and end caps)
- Choose a carriage pack** (one per door)  
- refer to Carriage Packs page  
M6 (200lb), M8 (500lb) or SofStop



# CaviTrack™ - Side Mount


**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS CaviTrack Side Mount** is an ideal surface sliding solution where vertical fixing space is limited. This system is side fixed through the track profile. It is popular when the top of the door opening is close to the ceiling and there isn't structural support for fixture above the track.

Installation is quick and easy as the track is supplied with pre-machined fixing holes. The track also comes with a pre-finished, removable aluminum fascia and end caps that neatly conceal the top of the door, track and carriage system. The square profile of the track allows for it to be fixed to the wall with very little clearance between the ceiling drywall and the top of the track.

CaviTrack Side Mount can be upgraded to SofStop® soft close.



**AVAILABLE WITH:**  
 **SofStop®** Soft Close / Soft Open

*CS CaviTrack Side Mount with fascia*



60976/17


*CS CaviTrack Side Mount  
with fascia*

 **TrackSystems**

## Standard Features & Options

- Available as a single track set-up only, i.e. no double or triple track versions are available.
- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

## Technical Information




**Fascia:** See Options  
**Door Thickness:** 35-45mm (1-3/8" to 1-3/4")  
**Max Door Std:** 240kg (500lb)  
**Weight:** SofStop: 120kg (264lb)  
**Carriage Pack:** M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.
- Fascia is removable for future servicing requirements.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.



## Fixing Detail

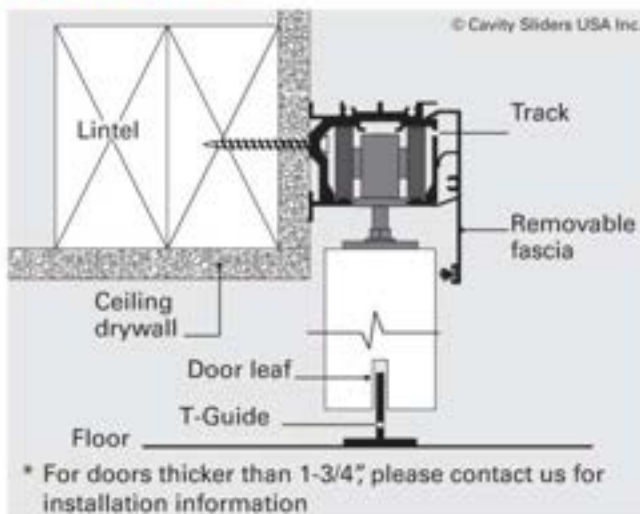

## SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.
- High quality soft close mechanism has been independently tested to 100,000 cycles.

SofStop® Single		Minimum Door Width		
Soft Close		No stop	1 Stop	2 Stops
	0 - 176 lb 80kg	25" (635mm)	28" (711mm)	30" (762mm)
	176 - 264 lb 120kg	28" (711mm)	31" (787mm)	33" (838mm)
SofStop® Twin		No stop	1 Stop	2 Stops
	0 - 176 lb 80kg	33" (840mm)	36" (914mm)	39" (990mm)

## How to Order

Refer to Carriage Packs page for more information

- Specify track length**  
Available in 6', 8', 12 and 24' pre-cut lengths or can be cut down to specified length on request.
- Specify door weight & width** (see options)
- Specify finish**  
(fascia and end caps)
- Choose a carriage pack** (one per door)  
- refer to Carriage Packs page  
M6 (200lb), M8 (500lb) or SofStop

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
 F (310) 769 5824  
 E [info@cavitysliders.com](mailto:info@cavitysliders.com)

CavitySliders USA Inc.

548 Finney Ct  
 Gardena  
 CA 90248



Another quality product from:

**CavitySliders™**  
 The Pocket Door Experts

# BarnDoorTrack

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS BarnDoorTrack** is suitable for surface sliding applications where there is enough strength in the wall to side mount a track above an opening. It is designed to offer adjustability of the door out from the wall. This allows for clearance with baseboards and casings without an unsightly head spacer.

Installation is quick and easy as the track bracket is supplied with pre-machined fixing slots. The track is pre-finished black anodized and supplied with fixing bracket, stops, door hangers and T-Guide.




60976/19

CS BarnDoorTrack and door hangers




SEE IT IN ACTION



AVAILABLE WITH:  
 **SofStop®** Soft Close / Soft Open

CS BarnDoorTrack with black anodized finish.

 **TrackSystems**

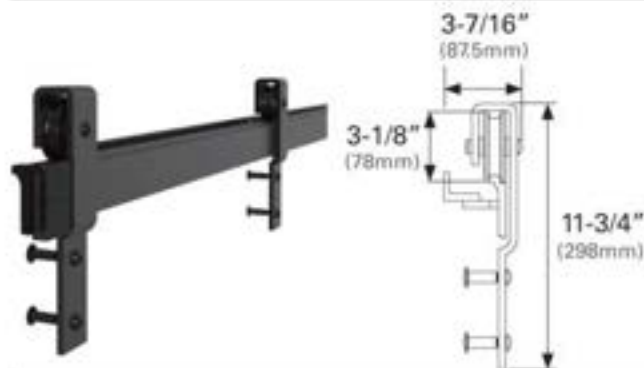

## Technical Information

<b>Track Finish:</b>	Black anodized
<b>Maximum Weight (per track):</b>	650 lb (300kg)
<b>Maximum Weight (per door):</b>	400 lb* (180kg)
<b>Maximum Door Weight (SofStop):</b>	264 lb (120kg)
<b>Minimum Door Thickness:</b>	1-1/4" (32mm)

\*Doors over 400 lb require extra hangers or a customised solution

## Design Features & Options

- Track is high-quality, heavy duty extruded aluminum.
- Black anodized finish.
- Track can be easily adjusted to allow for different wall clearances with baseboard & moulding.
- No exposed fasteners gives a clean look.
- Ultra smooth running acetal wheels.
- Pre-machined mounting holes. Additional holes can be drilled on site to match studs.
- Anti-jump system ensures wheels cannot jump off the track.
- Maximum weight per track: 650lb (see installation notes).
- SofStop® 264 lb soft close / soft open kit available (suitable for retrofit).



## Installation Notes

The stud wall must be level and solid enough to support the door weight. This track is supplied with coach screws suitable for use with timber framing. For fixing to concrete walls, masonry anchors must be used.


### Determine overall thickness

This track system is supplied with either a Narrow or Wide track bracket which must be specified at time of order. The bracket can be adjusted to suit an overall thickness of door + gap + moulding of:

1-5/8" to 2-3/8" (40 - 61mm) (Narrow option) or  
 2-3/8" to 3-1/8" (62 - 80mm) (Wide option).



## Fixing Detail

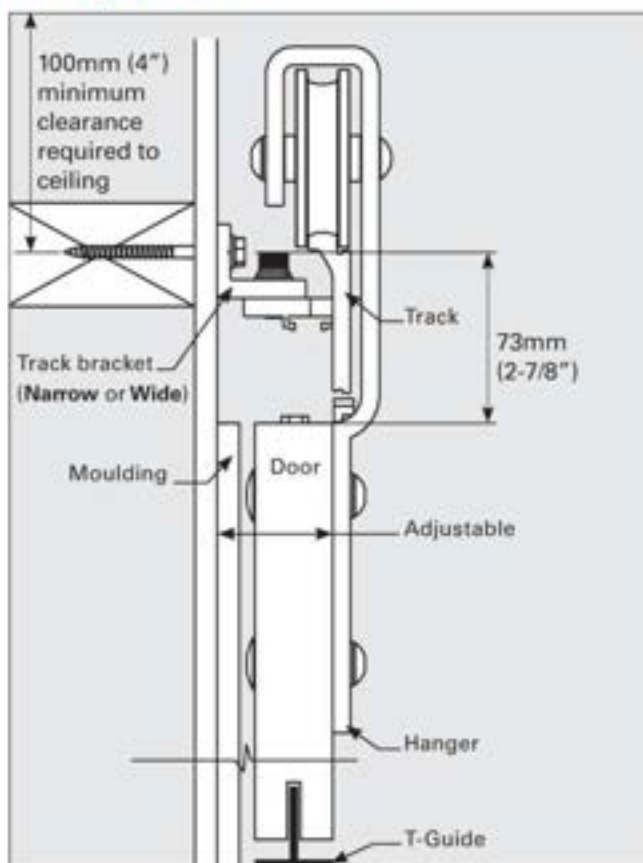

## How to Order

- Specify track length**  
 (available in 5, 6, 7, 8, 9, 10, 12, 13, 14, 15, 16, 17, 18 and 19' pre-cut lengths)
- Choose Narrow or Wide bracket**
- Select hanger packs** (one pack per door)
- Select SofStop packs**  
 (2 packs required for soft open & close.  
 Max. door weight 264 lb)



# TopMountTrack - Double/Triple

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS TopMount Track** is a smooth running low profile track system suitable for incorporating into pocket door frame and bypass wardrobe assemblies.

The addition of the TopMount Track and CS carriage system allows you to transform a standard pocket into a luxury item. This system is ideal for use in applications where longevity of use and smooth operation are required.

TopMount Track is available as standard in a double or triple track configuration.



*Double TopMount Track wardrobe door system.*



*Double TopMount Track (1-3/8" door option)*



*Triple TopMount Track (1-3/8" door option)*


60976/21

 TrackSystems


# TopMountTrack - Double/Triple Track

## Technical Information


### Double Track - 1-3/8" doors




### 1-3/4" doors



### Triple Track - 1-3/8" doors




### 1-3/4" doors



Track	Double	Triple
Finish:	Mill-finish	Mill-finish
Recommended Door Thickness:	35 or 45mm (1-3/8" or 1-3/4")	35 or 45mm (1-3/8" or 1-3/4")*
Max Weight/door:	240kg (500lb)	240kg (500lb)
Carriage Pack:	M6 or M8	M6 or M8

\*For thicker doors, please contact us for suitable options

## Suggested Fixing Detail

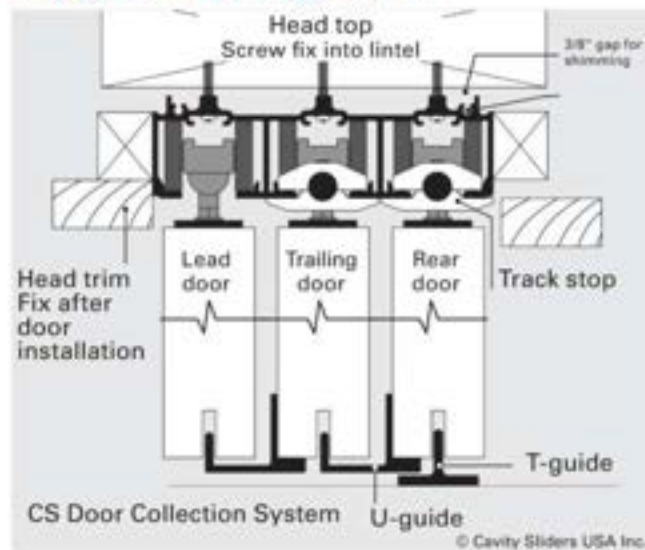

## Door Collection System

Where multiple doors are required to slide in conjunction with one another, the **CS Door Collection System** ensures a smooth running telescopic system (*see separate brochure*). The doors are connected so that there is no need for floor tracks or guides through the opening.

## How to Order

1. Choose track configuration(double or triple)
2. Specify door thickness
3. Specify track length  
(available in 6, 8, 12 and 24' pre-cut lengths)
4. Choose a carriage pack (one per door)  
- *refer to Carriage Packs page*
  - a) M6 (200lb)
  - b) M8 (500lb)  
(includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)
  - c) **CS Door Collection System**  
(includes M6 or M8 carriage pack plus door collection system for 2 door or 3 door setup)

## Design Features & Options

- Tracks can be used for bypass and collection systems.
- Tracks can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- Available in 6', 8', 12' and 24' pre-cut lengths. Custom lengths can be cut to order.
- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.



**CarriSnap™** quick release system allows the door to be removed easily from track; no need to unscrew anything and lose door height adjustment.

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248








**CavitySliders**  
The Pocket Door Experts

# Door Collection System

The **CS Door Collection System** is used in conjunction with our **FullHeight** or **TopMount** double or triple track to create an easy to operate telescopic door collection system.

The doors are connected so that there is no need for floor tracks or guides through the opening.

## Design Features & Options

-  Pack includes: pick-up extrusion, guides and fixing screws to allow one door to pick up the next.
-  Available for double or triple door set-ups - simply choose your number of doors and carriage type (**M6** or **M8**).
-  Pickup extrusion comes standard as 114" length. Can be cut to required door height.
-  You will also need to choose double or triple FH-CeilingMountTrack or CS TopMountTrack of the required length.
-  Suitable for 1-3/8" to 1-3/4" thick doors. **For thicker doors, please inquire about suitable options.**


## Pack Components

Kit includes carriages, mounting plates, adjusting wrench, extrusions, guides and fixing screws to allow one door to pick up the next.


### 2 Door M6 (200lb) Pickup Pack




### 2 Door M8 (500lb) Pickup Pack



### 3 Door M6 (200lb) Pickup Pack





### 3 Door M8 (500lb) Pickup Pack



Collection system fixed to doors (not visible when installation is complete).

## Technical Information

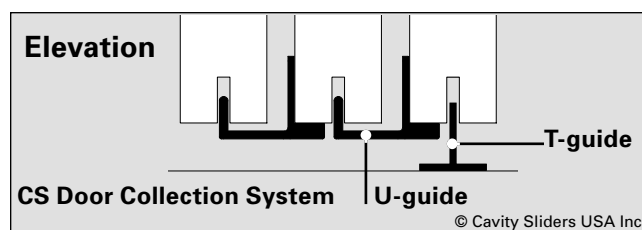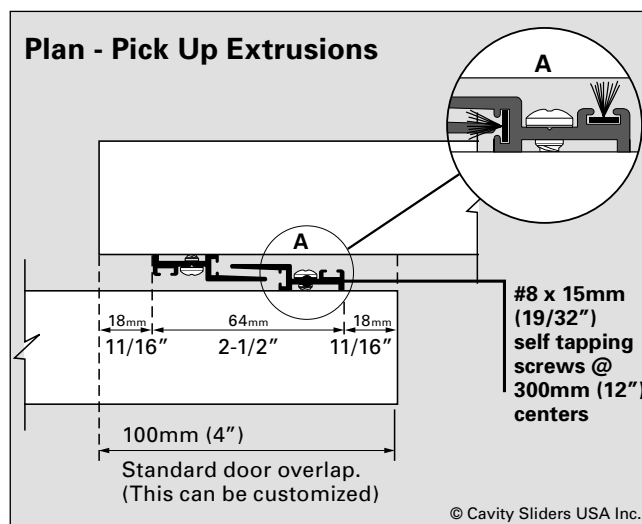

## How to Order

1. Choose number of doors  
(double door or triple door kit)

2. Choose a carriage type:  
**M6** (200lb) or **M8** (500lb)

**You will also require:**

- ☐ **CS FH-CeilingMountTrack** (double or triple) or
- ☐ **CS TopMountTrack** (double or triple)

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**


548 Finney Ct  
Gardena  
CA 90248




 **CavitySliders**  
The Pocket Door Experts

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. CS DOOR COLLECTION SYSTEM (O.D. 1986). Patent pending. 69995 - 07 2019

# Floor Channel & Bearing Guide System



Floor channel, aluminum bronze anodized with pvc insert.

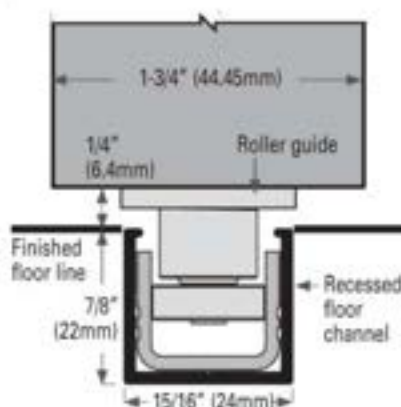


Bottom guide, ball bearing roller (stainless steel) for recessed floor channel



Ball bearing single roller, stainless steel



Ball bearing double roller, stainless steel

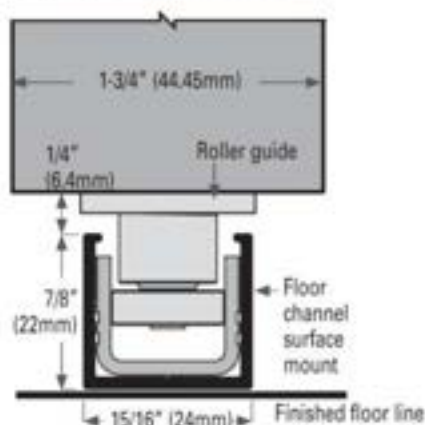


Bottom guide, ball bearing roller (stainless steel) for surface mount floor channel



Ball bearing, double roller, stainless steel



Ball bearing, single roller, stainless steel

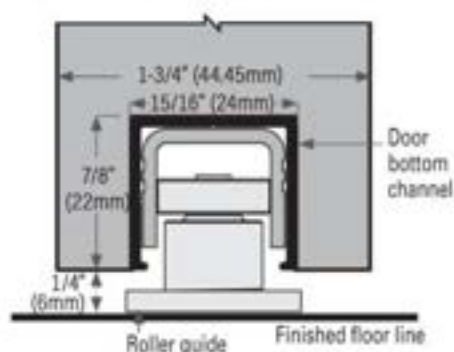

Bottom guide, ball bearing roller (stainless steel) for door bottom channel

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

CavitySliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



 **CavitySliders**  
The Pocket Door Experts

# FH-CeilingMountTrack - Double/Triple


**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS FH-CeilingMount Track** is designed to enable ceiling linings to be fixed flush with the underside of the track. This ensures the continuation of the ceiling-line through where the door slides. The track can also be painted on site to match the ceiling color.

FH-CeilingMountTrack is available as standard in a single, double and triple track configuration.



*Triple FH-CeilingMountTrack pocket door system.*

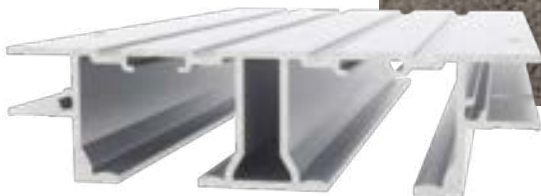

*Double FH-CeilingMountTrack  
(1-3/4" door option)*




*Triple FH-CeilingMountTrack (1-3/8" door option)*



# FH-CeilingMountTrack - Double/Triple

## Technical Information


### Double Track - 1-3/8" doors




### 1-3/4" doors



### Triple Track - 1-3/8" doors




### 1-3/4" doors

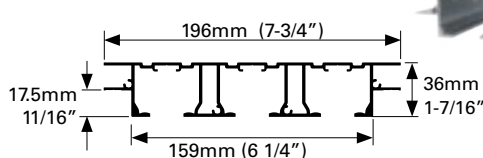

## Design Features & Options

- Tracks can be used for bypass and collection systems.\*
- Tracks can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- Available in 6', 8', 12' and 24' pre-cut lengths. Custom lengths can be cut to order.
- Track may be painted on site to match ceiling color. (See data sheet available for download from our website).
- Ceiling linings may be fixed flush with the underside of the track.

**M8 carriage & mounting plate with stop**




- Heavy duty one-piece extruded aluminum track.
- Pre-machined mounting holes.
- CarriSnap™ quick release system allows the door to be removed easily from track; no need to unscrew anything and lose door height adjustment.

\*Not suitable for use in a pre-fabricated pocket frame. You will need to build a wall either side of the track when using in a pocket application.

Track	Double	Triple
<b>Finish:</b>	Mill-finish	Mill-finish
<b>Recommended Door Thickness:</b>	35 or 45mm (1-3/8" or 1-3/4")	35 or 45mm (1-3/8" or 1-3/4")*
<b>Max Weight/door:</b>	240kg (500lb)	240kg (500lb)
<b>Carriage Pack:</b>	M6 or M8	M6 or M8

\*For thicker doors, please contact us for suitable options

## Suggested Fixing Detail

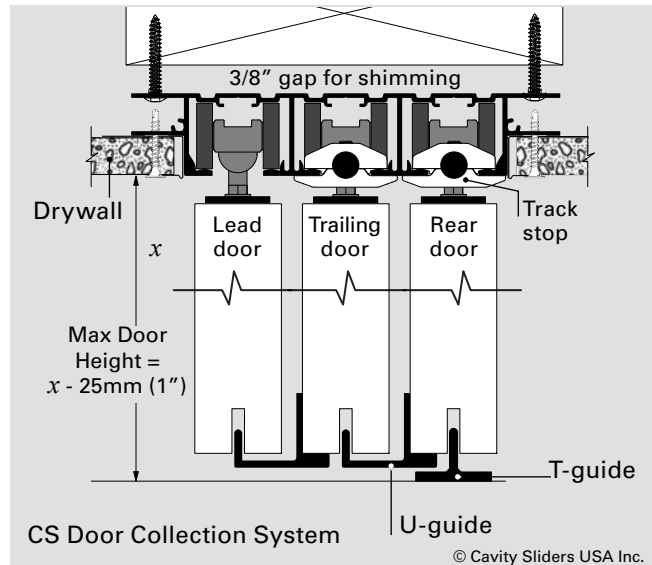

## Door Collection System

Where multiple doors are required to slide in conjunction with one another, the **CS Door Collection System** ensures a smooth running telescopic system (*see separate brochure*). The doors are connected so that there is no need for floor tracks or guides through the opening.

## How to Order

1. Choose track configuration (double or triple)
2. Specify door thickness
3. Specify track length (available in 6, 8, 12 and 24' pre-cut lengths)
4. Choose a carriage pack (one per door) - *refer to Carriage Packs page*
  - a) **M6** (200lb)
  - b) **M8** (500lb) (includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)
  - c) **CS Door Collection System** (for telescopic doors) (includes **M6** or **M8** carriage pack plus door collection system for **2 door** or **3 door** setup)

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders**  
The Pocket Door Experts


# HeavyDutyTrack

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS HeavyDutyTrack** is an ultra heavy duty extruded track system designed to take oversized or heavy doors up to a maximum of 500kg (1100lb).

This track is suitable for a wide range of commercial, industrial and residential applications such as large feature doors (as pictured) or large factory doors.

The track is supplied in a clear (natural) anodized finish, making it suitable for interior or exterior use.

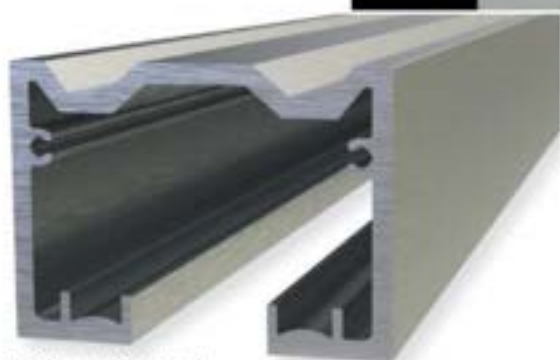


CS HeavyDuty Track

Large feature door hung on CS HeavyDutyTrack.

 TrackSystems

## Technical Information

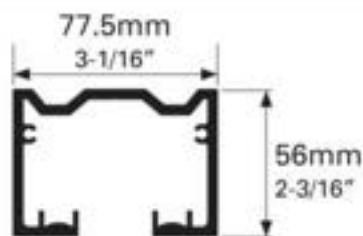

<b>Finish:</b>	Clear anodized	
<b>Max. Door Weight:</b>	500kg	1100lb
<b>Min. Door Thickness:</b>	40mm	1-9/16"
<b>Carriage Pack:</b>	M10 only	

## Track & Carriage Features

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:




- 1 High quality, ultra heavy-duty aluminum.
- 2 Pre-machined mounting holes.
- 3 Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- 4 M10 body made from cast stainless steel for strength and reliability.
- 5 Large diameter wheels with precision ground bearings make for smooth running.
- 6 CarriSnap™ quick release system allows the door to be removed easily from the track.



M10 carriage & mounting plate

## Suggested Assembly Detail

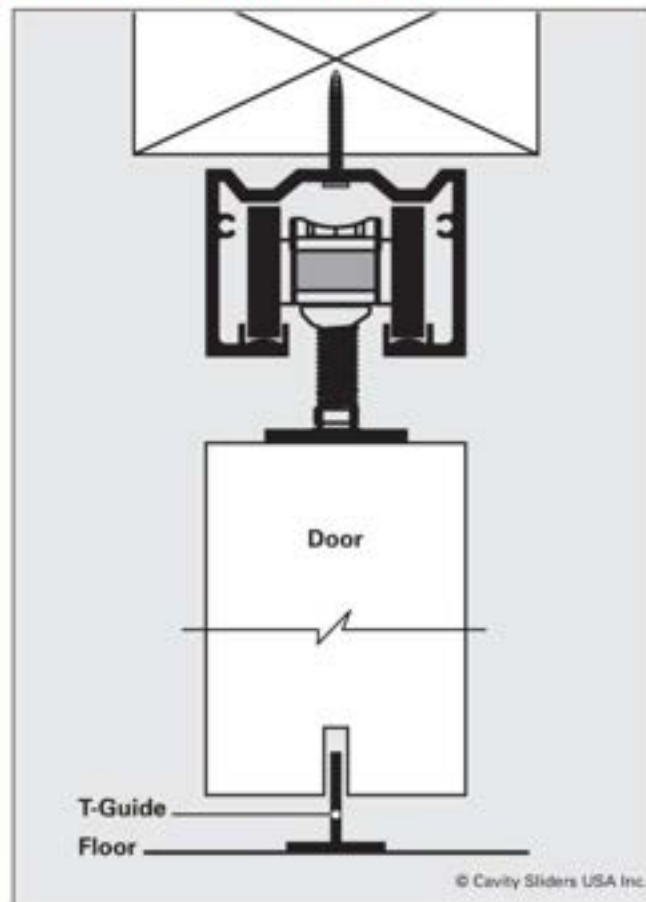

## How to Order

1. **Specify track length**  
(available in lengths up to 28')
2. **Choose an M10 carriage pack** (one per door)  
- refer to *Carriage Packs* page

**M10 (1100lb)**  
(includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench, installation instructions and stops if required)

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders**

The Pocket Door Experts

# FramelessGlass

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

The **CS Frameless Glass** clamp system is designed to take frameless glass sliding doors of 3/8" or 1/2" thickness. The clamp is compatible with all of the standard CS tracks.

Use this system for a distinctive, smooth running, reliable frameless glass sliding door.




*Pocket doors with CS Frameless Glass track systems.*



*CS Frameless Glass clamp system.*

 TrackSystems

## Technical Information

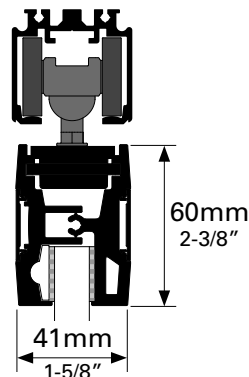

CS Frameless Glass clamp with M8 carriage

<b>Clamp Finish:</b>	Clear anodized
<b>Glass Thickness:</b>	10mm (3/8") or 12mm (1/2")
<b>Max Door Weight:</b>	240kg (500lb)
<b>Carriage Pack:</b>	M8 only

## Suggested Assembly Detail

## CS Frameless Glass Clamp Features

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:




CS Frameless Glass clamp system with CS Pocket track, M8 carriage and mounting plate

- 1 Compatible with all of the standard CS tracks (ordered separately)
- 2 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb
- 3 **CarriSnap™** quick release system allows the door to be removed easily from the track
- 4 Glass clamp rail
- 5 Removable end cap

## How to Order

The CS Frameless Glass clamp system is compatible with all of the standard CS tracks (ordered separately).

1. **Specify clamp length**  
(available in 2, 3, 4, 5 and 6' pre-cut lengths)
2. **Choose number of M8 (500lb) carriage packs**  
(one per door - includes carriages, mounting plates, fixing screws, adjusting wrench and installation instructions)
3. **Specify Frameless Glass U-Guide**  
(one per door - suits 3/8" and 1/2" glass)

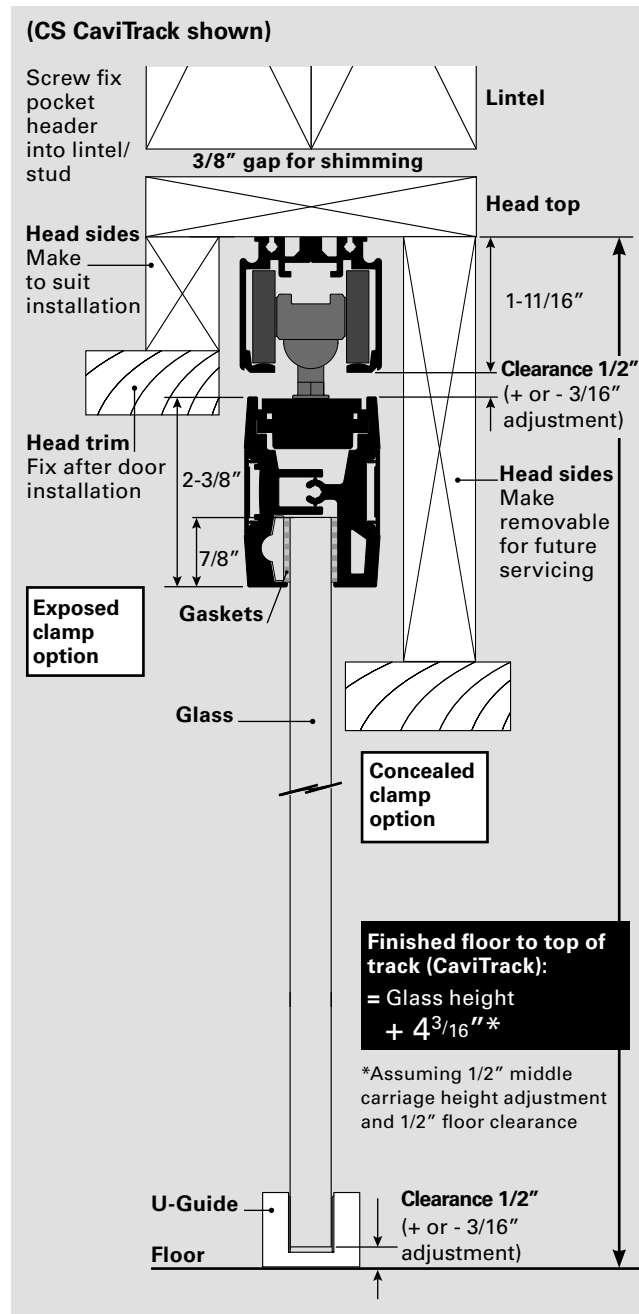

\*Assuming 1/2" middle carriage height adjustment and 1/2" floor clearance

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248




**CavitySliders**  
The Pocket Door Experts


## Carriage Packs

### M6 (200lb)


**DKM0601** - M6 Single Door with no stop

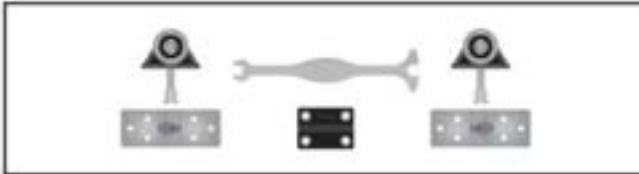

**DKM0611** - M6 Single Door with 1 stop

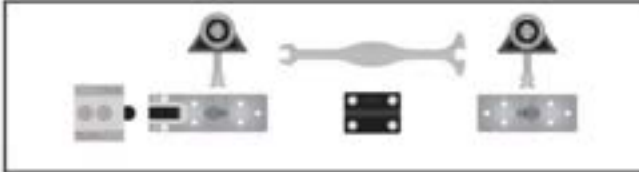


**DKM0621** - M6 Single Door with 2 stops

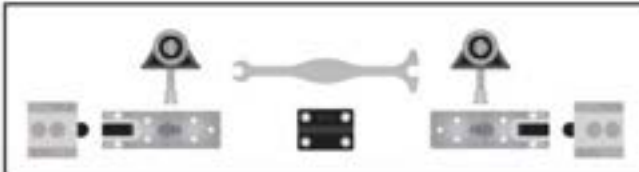


### M8 (500lb)


**DKM0801** - M8 Single Door with no stop

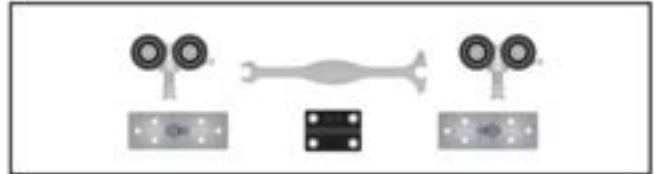

**DKM0811** - M8 Single Door with 1 stop

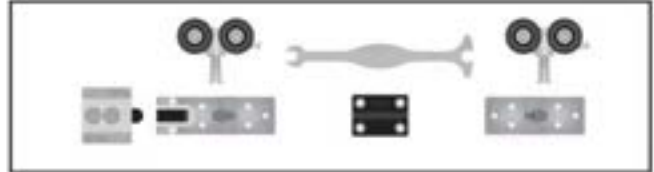


**DKM0821** - M8 Single Door with 2 stops

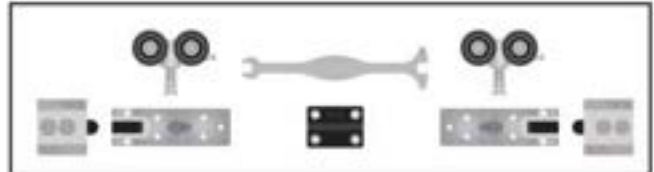

### CS SOFSTOP - Single Action


**DKS0301** (0 - 176 lb) No Stops

**DKS0401** (176 - 264 lb) No Stops

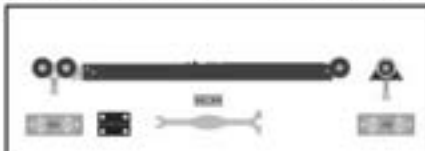


**DKS0311** (0 - 176 lb) 1 stop

**DKS0411** (176 - 264 lb) 1 stop

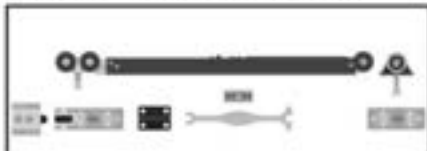

**DKS0321** (0 - 176 lb) 2 stops

**DKS0421** (176 - 264 lb) 2 stops



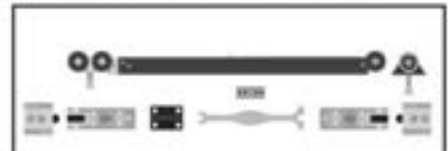


### CS SOFSTOP - Double Action

**DKS0601** (0 - 176 lb) No Stops

**DKS0611** (0 - 176 lb) 1 Stop

**DKS0621** (0 - 176 lb) 2 stops



**Note:** When using the SofStop®, the door must come to rest against a structural stop or track stop. Please consider this when selecting your carriage pack and number of stops.

### CS Barn Door Hanger Pack

**TSBS001** - CS Barn Door Hangers & Stops Pack



**TSBS100** - SofStop (264 lb) Single Pack for Barn Door Track




For double soft close and soft open, two (2) Barn DoorTrack SofStop Packs are required.


## Carriage Packs

### M10 (1100lb)


**DKM1000** - M10 Single Door with no stop

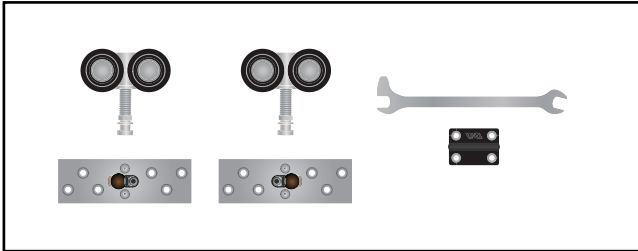

**DKM1010** - M10 Single Door with 1 stop

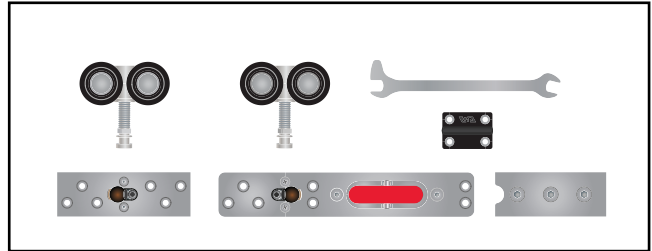

**DKM1020** - M10 Single Door with 2 stops

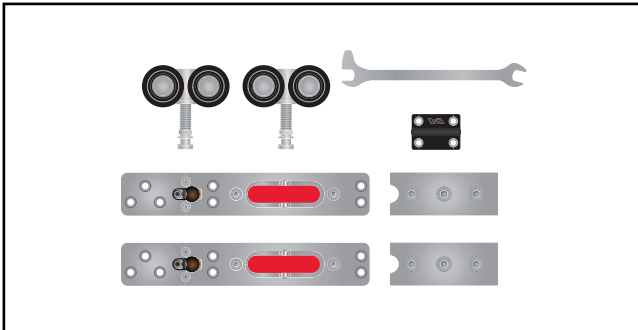

## Door Collection Systems

### M6 (200lb)

**DKO6201** - 2 Door M6 (200lb) 1 3/8" Collection Pack  
**DKO6221** - 2 Door M6 (200lb) 1 3/4" Collection Pack



**DK06301** - 3 Door M6 (200lb) 1 3/8" Collection Pack  
**DK06321** - 3 Door M6 (200lb) 1 3/4" Collection Pack



### M8 (500lb)

**DKO8201** - 2 Door M8 (500lb) 1 3/8" Collection Pack  
**DKO8221** - 2 Door M8 (500lb) 1 3/4" Collection Pack



**DK08301** - 3 Door M8 (500lb) 1 3/8" Collection Pack  
**DK08321** - 3 Door M8 (500lb) 1 3/4" Collection Pack



## Handle & Lock Product Range



### CL400® Magnetic

A range of high quality passage, privacy and locking handles suitable for single or double pocket doors.



### BarnDoorStrike

Enables the CL400 Magnetic range of sliding door hardware to be compatible for barn door applications.



### CL200 Range

A range of high quality passage and privacy handles suitable for pocket doors.



### CL100 Lever

A robust commercial grade side handle.



### CL100 FlushTurn

A circular flush turn specifically designed for sliding doors.



### Other Hardware

Flush handles and stylish edge pulls to suit timber or aluminum doors.



# CL400<sup>®</sup> Magnetic

The **CAVILOCK<sup>®</sup> CL400 Magnetic** is a range of modern architectural hardware for sliding doors. Configurations include Passage, Privacy, Bi-Parting and Key Locking.

This high quality, wrap around handle is easy to fit, requiring no complicated mortise cutout.

Available with a choice of finish options, the CL400 Magnetic is suitable for residential and light commercial use.



Watch the CL400 Magnetic video on YouTube 




*CL400 Magnetic Privacy, Satin Nickel*



*CL400 Magnetic Key Locking, Oil Rubbed Bronze*

 **CaviLock<sup>®</sup>**  
Quality Sliding Door Hardware

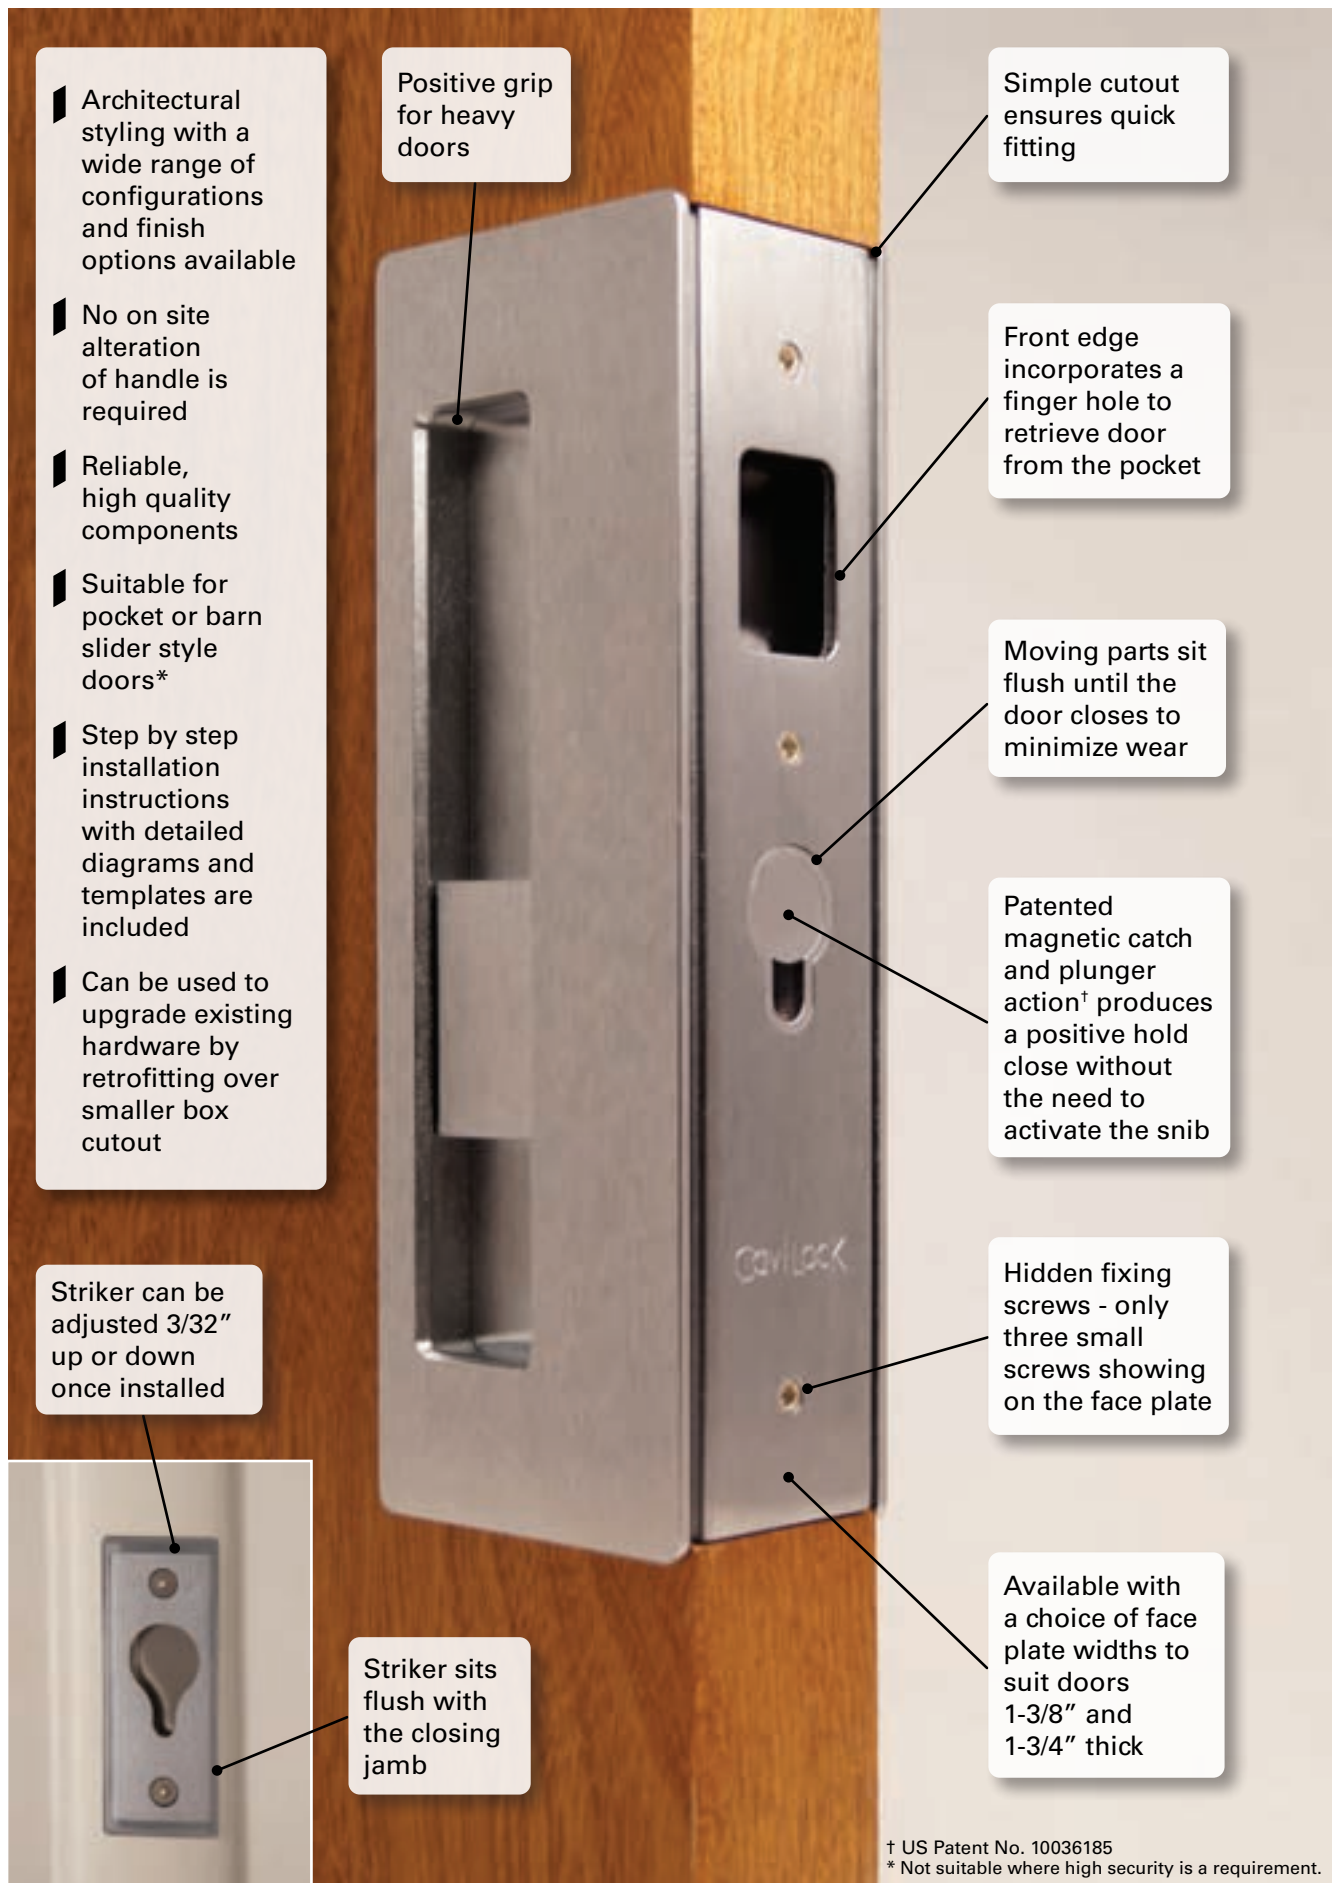


The CL400 is a stylish architectural option for passage handles. Designed to complement the privacy and locking range, this handle features a positive hold close action to ensure the door doesn't bounce off the closing jamb.

Design Features & Options

- Passage hardware matches Privacy and Key Locking hardware.
- Magnetic latch ensures door doesn't roll away from the closing jamb.
- Door slides flush back into the pocket.
- Available in a range of finishes.
- Suits doors 1-3/8" and 1-3/4" thick.
- Non-magnetic version also available.

Technical Detail

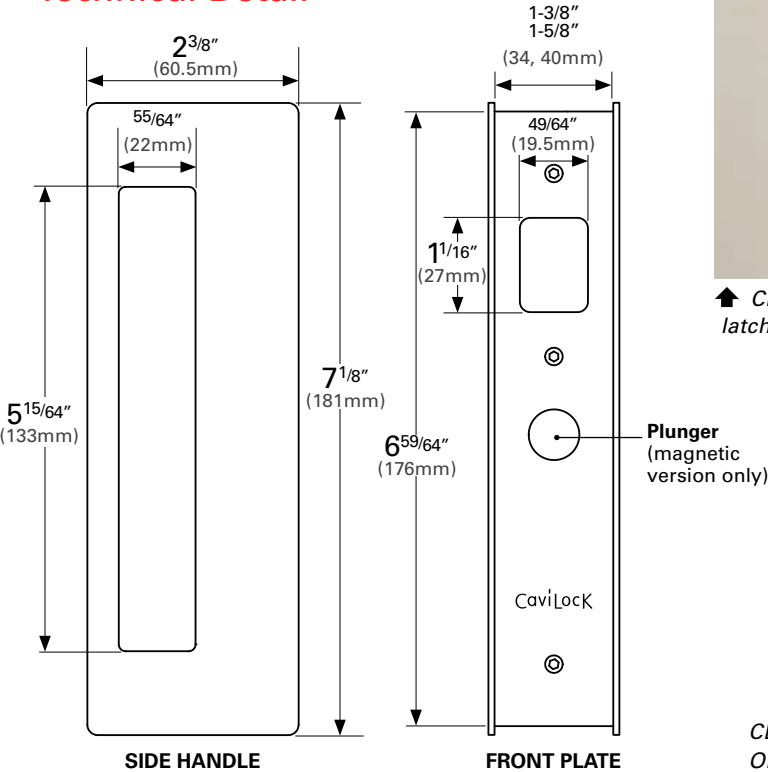

CL400 Passage (non latching). Satin Chrome finish.



CL400 Passage (latching). Oil Rubbed Bronze finish.

Selection Procedure To order, ensure you have the following information ready:

Function		Door thickness	Finish
<input type="checkbox"/>	Passage (Non Latching)	34 - 40 mm (1-3/8" to 1-9/16")	<input type="checkbox"/> Bright Chrome
<input type="checkbox"/>	Passage (Mag Latching)	40 - 46 mm (1-5/8" to 1-3/4")	<input type="checkbox"/> Satin Chrome
			<input type="checkbox"/> Oil Rubbed Bronze
			<input type="checkbox"/> Satin Nickel
			<input type="checkbox"/> Matte Black

Dimensions shown in inches (and millimeters).

The CL400 Privacy option matches the other configurations in the range. The magnetic latching feature ensures the door doesn't roll open - even if the snib is not engaged.

Design Features & Options

- Options include:  
Snib/Emergency.

Privacy hardware matches Passage and Key Locking hardware.


Door slides flush back into the pocket.
- Magnetic latch ensures door doesn't roll away from the closing jamb.

Moving parts sit flush until the door closes to minimize wear.


Available in a range of finishes.

Suits doors 1-3/8" and 1-3/4" thick.

Technical Detail

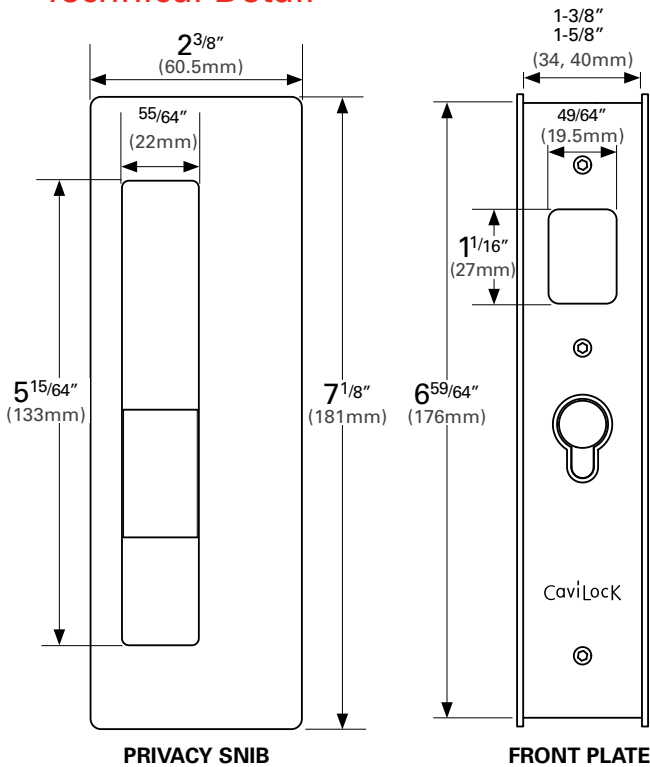

CL400 Privacy Snib/ Snib option. Satin Nickel finish.



Emergency Release can be activated with a pen in an emergency.

CL400 Privacy - Emergency Release/Snib option. Matte Chrome finish.



Selection Procedure To order, ensure you have the following information ready:

Function (see handing)	Door thickness	Finish	Handing Configuration
Snib/Emerg.	1-3/8" to 1-9/16"	Bright Chrome	Handing is determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.
	1-5/8" to 1-3/4"	Satin Chrome	
		Oil Rubbed Bronze	LH RH Snib Snib Emerg. Emerg.
		Satin Nickel	
		Matte Black	Stand looking into the pocket as shown RH LH

Dimensions shown in inches (and millimeters).

# Key Locking


The CL400 Key Locking option is suitable for residential or light commercial use in internal situations where medium security is required.

It incorporates a single or double Euro Profile cylinder with Schlage C Keyway. All Key Locking handles come with a raised shroud as standard for increased security.\*

## Design Features & Options

- Options include:
  - Key/Snib, Key/Key.
- Raised shroud included as standard for increased security.
- Key Locking hardware matches Passage and Privacy hardware.
- Door slides flush back into the pocket.
- Magnetic latch ensures door doesn't roll away from the closing jamb.
- Moving parts sit flush until the door closes to minimize wear.
- Available in a range of finishes.
- Suits doors 1-3/8" and 1-3/4" thick.

## Technical Detail

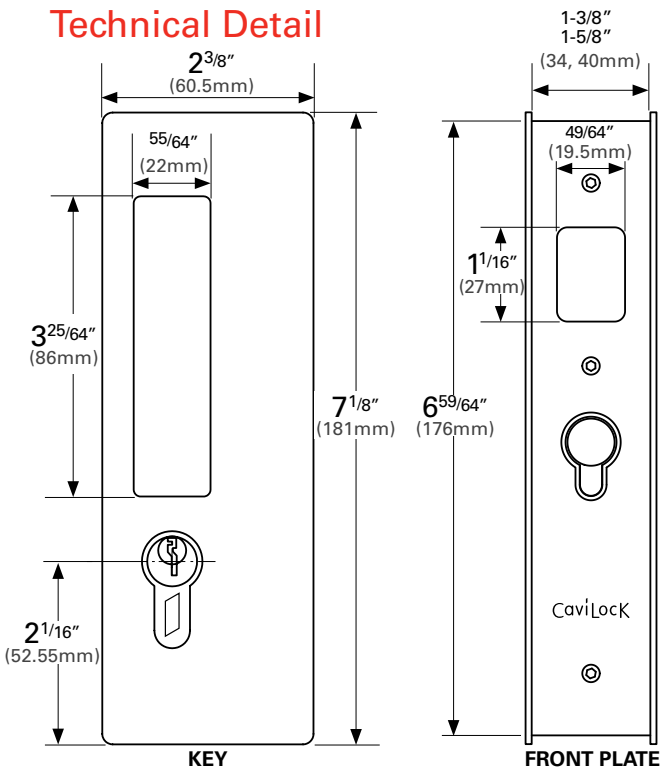

CL400 Key/Key option.  
Satin Nickel finish.



CL400 Key/Snib option.  
Oil Rubbed Bronze finish.

## Selection Procedure

To order, ensure you have the following information ready:

Function (see handing)	Door thickness	Finish	Handing Configuration
Key/Snib	1-3/8" to 1-9/16"	Bright Chrome	Handing is determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.
Key/Key	1-5/8" to 1-3/4"	Satin Chrome	
		Oil Rubbed Bronze	
		Satin Nickel	
		Matte Black	
		LH RH	Stand looking into the pocket as shown
		Key Snib	
		Key Snib	RH LH
		Key Snib	
		Key Snib	RH LH
		Key Snib	

# Bi-Parting (Double Door) Set

**CL400® Magnetic**

The CL400 Bi-Parting set is suitable for use where two doors meet in the middle. Passage, Privacy and Key Locking configurations are available.

The positive hold close action brings the doors together smoothly and holds them together until ready to open.

Note: Privacy and Key Locking configurations are not suitable as a high security option when used in a Bi-Parting door setup.


## Design Features & Options

- Options include Passage, Privacy and Key Locking.
- Bi-Parting hardware matches other hardware in the range.
- Moving parts sit flush until the door closes to minimize wear.
- Doors slide flush back into the pocket.
- Available in a range of finishes.
- Suits 1-3/8" and 1-3/4" doors.


CL400 Bi-Parting Privacy Emergency/Snib option. Satin Nickel finish. ➔




## Configurations




Passage - non latching



Passage - latching




Privacy




Key Locking

## Selection Procedure

Select the functionality and finish required from the table below to choose your Bi-Parting Pack. A matching handle set will automatically be supplied to suit your selection.




Matching Handle Set  
- Passage / Privacy




Matching Handle Set  
- Key Locking

Function	Door thickness	Finish	Handing Configuration
Bi-Parting Passage	1-3/8" to 1-9/16"	Bright Chrome	Bi-Parting Privacy Snib One Side and Key One Side handles are supplied with the Snib or Key on the right hand side only.
Bi-Parting Passage (Latching)	1-5/8" to 1-3/4"	Satin Chrome	
Bi-Parting Privacy		Oil Rubbed Bronze	Snib/Emergency Key both sides Key one side
Bi-Parting Key		Satin Nickel	
		Matte Black	




## Face Plate

Two different face plate widths are available, to suit doors 1-3/8" and 1-3/4" thick.

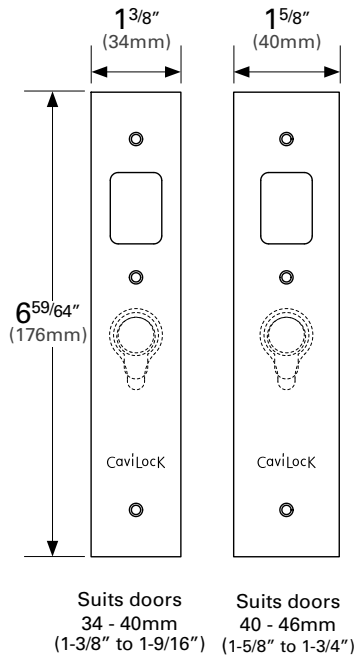


## Door Cutout

The CL400 requires a simple door cut out. Complete instructions and templates are supplied with every handle.

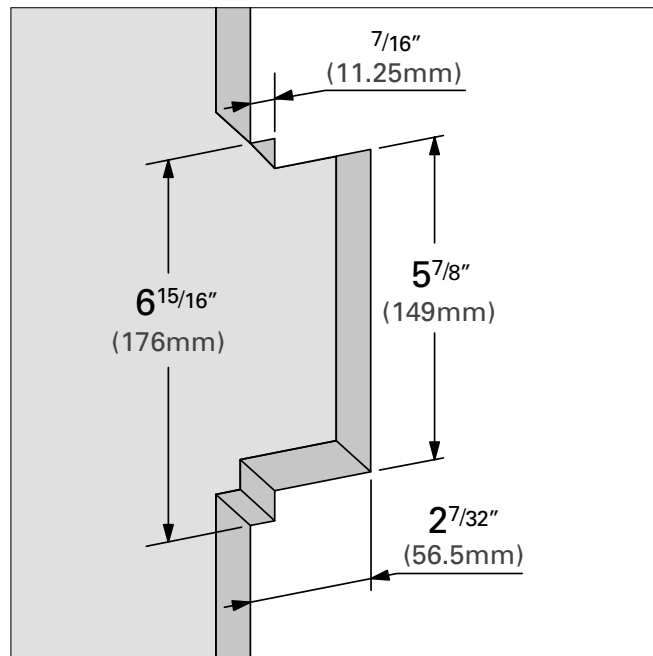

## Finish Options


All CL400 configurations are available in a range of finishes. Custom finishes are available by special order.




**Bright Chrome**




**Satin Chrome**



**Oil Rubbed Bronze**



**Satin Nickel**




**Matte Black**

## Striker


Depending on the configuration of the handle, the striker supplied is designed to either sit flush with the face of the closing jamb or recessed into the closing jamb. Striker cutout template and instructions are supplied with your handle and cover installation into a flush or recessed closing jamb.

### Recessed striker - Key Locking handles

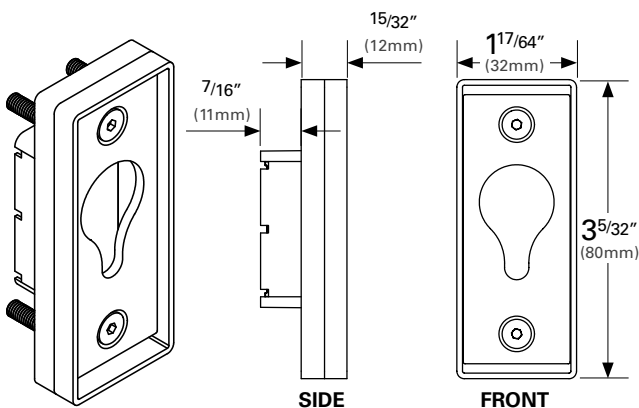

Dimensions shown in inches (and millimeters).

### Flush striker - Privacy & Passage handles

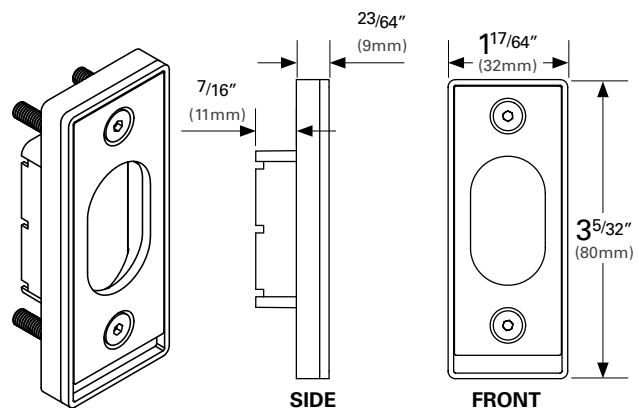

# BarnDoorStrike

The **CaviLock Barn Door Strike** makes the CL400 Magnetic range of sliding door hardware compatible for barn door applications.

It is available for use with CL400 Magnetic Passage, Privacy and Key Locking configurations and CL400 ADA Passage and Privacy handles.



**ADA**



*CaviLock Barn Door Strike with CL400 ADA Magnetic handle.*



*CaviLock Barn Door Strike with CL400 Magnetic Privacy handle.*

 **CaviLock®**  
Quality Sliding Door Hardware


## Design Features & Options

- Suitable for doors 1-3/8" or 1-3/4" thick.
- ADA compliant with the use of the CL400 ADA handle.
- Easy to install.
- Available in a range of finishes.
- Suitable for use with CL400 Passage, Privacy and Key Locking handles.

## Dimensions


A hidden bracket is supplied as standard.

A right angle bracket can be ordered where additional fixing strength is required, e.g. heavy commercial use.

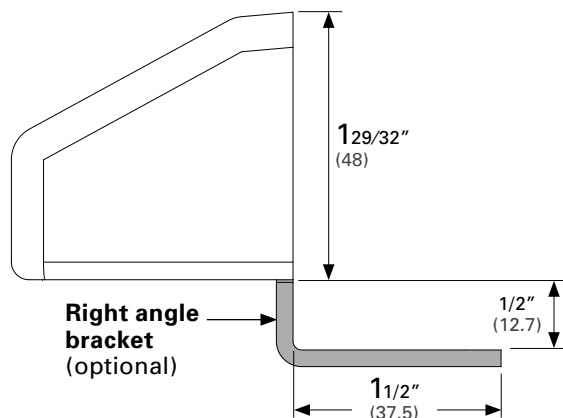

## Product Codes & Finish Options

	Finish	Barn Door Strike	Right Angle Bracket
	Bright Chrome	CL400SA0025	CL400BA0025
	Satin Chrome	CL400SA0125	CL400BA0125
	Oil Rubbed Bronze	CL400SA0225	CL400BA0225
	Satin Nickel	CL400SA0325	CL400BA0325
	Matte Black	CL400SA0425	CL400BA0425
	Paint Primed White	CL400SA0725	CL400BA0725

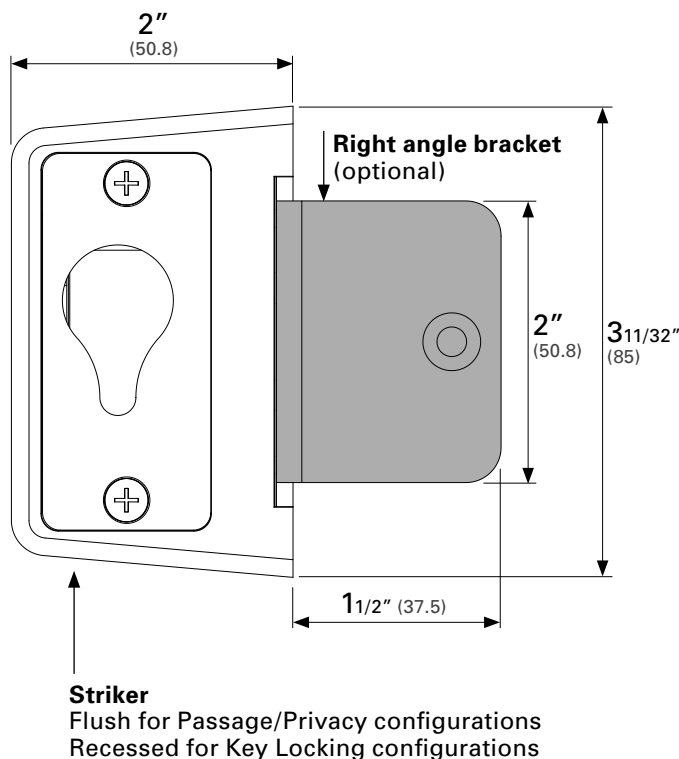

Drawings & pictures are not to scale. Colors shown may not accurately represent product All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# CL200 Range

The **CL200** is a durable range of sliding door hardware suitable for residential, commercial, and hospitality applications.

Privacy handles incorporate a patented magnetic latching system\*, ensuring a smooth locking action. This handle is not handed.

Two face plate widths are available. Handles can be adjusted to suit doors from 1-3/8" to 1-1/2" or 1-5/8" to 1-3/4" thick.

\*Patent pending




*CaviLock CL200 Passage handle*



*CaviLock CL200 Privacy handle*

 **CaviLock®**  
Quality Sliding Door Hardware

## Dimensions

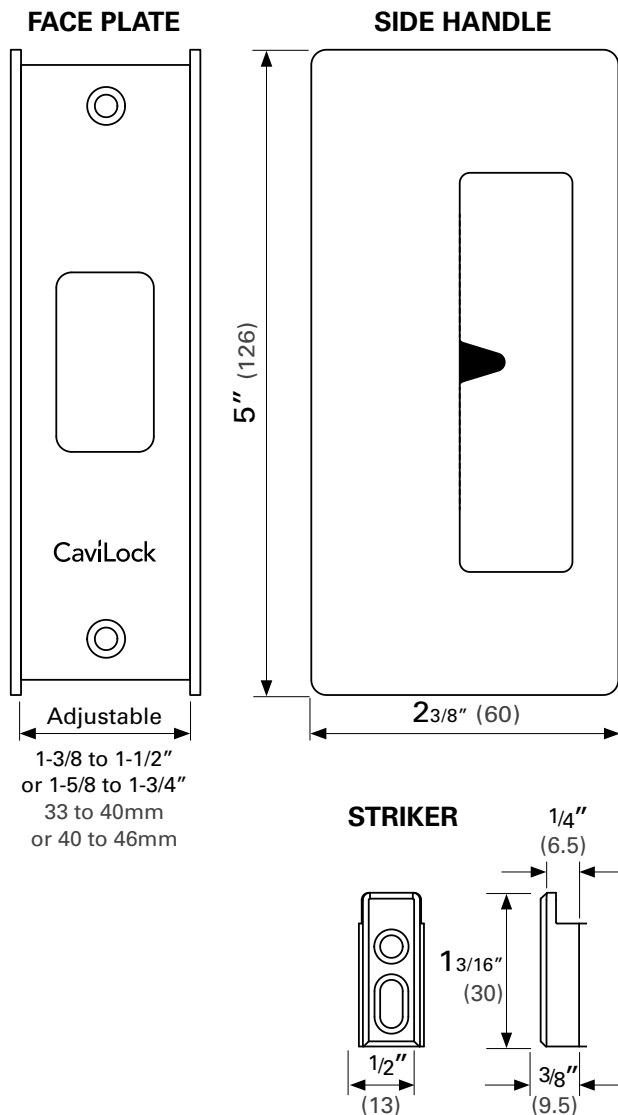


## Features

- Passage, Privacy and Bi-Parting options are available in a range of finishes.
- Suitable for use on timber or aluminum doors.
- Integrated snib button allows more space in the side pull.
- Handles are not handed.
- Large finger pull has more depth for greater purchase.
- Simple installation with easy to follow instructions.


## Configurations

### CL205 A - Passage (non-latching)



Passage handles are suitable for situations where locking or latching is not required. These handles do not have a striker or magnet.

### CL205 D - Privacy Snib/Emergency



Privacy handles have a discreet triangular shaped snib button on one side and Emergency Release on the other side. They are suitable for sliding doors where latching is required.




Privacy Snib Button



Emergency Release


### CL205 C - Bi-Parting Mate (to latch with Privacy)



The Bi-Parting mate includes a striker on the face plate to enable it to magnetically latch with a privacy handle.

For Bi-Parting passage doors, order two single passage handles.

## Finish Options

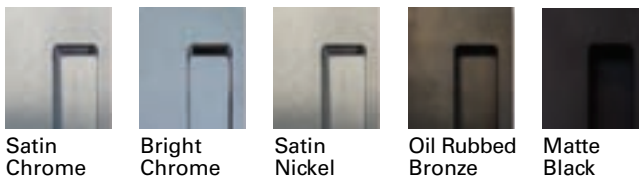

Non-standard finishes are available on request. Longer lead times and surcharges will apply.

Drawings & pictures are not to scale. Colors shown may not accurately represent product All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders™**  
The Pocket Door Experts

# CL100 Lever

The **CaviLock® CL100 Lever** is the most common commercial side handle fitted to the **CL100 Mortise Lock**. It is robust and strong and has a commercial look that matches other commercial handles and locks in most applications. The vertical lever grip enables a positive pull action on even the heaviest doors.




*CaviLock CL 100 Lever with Key on aluminum door.*



*CaviLock CL100 Lever with Key on timber door.*

 **CaviLock®**  
Quality Sliding Door Hardware

## Dimensions

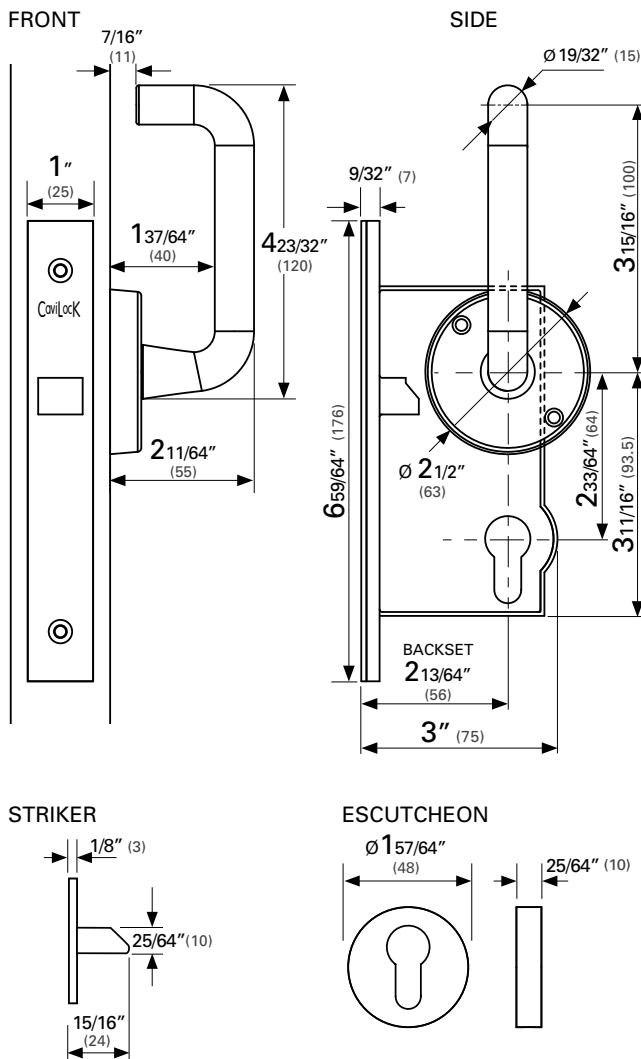

## Key Locking

Key locking may be added to the CL100 Mortise Lock with the addition of a Euro Profile cylinder with American Schlage C Keyway, specified as either KA (Keyed Alike) or KD (Keyed to Differ).

Options include:

- Turn/Emergency
- Turn/Key
- Key/Key
- Key One Side

Please note that this specification is suitable for 1-3/4" thick doors and must be done at time of order.



CL100 Lever (Key/Turn option).




## Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel

## Finish Options & Configurations

Available in Satin Chrome. Cylinders are not handed.

CL100A7002	Lever - Key/Key
CL100A7010	Lever - Key/Turn
CL100A7004	Lever - Key One Side
CL100A7014	Lever - Turn/Emerg
CL100B5002	Lever Only



## CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options.



- Suitable for pocket doors and surface sliding doors
- Easy to operate
- Corrosion resistant
- For use with timber or aluminum doors

Drawings & pictures are not to scale. All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# CL100 FlushTurn

The **CaviLock® CL100 Flush Turn** is specifically designed for sliding doors. It incorporates machined brass components that are satin chrome plated.

Because of its shallow fitting depth and positive feel to the turn, this is a popular side handle for both latching and non-latching applications.

When combined with the CL100 Mortise Lock and euro profile cylinder it makes for a great looking medium security option.

**Requires minimum door thickness of 1-1/2" (37mm).**




*CaviLock CL100 Flush Turn in Satin Chrome*



*CaviLock CL100 Flush Turn with Key in Satin Chrome*

 **CaviLock®**  
Quality Sliding Door Hardware

## Dimensions

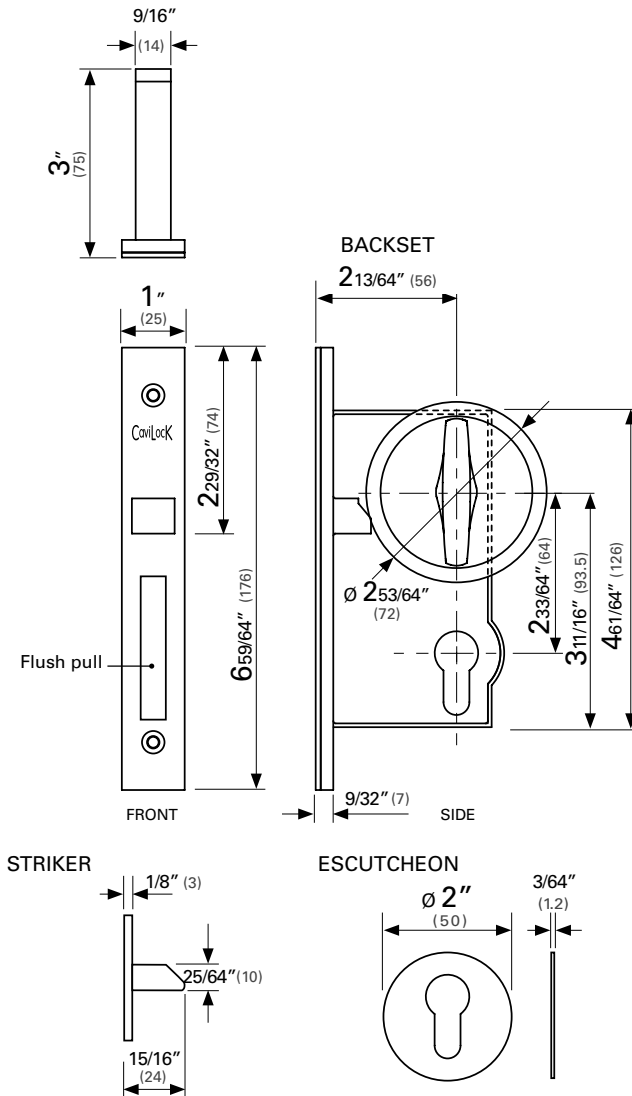

## Flush Pulls

All CL100 Lock Cases come with the option of a built-in Flush Pull in either Stainless Steel.

This Flush Pull is designed for use on doors which slide completely inside a wall.



CL100 Flush Turn and Flush Pull on aluminum door leaf.

## Key Locking

Key locking may be added to the CL100 Mortise Lock with the addition of a Euro Profile cylinder with American Schlage C Keyway, specified as either KA (Keyed Alike) or KD (Keyed to Differ).

Please note that this specification is suitable for 1-3/4" thick doors and must be done at time of order.



CL100 Flush Turn with key.


## Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel.

## Finish Options & Configurations

Available in Satin Chrome. Cylinders are not handed.

CL100A1004 Flush Turn - Key/Key



CL100A1006 Flush Turn - Key One Side



CL100A9004 Flush Turn only

## CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options.



- ▀ Suitable for pocket doors and surface sliding doors
- ▀ Easy to operate
- ▀ Corrosion resistant
- ▀ For use with timber or aluminum doors

Drawings & pictures are not to scale. All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders™**  
The Pocket Door Experts

# Louey SideHandle

The **Louey** is a high quality side handle machined from brass, finished in either brushed chrome or oil rubbed bronze. The handle has four countersunk fixing points at its corners and a 3/8" deep recessed hand grip for a positive pull on even heavy doors.

## Timber EdgePull

The **Timber Edge Pull** is a high-quality front edge pull for timber doors, often used together with the Louey.



*CaviLock Louey handles on Bi-Parting pocket doors.*



*CaviLock Louey with Timber Edge Pull in Satin Chrome*

 **CaviLock®**


Quality Sliding Door Hardware

# Louey SideHandle



Louey fitted to aluminum door.

## Dimensions

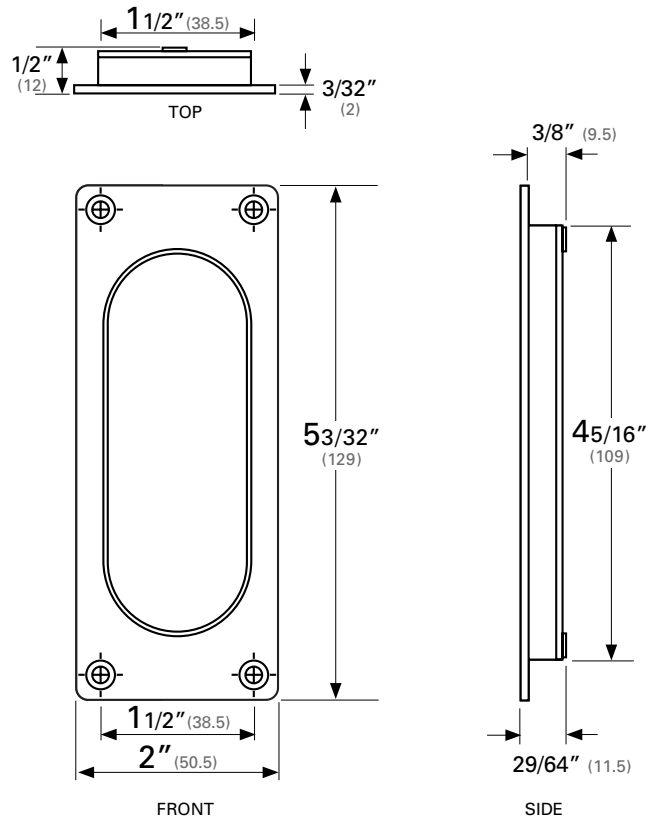

## Finish Options

■ Satin Chrome  
CL100I3000

■ Oil Rubbed Bronze  
CL100I3005

# Timber EdgePull

The **Timber Edge Pull** is a high-quality front edge pull for timber doors. The body is machined from solid brass and the pull is made from cast stainless steel. It is strong enough to provide a positive grip on even the heaviest doors.

Once installed, this edge pull sits virtually flush with the edge of the door and has no visible screw fixings.




Timber Edge Pull in Satin Chrome

## Finish Options

■ Satin Chrome  
CL800A4020

■ Oil Rubbed Bronze  
CL800A4021

## Dimensions

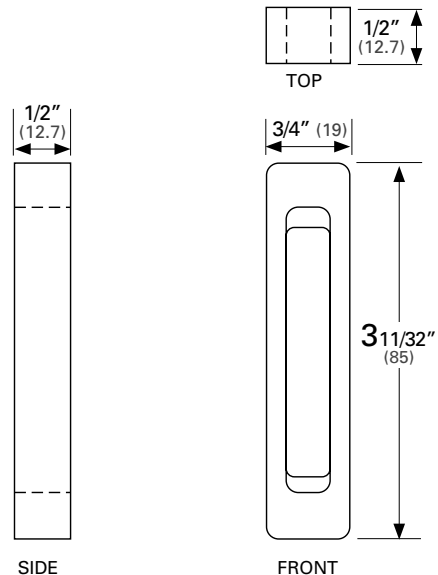

Drawings & pictures are not to scale. All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Quality products from:

 **CavitySliders**  
Quality Sliding Door Hardware



## ADA Handle & Lock Product Range



**CaviLock®**

### **CL400® ADA Magnetic**

A range of high quality passage and privacy hardware with offset pull handle. Suitable for single or double pocket doors.



### **BarnDoorStrike**

Enables the CL400 Magnetic range of sliding door hardware to be compatible for barn door applications.



### **CL100 ADA LaviLock**

Commercial grade disabled rest room access lock with privacy indication.



### **CL100 ADA IndicatorLock**

Commercial grade disabled access lock with privacy indication.



### **CL100 ADA Lever**

Commercial grade privacy or key lock with lever handle



### **CL100 Lever**

Commercial grade lever handle



# CL400® ADA Magnetic

The new **CL400® ADA Magnetic** matches the look and functionality of the existing CL400 Magnetic range of pocket door hardware, with added ADA functionality.

Utilizing the patented magnetic mechanism of the CL400 Magnetic, this new addition to the range provides flexibility for building owners. The CL400 ADA uses the same door cutout and striker and is able to be retrofitted over existing CL400 flush handles for the requirements of ADA tenants.

The CL400 ADA is compatible with egress applications.



**ADA**



*CL400 ADA Privacy Snib in satin chrome finish.*



*CaviLock CL400 ADA Privacy with Emergency Release*

 **CaviLock®**  
Quality Sliding Door Hardware


In line with ADA Standards for Accessible Design, the CL400 ADA Magnetic has a handle that is easy to grasp with one hand and does not require tight grasping, tight pinching or twisting of the wrist.

The opening force required to operate the unit is 2.5lbf (11.1N), which is under the 5lbf threshold for ADA compliance.

## Design Features & Options

- Easy to use - no tight pinching or twisting of the wrist.
- Patented magnetic functionality.
- Striker sits flush with closing jamb.
- See at a glance whether a room is occupied.
- Matches other hardware in the CL400 range.

## Dimensions

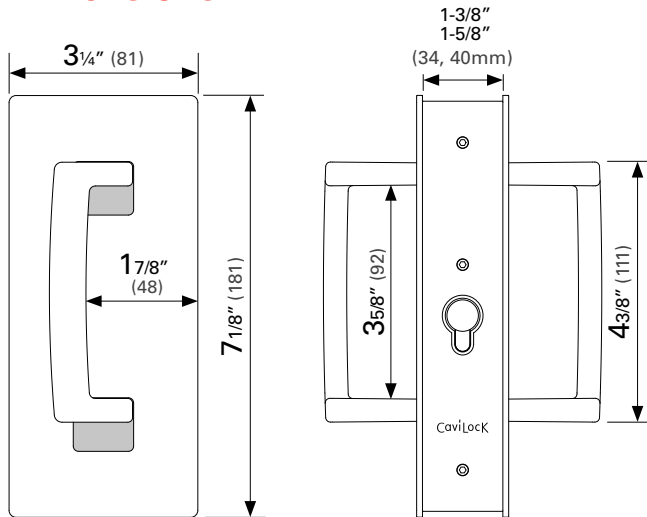

## Finish Options



Chrome

Satin Chrome


Oil Rubbed  
Bronze

Satin Nickel

**Other finish options available on request.**

(Note: Longer lead times and additional surcharges may apply.)

## Configuration Options

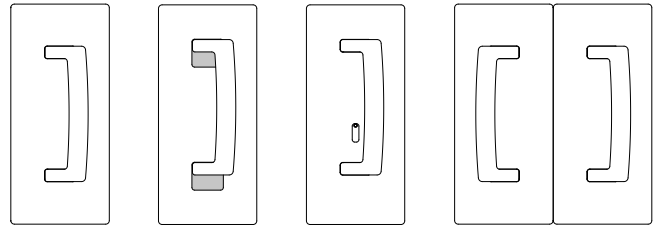


Passage

Privacy

Emergency  
Release

Bi-Parting  
(Passage or Privacy)


## Door Cutout

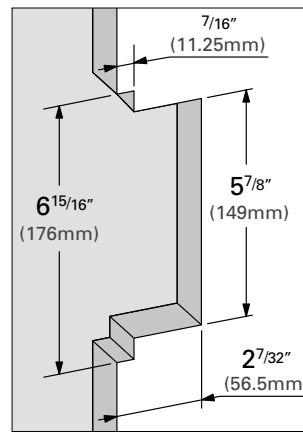

**IMPORTANT:** Operable parts of hardware must be mounted 34" (865mm) min. and 48" (1220 mm) max. above finished floor to meet ADA guidelines.

The clear width of the door opening must be a minimum of 32". Always check State and Federal guidelines relating to the specific project.

## Selection Procedure To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration
Single Door	Bright Chrome	1-3/8" to 1-9/16"	<p>Handing must be determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.</p> <div> <div> <div>LH</div> <div>RH</div> </div> <div> <div>Snib</div> <div>Snib</div> </div> <div> <div>Emerg.</div> <div>Emerg.</div> </div> </div> <p>Stand looking into the pocket as shown</p> 
Bi-Parting Door	Satin Chrome	1-5/8" to 1-3/4"	
Passage (Non Latching)	ORB		
Passage (Mag Latching)	Satin Nickel		
Privacy Locking	Special Order		

Drawings & pictures are not to scale. Colors shown may not accurately represent product All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders**  
The Pocket Door Experts

# BarnDoorStrike

The **CaviLock Barn Door Strike** makes the CL400 Magnetic range of sliding door hardware compatible for barn door applications.

It is available for use with CL400 Magnetic Passage, Privacy and Key Locking configurations and CL400 ADA Passage and Privacy handles.



**ADA**



*CaviLock Barn Door Strike with CL400 ADA Magnetic handle.*



*CaviLock Barn Door Strike with CL400 Magnetic Privacy handle.*

 **CaviLock®**  
Quality Sliding Door Hardware


## Design Features & Options

- Suitable for doors 1-3/8" or 1-3/4" thick.
- ADA compliant with the use of the CL400 ADA handle.
- Easy to install.
- Available in a range of finishes.
- Suitable for use with CL400 Passage, Privacy and Key Locking handles.

## Dimensions


A hidden bracket is supplied as standard.

A right angle bracket can be ordered where additional fixing strength is required, e.g. heavy commercial use.

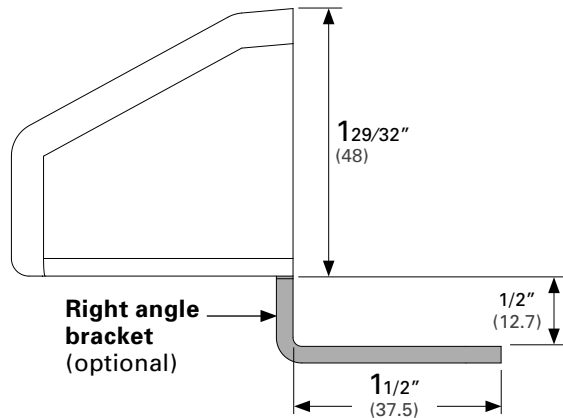

## Product Codes & Finish Options

	Finish	Barn Door Strike	Right Angle Bracket
	Bright Chrome	CL400SA0025	CL400BA0025
	Satin Chrome	CL400SA0125	CL400BA0125
	Oil Rubbed Bronze	CL400SA0225	CL400BA0225
	Satin Nickel	CL400SA0325	CL400BA0325
	Matte Black	CL400SA0425	CL400BA0425
	Paint Primed White	CL400SA0725	CL400BA0725

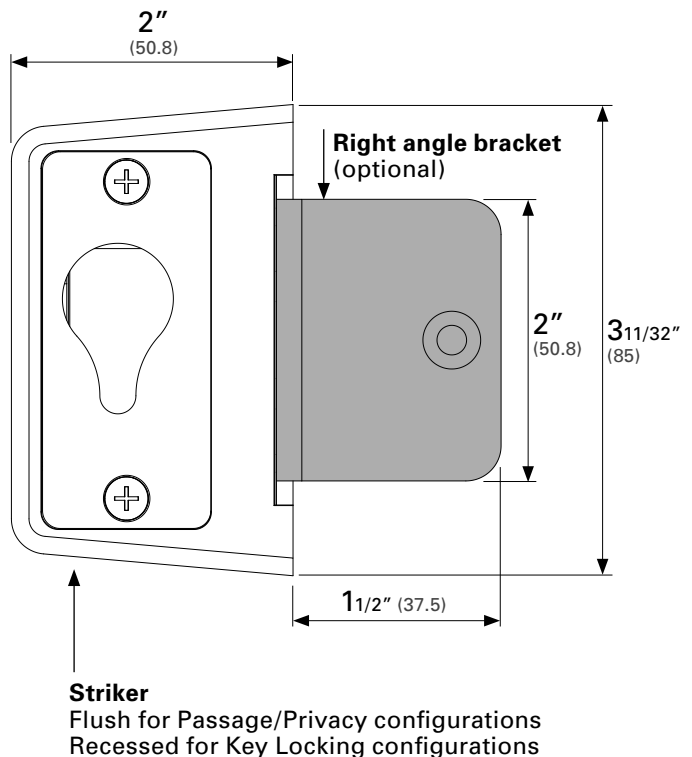

Drawings & pictures are not to scale. Colors shown may not accurately represent product All dimensions in inches (and mm).

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# CL100 ADA LaviLock

The **CL100 ADA LaviLock** is a disabled access lockset designed with ease of use and longevity of service in mind. Brass and stainless steel working components ensure reliability.

The LaviLock is self-latching and utilizes 'fail safe' single action egress functionality.

The Indicator Lock is supplied as a complete set including CL100 Mortise Lock Case, Lever Handles, Stainless Steel Indication Plates and Slide Locking Buttons including Emergency Release.



**ADA**



*CaviLock CL100 LaviLock in Satin Chrome fitted to door mounted on CS WallMount Track*




*'Vacant/In Use' indicator plate with Emergency Release on outside door face.*

*Easy to use 'Unlock/Lock' lever on inside door face.*

 **CaviLock®**

Quality Sliding Door Hardware

## Dimensions

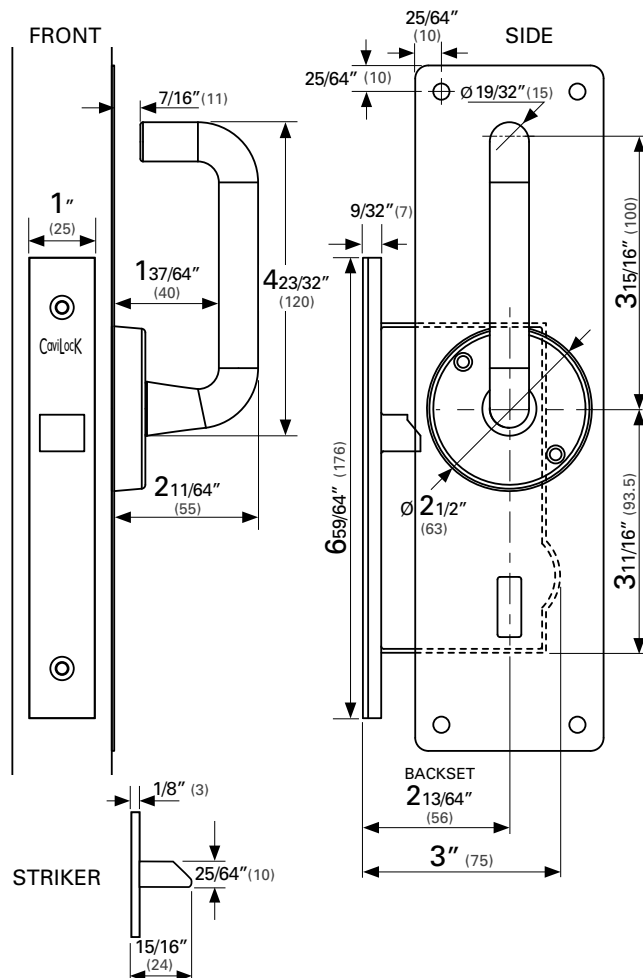


In line with ADA Standards for Accessible Design, the CL100 LaviLock has a lever that is easy to grasp with one hand and does not require tight grasping, tight pinching or twisting of the wrist. The opening force required to operate the unit is less than 5lbf (22.2N), which is under the threshold for ADA compliance.

**IMPORTANT:** Operable parts of hardware must be mounted 34" (865mm) min. and 48" (1220 mm) max. above finished floor to meet ADA guidelines. The clear width of the door opening must be a minimum of 32". Always check State and Federal guidelines relating to the specific project.

## Handing

The CL100 LaviLock is handed and handing must be specified at time of order.

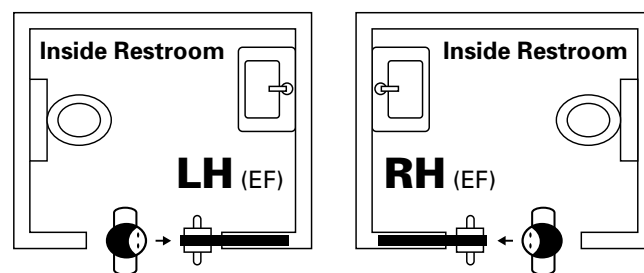

When standing looking into the pocket, if the locking snib is on your **left hand** side then the **LaviLock** is a Left Hand lock.

When standing looking into the pocket, if the locking snib is on your **right hand** side then the **LaviLock** is a Right Hand lock.

**EF = Egress Free** - Even when in locked position the handle on the **inside** remains unlocked.

## Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel

## Finish Options & Configurations

Available in Satin Chrome. The CL100 ADA LaviLock is handed. Please check the Handing diagram above before ordering.

CL100B3008	ADA LaviLock - Right Hand
CL100B3010	ADA LaviLock - Left Hand

If LaviLock is to be installed into areas where there is exposure to corrosive environments, e.g. high chlorine or salt concentration, contact us for an appropriate solution.

Drawings & pictures are not to scale. All dimensions in inches (and mm).

## CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options. The internal components have been built to resist corrosion, making it suitable for both internal and external use in commercial, architectural and residential applications.



- Slimline mortise is compatible with doors 1-3/8" or thicker.
- Suitable for pocket doors and surface sliding doors
- Easy to operate
- Corrosion resistant
- For use with timber or aluminum doors

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# CL100 ADA Indicator Lock

The **CL100 ADA Indicator Lock** is a disabled access lockset designed with ease of use and longevity of service in mind. Brass and stainless steel working components ensure reliability.

The Indicator Lock is self-latching and utilizes 'fail safe' single action egress functionality.

The Indicator Lock is supplied as a complete set including CL100 Mortise Lock Case, Lever Handles, Stainless Steel Indication Plates and Slide Locking Buttons including Emergency Release.



ADA



*CaviLock CL100 ADA Indicator Lock - Outside door face*




*CaviLock CL100 ADA Indicator Lock - Inside door face*

 **CaviLock®**

Quality Sliding Door Hardware

## Dimensions

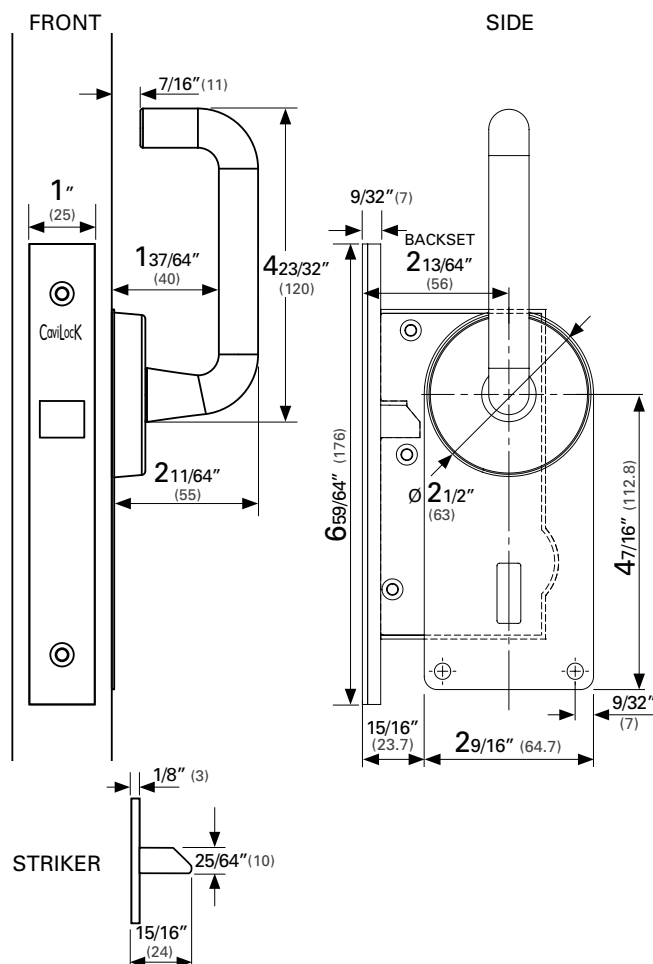


In line with ADA Standards for Accessible Design, the CL100 Indicator Lock has a lever that is easy to grasp with one hand and does not require tight grasping, tight pinching or twisting of the wrist. The opening force required to operate the unit is less than 5lbf (22.2N), which is under the threshold for ADA compliance.


**IMPORTANT:** Operable parts of hardware must be mounted 34" (865mm) min. and 48" (1220 mm) max. above finished floor to meet ADA guidelines. The clear width of the door opening must be a minimum of 32". Always check State and Federal guidelines relating to the specific project.

## Handing

The CL100 Indicator Lock is handed and handing must be specified at time of order.



When standing looking into the pocket, if the locking snib is on your **left hand** side then the **Indicator Lock** is a Left Hand lock.



When standing looking into the pocket, if the locking snib is on your **right hand** side then the **Indicator Lock** is a Right Hand lock.

**EF** = Egress Free - Even when in locked position the handle on the **inside** remains unlocked.

## Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel

## Finish Options & Configurations

Available in Satin Chrome. The CL100 ADA Indicator Lock is handed. Please check the Handing diagram above before ordering.

CL100B3015	ADA Indicator Lock - Right Hand
CL100B3016	ADA Indicator Lock - Left Hand

If Indicator Lock is to be installed into areas where there is exposure to corrosive environments, e.g. high chlorine or salt concentration, contact us for an appropriate solution.

Drawings & pictures are not to scale. All dimensions in inches (and mm).

## CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options. The internal components have been built to resist corrosion, making it suitable for both internal and external use in commercial, architectural and residential applications.



▀ Slimline mortise is compatible with doors 1-3/8" or thicker.

▀ Suitable for pocket doors and surface sliding doors

▀ Easy to operate

▀ Corrosion resistant

▀ For use with wooden or aluminum doors

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# CL100 ADA Lever

The **CaviLock® CL100 ADA Lever** is a disabled access lockset designed with ease of use and longevity of service in mind. Brass and stainless steel working components ensure reliability.

The privacy turn has been designed in accordance with ADA Accessibility Guidelines for Buildings and Facilities and **is easily operable without pinching, grasping or twisting of the wrist.**

The vertical lever grip enables a positive pull action on even the heaviest doors.



ADA



*CaviLock CL100 ADA Lever fitted to aluminum door.*




*CaviLock CL100 ADA Lever on timber door.*

 **CaviLock®**

Quality Sliding Door Hardware

## Dimensions

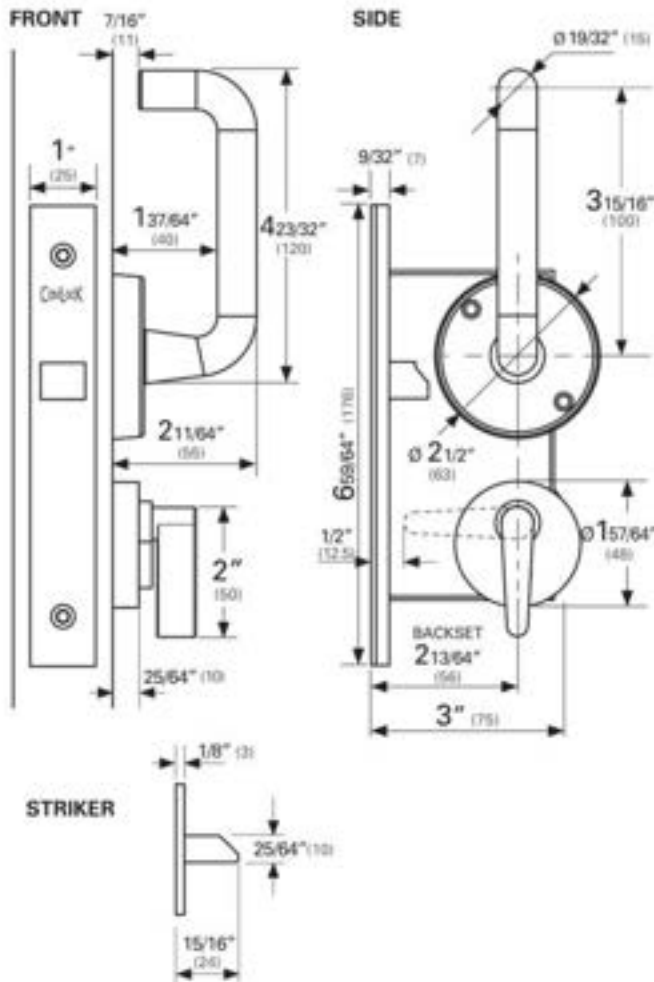

In line with ADA Standards for Accessible Design, the CL100 ADA Lever handle is easy to grasp with one hand and does not require tight grasping, tight pinching or twisting of the wrist. The opening force required to operate the unit is less than 5lbf (22.2N), which is under the threshold for ADA compliance.

**IMPORTANT:** Operable parts of hardware must be mounted 34" (865mm) min. and 48" (1220 mm) max. above finished floor to meet ADA guidelines. The clear width of the door opening must be a minimum of 32". Always check State and Federal guidelines relating to the specific project.



CaviLock CL100 ADA Lever Turn/Key option

## Key Locking

The CL100 ADA Lever includes a Euro Profile cylinder with American Schlage C Keyway, specified as either KA (Keyed Alike) or KD (Keyed to Differ). It is most suitable for 1-3/4" thick doors.



## Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel

## Finish Options & Configurations

Available in Satin Chrome. Cylinders are not handed.

CL100A7018 Lever - ADA Turn / Key



CL100A7020 Lever - ADA Turn / Emergency



Drawings & pictures are not to scale. All dimensions in inches (and mm).

## CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options.



- Suitable for pocket doors and surface sliding doors
- Easy to operate
- Corrosion resistant
- For use with timber or aluminum doors

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



Another quality product from:

**CavitySliders**  
Quality Sliding Door Hardware

# AutoCav™ Commercial

The **CS AutoCav Commercial** has been developed to provide a high quality automated pocket door for almost any situation. The CS AutoCav suits, commercial, architectural and healthcare projects.

A number of operating devices are compatible with this system. Installation instructions and comprehensive support are provided. Future servicing (if required) is made easy via the supplied track access panel.



*CS AutoCav 120 FramelessGlass pocket door with secure entry.*



*CS AutoCav 90 with aluminum door.*

High quality components have been designed for all parts of the system. This ensures reduced servicing intervals and product longevity. CS can supply a complete system including design and manufacture.

 AutomaticUnits

## Features

- Self-tensioning pulley and heavy duty belt ensure years of service without the need to tighten any belts.
- Heavy duty, one piece extruded aluminium track.
- Carriages with nylon wheels and enclosed bearing races for smooth, maintenance-free operation.
- Access points in head unit ensure access to the track section is always possible.
- Safety beam sensors provide obstacle detection through the opening if required.
- Fully programmable controller with many standard operating modes. Includes built in safety beam controller, object detection and smart learning modes.
- Precision cut metal gears and oil filled gearbox for reliability and strength. Motor locks doors in place without the need for solenoid or magnetic locking devices.
- Quality components have been designed for all parts of the system, ensuring reduced servicing intervals and product longevity.
- No visible floor track.



## Design Features & Options

- Interface capable - can be wired to an overriding PLC or to work in conjunction with fire alarms and security.
- In the event of power failure, the door can be manually opened or a battery backup can be supplied.
- Compatible with most control switching devices.
- Safety features include electronic obstacle detection and auto-reversing of the door upon meeting an obstruction.

## Access Control Options

A variety of access control options are available, from simple push button or overhead sensor to secure entry via touch pad, swipe key or a combination of methods.



## Suitable Door Types

Can be specified with almost any choice of door that reaches a minimum door width of 34" (860mm) and a maximum door width of 60" (1524mm).




## Rough Opening

Useful formulas	Single	Bi-Parting
Rough opening height	Door height + 10 1/4" (260mm)	
Rough opening width	(Door width x2) + 1-3/16" (30mm)	(Door width x4) + 7/16" (10mm)



Max. Weight  
200kg



Min. Width  
860mm



Fully  
Programmable



Operating  
Devices



Locking  
(optional)



Safety  
Beams



Speed  
Adjustment

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248




**CavitySliders™**  
The Pocket Door Experts

# AutoCav™ Residential

The CS AutoCav Residential is a completely automated pocket door system featuring a plug & play design that is easy to install and use. It is suitable for numerous different door styles and the unit is pre-commissioned on manufacture so that it can be plugged in and work straight away as soon as it is installed.

Suitable for high use areas such as butler's pantries and internal access to garage or anywhere you want to make a statement. Competitive pricing makes this a cost effective solution for residential projects where automatic sliding doors are required.

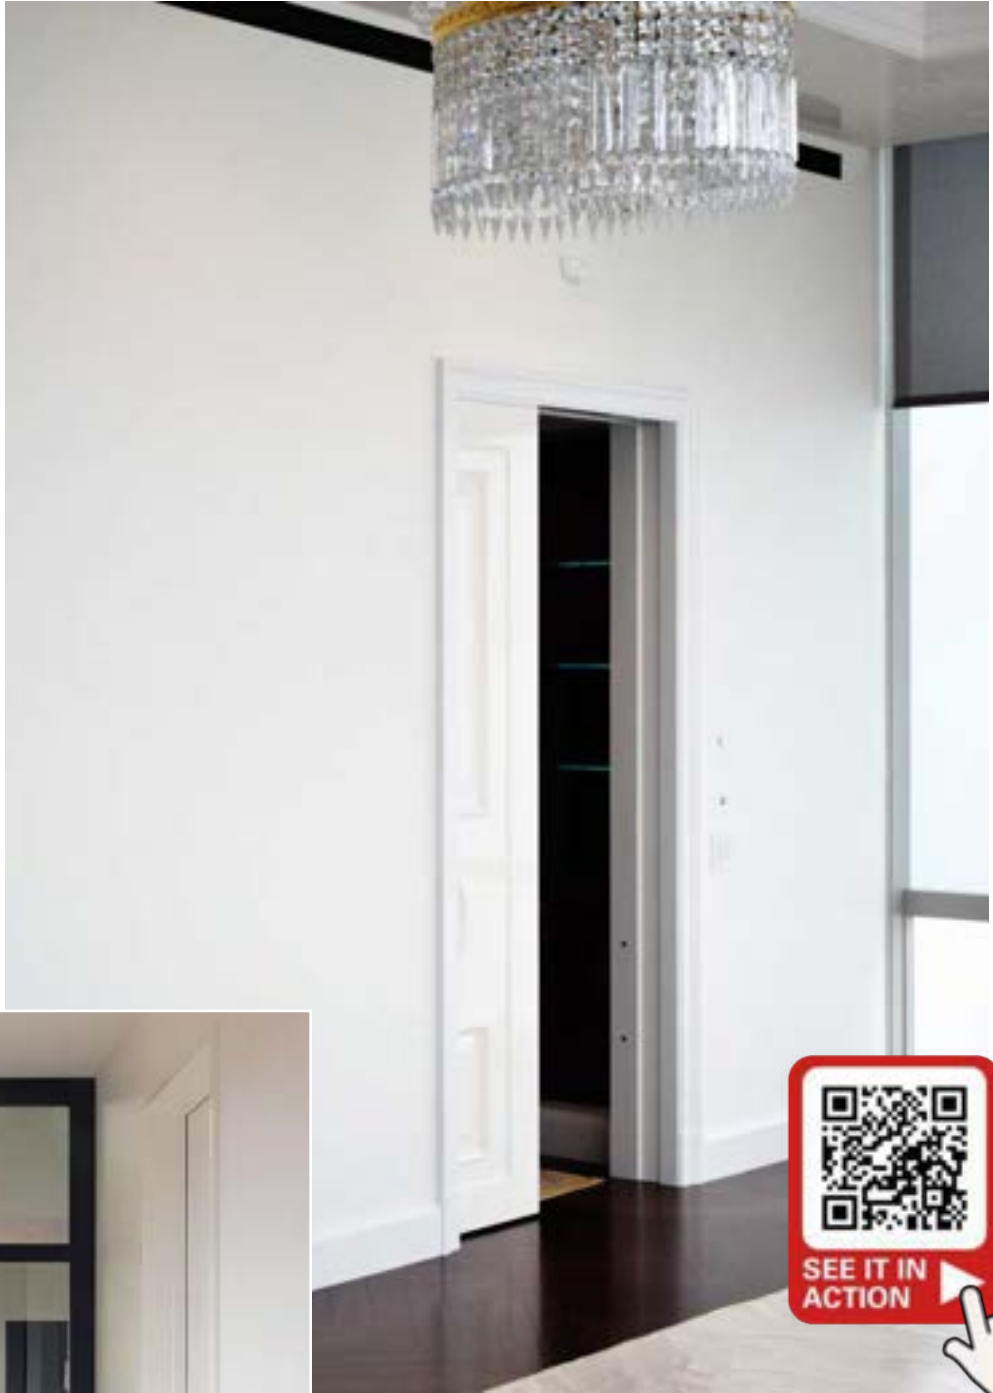

*CS AutoCav Residential pocket door.*



*CS AutoCav Residential with CS NewYorker door.*

High quality components have been designed for all parts of the system. This ensures reduced servicing intervals and product longevity.

 AutomaticUnits

## Features

- Heavy duty, one piece extruded aluminium track.
- Carriages with nylon wheels and enclosed bearing races for smooth, maintenance-free operation.
- Quality components have been designed for all parts of the system, ensuring reduced servicing intervals and product longevity.
- Easy setup with simple plug & play design.
- Access points in the head unit ensure access to the track section is always possible.
- No visible floor track.
- Safety beam sensors provide obstacle detection through the opening if required.



## Access Control Options

PDL switches, overhead sensor or hand wave sensors are available.

In the event of power failure, the door can be manually opened.



Standard PDL switches



Handwave sensor




Overhead sensor

## Rough Opening

Useful formulas	Single	Bi-Parting
Rough opening height	Door height + 7-7/8" (200mm)	
Rough opening width	(Door width x2) + 1-3/16" (30mm)	(Door width x4) + 7/16" (10mm)

## Fixing Detail

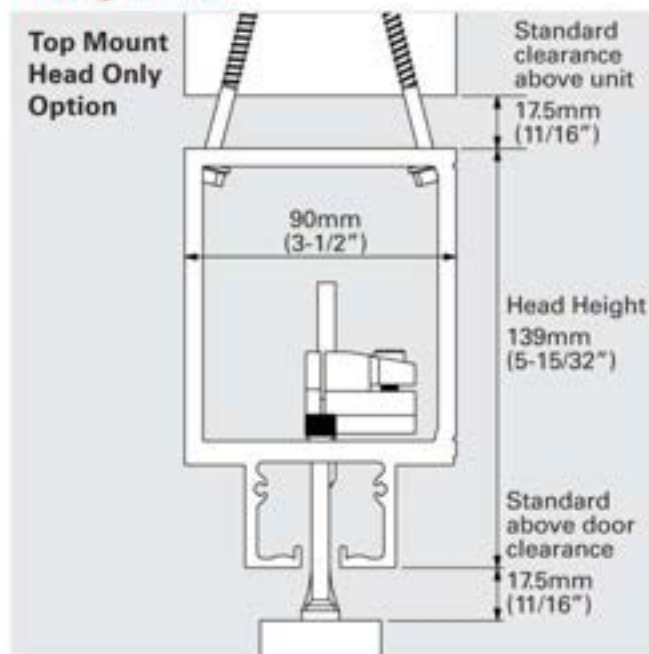


## Suitable Door Types

Can be specified with almost any choice of door that meets a minimum door width of 30" (760mm) and a maximum door width of 60" (1524mm).



Max. Weight  
100kg



Min. Width  
760mm



Plug  
& Play



Safety  
Beams



Speed  
Adjustment

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders™**  
The Pocket Door Experts

# AutoCav™ Selection Chart

Features	Residential	Commercial
3½ or 3⅝" framing (90mm)	✓	✓
5½" framing (140mm)	✓	✓
Maximum door size	60" W x 96" H 1520 x 2440mm	60" W x 108" H 1520 x 2740mm
Maximum door weight - Single	220 lb 100kg	440 lb 200kg
Maximum door weight - Bi-Parting	130 lb 60kg	285 lb 130kg
High security lock		✓
Fire inputs		✓
Security system inputs	✓	✓
Opening speed	16" - 20"/sec 400 - 500 mm/sec	1" - 23"/sec 20 - 600 mm/sec
Closing speed	4" - 20"/sec 100 - 500 mm/sec	1" - 23"/sec 20 - 600 mm/sec
Variable speed		✓
Force to open	✓	✓
Hold open	✓	✓
Partial open		✓
Fault monitoring		✓
Online commissioning		✓
4 inputs	✓	
6 inputs		✓
Home automation integration	✓	✓
UPS/Battery backup		✓
Safety Beams	✓	✓
<b>Activation</b>		
PDL switch	✓	✓
Overhead sensor	✓	✓
Handwave sensor	✓	✓
Multiple activation switches		✓
Configurable multi function button		✓
Secure mode programmable		✓
Wiring for PLC - Customer supplied activation	✓	✓

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

Cavity Sliders USA Inc.

548 Finney Ct  
Gardena  
CA 90248



**CavitySliders™**  
The Pocket Door Experts


CS AUTOCAY™ (O.D. 1986), 61352/US - 05.2022



# Cavity Sliders Sample Options



The Pocket Door Experts

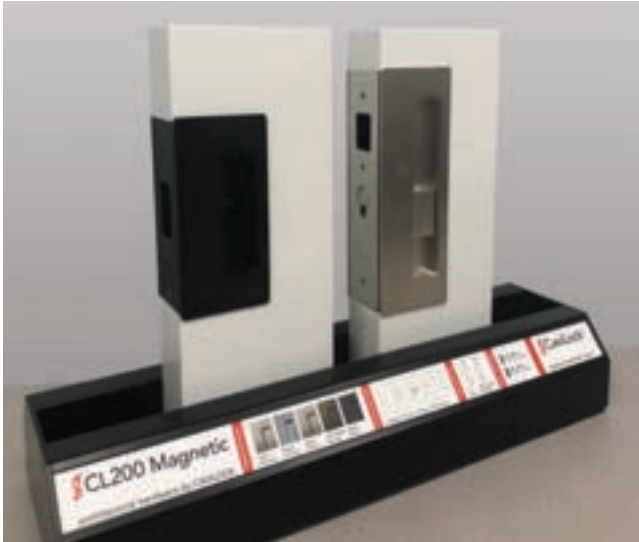

## CL400 Magnetic + CL200 Counter Top Display

### Features

- ▮ Mobile mechanical display
- ▮ CL400 Privacy + CL200 Privacy function

Dimensions:

18" x 12"

Net price:

\$200



## CL400 ADA Magnetic + CL400 Magnetic + CL200 Counter Top Display

### Features

- ▮ Mobile mechanical display
- ▮ CL400 ADA Privacy + CL400 Privacy + CL200 Privacy function

Dimensions:

18" x 12"


Net price:

\$300

# Cavity Sliders Sample Options



The Pocket Door Experts

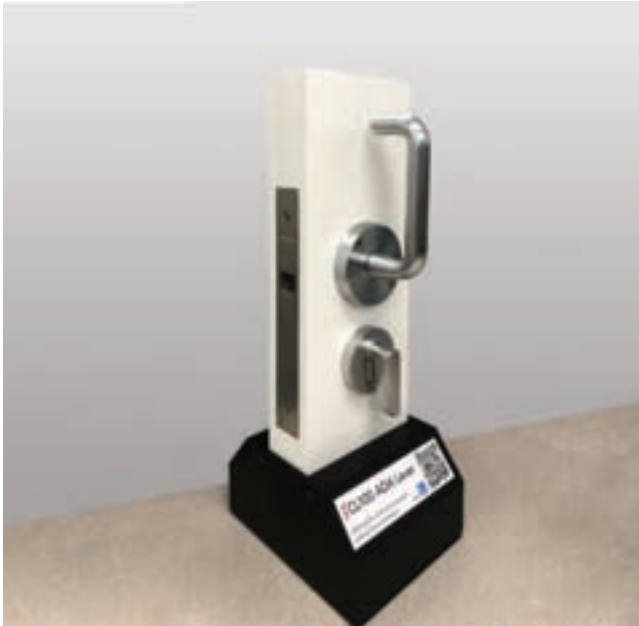

## CL100 ADA Lever Counter Top Display

### Features

- ▮ Mobile mechanical display
- ▮ ADA Turn / Key

Dimensions:

5" x 14"

Net price:

\$100



## CL100 ADA Indicator Lock Counter Top Display

### Features

- ▮ Mobile mechanical display
- ▮ Indicator Lock one side
- ▮ LaviLock one side

Dimensions:

5" x 14"

Net price:

\$100

# Cavity Sliders Sample Options



## CS Cavity Slider™ Pocket Frame

### Features

- Full aluminum structure
- Finishing jambs on one side
- Supplied with M6/M8 carriage and mounting plate

**Dimensions:**

**2' x 2'6"**

**Net price:**

**\$70**

## Full Size Show Room Displays

Please inquire

# Cavity Sliders Sample Options



The Pocket Door Experts



## Track and Mini Frame Sample Kit

### Kit Contents

- CS Cavity Sliders Binder
- Mini CS Cavity Slider Pocket Frame

### 5-1/2" Track Samples

- TopMountTrack Double - 1-3/8"
- FH-Ceiling Mount Track
- CaviTrack
- CaviTrack Sidemount with Fascia

### Standard Components

- M6 Carriage (200 lbs)
- M8 Carriage (500 lbs)
- Mount Plate
- Mount Plate with Stop
- Track Stop
- Wrench

**Container Dimensions: 14.5" x 16.5" x 6"**

**Net price: \$120**



[www.cavitysliders.com](http://www.cavitysliders.com)

High quality  
products designed  
in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248

Another quality product from:

**CavitySliders™**  
The Pocket Door Experts

## Door Groove Cutter

The router cutter that we use on our own doors is now available for your use. This cutter is custom made to cut a groove slot that suits the CS range of T-Guides.




### Features

- Custom made to suit the CS range of T-Guides
- Cut accurate grooves - quickly and easily

**Note:** Groove cut dimensions should be checked regularly to make sure cut is to spec. If not, cutters will need to be retipped.

### Dimensions

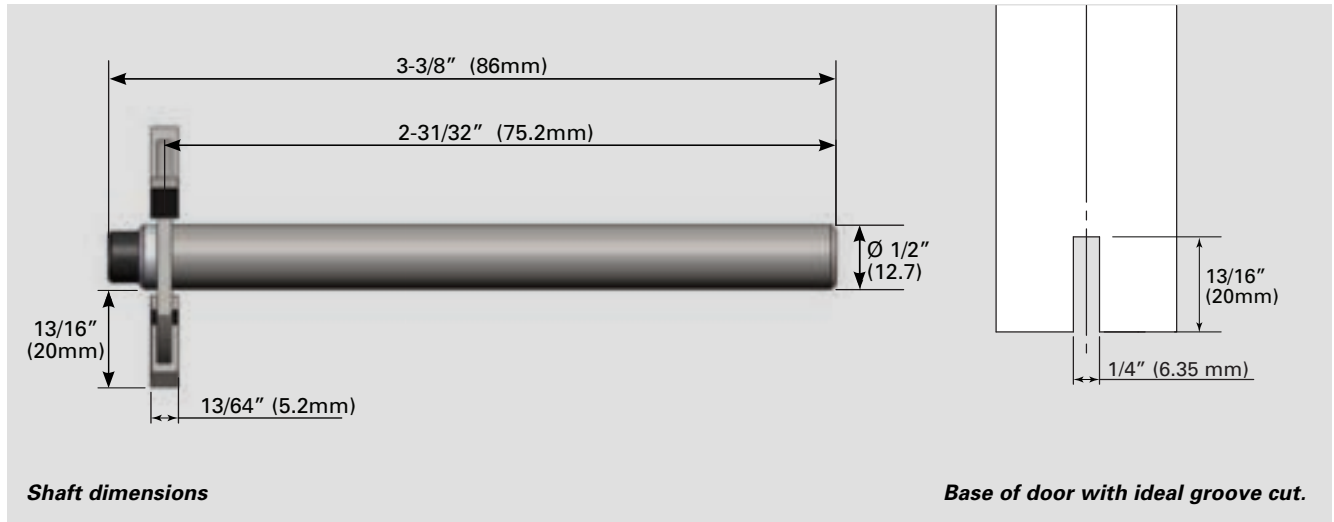

**ZMU003    List price: \$ 119.00**

# CL400 Magnetic Cutout Jigs


## CL400 Magnetic Handle Cutout Jig

This jig is made from quality materials that will last a lifetime. It allows for accurate and consistent cutting of the handle recess for the CL400 Magnetic.



### Contents

1. Handle Cutout Jig
2. 1/2" Guide Bush
3. Wavy Washer
4. Universal Nut
5. 1/2 inch Solid Carbide Spiral Cutter
6. 1/2" Alignment Pin
7. Instructions

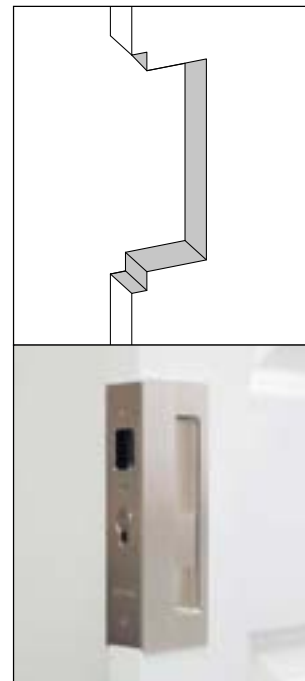

**CL400T0000**

**List price: \$ 350**

## CL400 Magnetic Striker Cutout Jig


This jig is made from quality materials that will last a lifetime. It allows for quick, accurate mounting of the CL400 Striker in any wooden closing jamb.



**Note:** The striker jig can be used only on wooden jambs and will leave 3 small screw holes which will need to be filled.

### Contents

1. Main Striker Jig
2. Striker Jig Insert
3. Screws
4. 1/4" Alignment Pin
5. 1/4" Solid Carbide Spiral Cutter
6. 1/4" Guide Bush
7. Universal Nut
8. Wavy Washer
9. Instructions

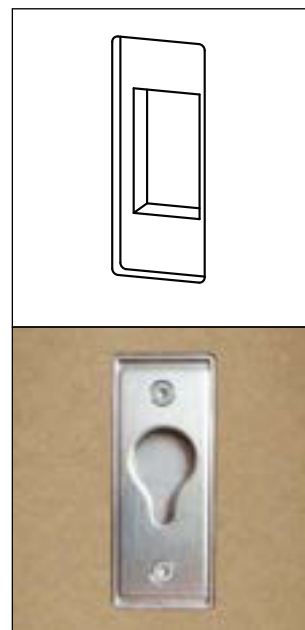

**CL400T0003**

**List price: \$ 250**



# CavitySliders

Quality Sliding Door Hardware

## Carbide Spiral Cutters

---

### 1/2 inch Solid Carbide Spiral Cutter for Handle Cutout Jig



Up-cut two flute **Solid Carbide** spiral cutter, 1/2" shank x 1/2" cut diameter x 2" cut length to be used with Handle Cutout Jig. This solid carbide spiral cutter has been chosen to do the best job possible and is recommended.

**CL400TA015**  
**List price: \$110 each**

---

### 1/4 inch Solid Carbide Spiral Cutter for Striker Cutout Jig



Up-cut two flute **Solid Carbide** spiral cutter, 1/4" shank x 1/4" cut diameter x 1 1/4" cut length to be used with Striker Cutout Jig. This solid carbide spiral cutter has been chosen to do the best job possible and is recommended.

**CL400TA029**  
**List price: \$65 each**





Multiplier:



The Pocket Door Experts

# Product Codes














Prices valid from 1/1/2022



[www.cavitysliders.com](http://www.cavitysliders.com)


# CS Cavity Slider Pocket Frame - List Pricing

## Select Frame & Carriage Pack

Item	Description	Model	Code
	CS Cavity Slider Pocket Frame only	3068 (3'0" x 6'8")	CSS4K3068
		3080 (3'0" x 8'0")	CSS4K3080
		4080 (4'0" x 8'0")	CSS4K4080
	M6 (200lb) with no track stops		DKM0601
	M6 (200lb) with 1 track stop		DKM0611
	M8 (500lb) with no track stops		DKM0801
	M8 (500lb) with 1 track stop		DKM0811
	Sofstop Single Action (176 lb) with no track stops		DKS0301
	Sofstop Single Action (176 lb) with 1 track stop		DKS0311
	Sofstop Single Action (264 lb) with no track stops		DKS0401
	Sofstop Single Action (264 lb) with 1 track stop		DKS0411
	Sofstop Twin Double Action (176 lb) with no track stops		DKS0601
	Sofstop Twin Double Action (176 lb) with 1 track stop		DKS0611

## SofStop Minimum Door Widths

SofStop® Single	No Track Stop	1 Track Stop
 <b>0 - 176 lb</b> 80kg	25" (635mm)	28" (711mm)
 <b>176 - 264 lb</b> 120kg	28" (711mm)	31" (787mm)

SofStop® Twin	No Track Stop	1 Track Stop
 <b>0 - 176 lb</b> 80kg	33" (840mm)	36" (914mm)

# CS Track Systems - List Pricing

Tracks are available in popular pre-cut lengths or can be cut to custom lengths between 6 and 24ft (to the nearest foot). A per foot rate applies to custom lengths, which includes cutting fee.

Item	Description	Length	Code
	CS CaviTrack - Single	6ft	CT6
		8ft	CT8
		12ft	CT12
		24ft	CT24
		Custom	CTNSS
	CS CaviTrack Fascia Clear Anodized Suits 1-3/8" or 1-3/4" door	6ft	FNA-6
		8ft	FNA-8
		12ft	FNA-12
		24ft	FNA-24
		Custom	FNA-NSS
	CS CaviTrack Fascia Bronze Anodized Suits 1-3/8" or 1-3/4" door	6ft	FBA-6
		8ft	FBA-8
		12ft	FBA-12
		24ft	FBA-24
		Custom	FBA-NSS
	CS CaviTrack End Cap - Fascia One Side	Clear Anodized	ZK00427
	CS CaviTrack End Cap - Fascia One Side	Bronze Anodized	ZK00430
	CS CaviTrack End Cap - Fascia Both Sides	Clear Anodized	ZK00428
	CS CaviTrack End Cap - Fascia Both Sides	Bronze Anodized	ZK00429
	CS Top Mount Track - Double 1-3/8" door thickness	6ft	TSTM2-138-6
		8ft	TSTM2-138-8
		12ft	TSTM2-138-12
		24ft	TSTM2-138-24
		Custom	TSTM2-138-NSS
	CS Top Mount Track - Double 1-3/4" door thickness	6ft	TSTM2-134-6
		8ft	TSTM2-134-8
		12ft	TSTM2-134-12
		24ft	TSTM2-134-24
		Custom	TSTM2-134-NSS
	CS Top Mount Track - Triple 1-3/8" door thickness	6ft	TSTM3-138-6
		8ft	TSTM3-138-8
		12ft	TSTM3-138-12
		24ft	TSTM3-138-24
		Custom	TSTM3-138-NSS
	CS Top Mount Track - Triple 1-3/4" door thickness	6ft	TSTM3-134-6
		8ft	TSTM3-134-8
		12ft	TSTM3-134-12
		24ft	TSTM3-134-24
		Custom	TSTM3-134-NSS

Additional freight charges and longer lead times will apply to stock not held in inventory. Prices valid from 1/1/2022.  
Prices are subject to change without notice. Colors shown may not accurately represent product.

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/3 1/2022

## CS Track Systems - List Pricing

Tracks are available in popular pre-cut lengths or can be cut to custom lengths between 6 and 24ft (to the nearest foot). A per foot rate applies to custom lengths, which includes cutting fee.

Item	Description	Length	Code
	CS FH-Ceiling Mount Track - Single	6ft	TSFH1-6
		8ft	TSFH1-8
		12ft	TSFH1-12
		24ft	TSFH1-24
		Custom	TSFH1-NSS
	CS FH-Ceiling Mount Track - Double 1-3/8" door thickness	6ft	TSFH2-138-6
		8ft	TSFH2-138-8
		12ft	TSFH2-138-12
		24ft	TSFH2-138-24
		Custom	TSFH2-138-NSS
	CS FH-Ceiling Mount Track - Double 1-3/4" door thickness	6ft	TSFH2-134-6
		8ft	TSFH2-134-8
		12ft	TSFH2-134-12
		24ft	TSFH2-134-24
		Custom	TSFH2-134-NSS
	CS FH-Ceiling Mount Track - Triple 1-3/8" door thickness	6ft	TSFH3-138-6
		8ft	TSFH3-138-8
		12ft	TSFH3-138-12
		24ft	TSFH3-138-24
		Custom	TSFH3-138-NSS
	CS FH-Ceiling Mount Track - Triple 1-3/4" door thickness	6ft	TSFH3-134-6
		8ft	TSFH3-134-8
		12ft	TSFH3-134-12
		24ft	TSFH3-134-24
		Custom	TSFH3-134-NSS
	CS Heavy Duty Track - Single	Custom	TSHDT1NA0NSS
	CS Frameless Glass Clamp 3/8" glass thickness	2ft	FGCTM1NA0020-38
		3ft	FGCTM1NA0030-38
		4ft	FGCTM1NA0040-38
		5ft	FGCTM1NA0050-38
		6ft	FGCTM1NA0060-38
	CS Frameless Glass Clamp 1/2" glass thickness	2ft	FGCTM1NA0020-12
		3ft	FGCTM1NA0030-12
		4ft	FGCTM1NA0040-12
		5ft	FGCTM1NA0050-12
		6ft	FGCTM1NA0060-12
Cut down charge for CS Frameless Glass Clamp			
	CS Frameless Glass U-Guide Suits 3/8" & 1/2" glass		FGUG

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/4 1/2022

# CS Barn Track Systems - List Pricing

Item	Description	Length	Code
	CS WallMount Track Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Natural (Clear) Anodized	6ft	TSWMNA-6
		8ft	TSWMNA-8
		12ft	TSWMNA-12
		24ft	TSWMNA-24
		Custom	TSWMNA-NSS
	CS WallMount Track Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Bronze Anodized	6ft	TSWMBA-6
		8ft	TSWMBA-8
		12ft	TSWMBA-12
		24ft	TSWMBA-24
		Custom	TSWMBA-NSS
	CS WallMount Track (Carriage Section only)	Custom	ZA00244
	CS CaviTrack Side Mount Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Natural (Clear) Anodized	6ft	TSCTSMNA-6
		8ft	TSCTSMNA-8
		12ft	TSCTSMNA-12
		24ft	TSCTSMNA-24
		Custom	TSCTSMNA-NSS
	CS CaviTrack Side Mount Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Bronze Anodized	6ft	TSCTSMBA-6
		8ft	TSCTSMBA-8
		12ft	TSCTSMBA-12
		24ft	TSCTSMBA-24
		Custom	TSCTSMBA-NSS
	CS CaviTrack Side Mount (Carriage Section only)	Custom	ZA00351
	Barn Door Track Pack (Includes track, fixing bracket and screw pack) <b>Narrow</b>	6ft	TSBS1830N
		7ft	TSBS2135N
		8ft	TSBS2440N
		9ft	TSBS2745N
		10ft	TSBS3050N
		12ft	TSBS3660N
	Barn Door Track Pack (Includes track, fixing bracket and screw pack) <b>Wide</b>	6ft	TSBS1830W
		7ft	TSBS2135W
		8ft	TSBS2440W
		9ft	TSBS2745W
		10ft	TSBS3050W
		12ft	TSBS3660W
		13ft	TSBS3962W
		14ft	TSBS4267W
		15ft	TSBS4572W
		16ft	TSBS4877W
		17ft	TSBS5182W
		18ft	TSBS5486W
		19ft	TSBS5791W

Additional freight charges and longer lead times will apply to stock not held in inventory. Prices valid from 1/1/2022.  
 Prices are subject to change without notice. Colors shown may not accurately represent product.

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/5 1/2022

# Carriage Packs - List Pricing

Suitable for use with:







CS Cavity Slider

CS CaviTrack



CS Top Mount Track (Double/Triple)

CS FH-Ceiling Mount Track (Single/Double/Triple)

CS WallMount Track










Item	Description	Code
	M6 (200lb) with no track stops	DKM0601
	M6 (200lb) with 1 track stop	DKM0611
	M6 (200lb) with 2 track stops	DKM0621
	M8 (500lb) with no track stops	DKM0801
	M8 (500lb) with 1 track stop	DKM0811
	M8 (500lb) with 2 track stops	DKM0821

Suitable for use with: CS Barn Door Track




Item	Description	Code
	CS Barn Door Hangers & Stops Pack	TSBS001
	SofStop (264 lb) Single Pack for Barn Door Track	TSBS100

# Carriage Packs - List Pricing




Suitable for use with CS Cavity Slider, CaviTrack, Full-Height Track, WallMount Track

Item	Description	Code
	Sofstop Single Action 0 - 176 lb with no track stops	DKS0301
	Sofstop Single Action 0 - 176 lb with 1 track stop	DKS0311
	Sofstop Single Action 0 - 176 lb with 2 track stops	DKS0321
	Sofstop Single Action 176 - 264 lb with no track stops	DKS0401
	Sofstop Single Action 176 - 264 lb with 1 track stop	DKS0411
	Sofstop Single Action 176 - 264 lb with 2 track stops	DKS0421
	Sofstop Twin Double Action 0 - 176 lb with no track stops	DKS0601
	Sofstop Twin Double Action 0 - 176 lb with 1 track stop	DKS0611
	Sofstop Twin Double Action 0 - 176 lb with 2 track stops	DKS0621

## SofStop Minimum Door Widths

SofStop® Single	No Track Stop	1 Track Stop	2 Track Stops	SofStop® Twin	No Track Stop	1 Track Stop	2 Track Stops
 <b>0 - 176 lb</b> 80kg	25" (635mm)	28" (711mm)	30" (762mm)	 <b>0 - 176 lb</b> 80kg	33" (840mm)	36" (914mm)	39" (990mm)
 <b>176 - 264 lb</b> 120kg	28" (711mm)	31" (787mm)	33" (838mm)				

Suitable for use with CS Heavy Duty Track

Item	Description	Code
	M10 (1100lb) with no track stops	DKM1000
	M10 (1100lb) with 1 track stop	DKM1010
	M10 (1100lb) with 2 track stops	DKM1020

Additional freight charges and longer lead times will apply to stock not held in inventory. Prices valid from 1/1/2022. Prices are subject to change without notice. Colors shown may not accurately represent product.

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/7 1/2022

## Collection Packs - List Pricing




Suitable for use with:

CS Top Mount Track (Double/Triple)

CS FH-Ceiling Mount Track (Double/Triple)

Item	Description	Code
	2 Door M6 (200lb) 1 3/8" Collection Pack	DKO6201
	2 Door M6 (200lb) 1 3/4" Collection Pack	DKO6221
	3 Door M6 (200lb) 1 3/8" Collection Pack	DKO6301
	3 Door M6 (200lb) 1 3/4" Collection Pack	DKO6321
	2 Door M8 (500lb) 1 3/8" Collection Pack	DKO8201
	2 Door M8 (500lb) 1 3/4" Collection Pack	DKO8221
	3 Door M8 (500lb) 1 3/8" Collection Pack	DKO8301
	3 Door M8 (500lb) 1 3/4" Collection Pack	DKO8321

## Floor Channel & Bearing Guide System - List Pricing

Item	Description	Code	
	Single Stainless Steel Ball Bearing Roller Guide	ZK00384	
	Double Stainless Steel Ball Bearing Roller Guide	ZK00385	
Item	Description	Length	Code
	Aluminum bronze anodized floor channel with PVC insert	6 foot	ZK00386
		8 foot	ZK00387
		12 foot	ZK00388
		24 foot	ZK00389






## Components - List Pricing

Item	Description	Code
	M6 Carriage (200lb per pair)	ZK00345
	M8 Carriage (500lb per pair)	ZK00344
	M6/M8 Mounting Plate	ZK00095
	M6/M8 Mounting Plate with Stop	ZK00096
	Track Stop	ZK00377
	M6/M8 Adjusting Wrench	ZM00008
	Extra Long M6 Hanger Pin	ZK00135
	Extra Long M8 Hanger Pin	ZK00138
	Joining Pin (For use with the Cavity Slider Pocket Frame, TopMountTrack, and FH-Ceiling Mount Track)	ZK00305
	Joining Pin For use with CaviTrack, CS WallMount Track, and CS SideMount Track)	ZK00439
	Extra Tall 50mm (2") T-Guide Kit	ZK00067
	Black Plastic T Guide 23mm (7/8") Kit	ZK00069
	T-Guide Base (CS Cavity Slider Pocket Frame)	ZK00322
	Door GuideT 30mm (1-3/16") (CS Cavity Slider Pocket Frame)	ZK00328
	Door GuideT 50mm (2") (CS Cavity Slider Pocket Frame)	ZK00331
	SofStop Activator	ZK00327
	SofStop Single Action Mechanism with Jockey Wheel Only - 0-176 lb	ZK00407
	SofStop Single Action Mechanism with Jockey Wheel Only - 176-264 lb	ZK00408
	SofStop Twin Double Action Mechanism with Jockey Wheel Only - 0-176 lb	ZK00409

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/10 1/2022





## Additional Components - List Pricing

### M10 (1100lb) Components




Item	Description	Code
	M10 Carriage (1100lb per pair)	ZK00128
	M10 Mounting Plate	ZK00129
	M10 Mounting Plate with Stop	ZK00130
	M10 Track Stop Aluminum	ZK00308
	M10 Adjusting Wrench	ZM00009

## Stainless Steel Components - List Pricing

### M8 (500lb) Components

Item	Description	Code
	M8 Carriage Stainless Steel (500lb per pair)	ZK00111
	M8 Mounting Plate Stainless Steel	ZK00112
	M8 Mounting Plate with Stop Stainless Steel	ZK00113
	M8 Track Stop Aluminum	ZK00377

### M10 (1100lb) Components


Item	Description	Code
	M10 Carriage Stainless Steel (1100lb per pair)	ZK00145
	M10 Mounting Plate Stainless Steel	ZK00147
	M10 Mounting Plate with Track Stop Stainless Steel	ZK00148

Additional freight charges and longer lead times will apply to stock not held in inventory. Prices valid from 1/1/2022.  
Prices are subject to change without notice. Colors shown may not accurately represent product.

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/10 1/2022





# CL400 Magnetic Passage/Privacy - List Pricing

**Selection Procedure** To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration		
Single Door	Bright Chrome	34 - 40 mm	Handing must be determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.		
Bi-Parting Door	Satin Chrome	1-3/8" to 1-9/16"			
		40 - 46 mm			
Passage (Non Latching)	Oil Rubbed Bronze	1-5/8" to 1-3/4"			
Passage (Mag Latching)	Satin Nickel	46 - 52 mm			
Privacy Locking	Matte Black	1-13/16" to 2"	<b>LH</b>	<b>RH</b>	Stand looking into the pocket as shown 
Key Locking		52 - 57 mm	Blank	Blank	
		2" to 2-1/4"	Snib	Snib	
			Key	Key	
			Emerg.	Emerg.	


**Pricing below covers popular SKUs.**

For other finishes, door thicknesses or configurations, inquire for pricing and availability.

Function	Finish	Door Thickness		
		1-3/8"	1-3/4"	
PASSAGE				
Blank/Blank (Non-latching) <div>NON - MAGNETIC</div>		Bright Chrome	CL400A0025	CL400A0026
		Satin Chrome	CL400A0125	CL400A0126
		ORB	CL400A0225	CL400A0226
		Satin Nickel	CL400A0325	CL400A0326
		Matte Black	CL400A0425	CL400A0426
Blank/Blank (Magnetic latching)		Bright Chrome	CL400A0028	CL400A0029
		Satin Chrome	CL400A0128	CL400A0129
		ORB	CL400A0228	CL400A0229
		Satin Nickel	CL400A0328	CL400A0329
		Matte Black	CL400A0428	CL400A0429
PRIVACY				
LH Emerg/Snib RH		Bright Chrome	CL400B0028	CL400B0033
		Satin Chrome	CL400B0128	CL400B0133
		ORB	CL400B0228	CL400B0233
		Satin Nickel	CL400B0328	CL400B0333
		Matte Black	CL400B0428	CL400B0433
LH Snib/Emerg RH		Bright Chrome	CL400B0029	CL400B0034
		Satin Chrome	CL400B0129	CL400B0134
		ORB	CL400B0229	CL400B0234
		Satin Nickel	CL400B0329	CL400B0334
		Matte Black	CL400B0429	CL400B0434

# CL400 Magnetic Key Locking - List Pricing

**Selection Procedure** To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration		
Single Door	Bright Chrome	34 - 40 mm	Handing must be determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.		
Bi-Parting Door	Satin Chrome	1-3/8" to 1-9/16"			
Passage (Non Latching)	Oil Rubbed Bronze	40 - 46 mm			
Passage (Mag Latching)	Satin Nickel	1-5/8" to 1-3/4"			
Privacy Locking	Matte Black	46 - 52 mm			
Key Locking		1-13/16" to 2"	LH	RH	Stand looking into the pocket as shown 
		52 - 57 mm	Blank	Blank	
		2" to 2-1/4"	Snib	Snib	
			Key	Key	
			Emerg.	Emerg.	

**Pricing below covers popular SKUs.**


For other finishes, door thicknesses or configurations, inquire for pricing and availability.

Function	Finish	Door Thickness	
		1-3/8"	1-3/4"
KEY LOCKING			
LH Snib/Key RH	Bright Chrome	CL400C0027	CL400C0037
	Satin Chrome	CL400C0127	CL400C0137
	ORB	CL400C0227	CL400C0237
	Satin Nickel	CL400C0327	CL400C0337
	Matte Black	CL400C0427	CL400C0437
LH Key/Snib RH	Bright Chrome	CL400C0028	CL400C0038
	Satin Chrome	CL400C0128	CL400C0138
	ORB	CL400C0228	CL400C0238
	Satin Nickel	CL400C0328	CL400C0338
	Matte Black	CL400C0428	CL400C0438
Key/Key	Bright Chrome	CL400C0029	CL400C0039
	Satin Chrome	CL400C0129	CL400C0139
	ORB	CL400C0229	CL400C0239
	Satin Nickel	CL400C0329	CL400C0339
	Matte Black	CL400C0429	CL400C0439

# CL400 Magnetic Bi-Parting - List Pricing

**Selection Procedure** To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration
Bi-Parting Passage (Non Latching)	Bright Chrome	34 - 40 mm	Bi-Parting Privacy Snib One Side and Key One Side handles are supplied with the Snib or Key on the right hand side only.
	Satin Chrome	1-3/8" to 1-9/16"	
Bi-Parting Passage (Mag Latching)	Oil Rubbed Bronze	40 - 46 mm	Snib both sides Snib one side Snib/Emergency Key both sides Key one side
	Satin Nickel	1-5/8" to 1-3/4"	
Bi-Parting Privacy	Matte Black	46 - 52 mm	
Bi-Parting Key Locking		1-13/16" to 2"	
		52 - 57 mm	
		2" to 2-1/4"	



**Pricing below covers popular SKUs.**

For other finishes, door thicknesses or configurations, inquire for pricing and availability.


Function	Finish	Door Thickness	
		1-3/8"	1-3/4"
Passage (Non-latching)  <b>NON MAGNETIC</b>	Bright Chrome	CL400D0025	CL400D0026
	Satin Chrome	CL400D0125	CL400D0126
	ORB	CL400D0225	CL400D0226
	Satin Nickel	CL400D0325	CL400D0326
	Matte Black	CL400D0425	CL400D0426
Passage (Magnetic latching)	Bright Chrome	CL400D0028	CL400D0029
	Satin Chrome	CL400D0128	CL400D0129
	ORB	CL400D0228	CL400D0229
	Satin Nickel	CL400D0328	CL400D0329
	Matte Black	CL400D0428	CL400D0429
Privacy Emerg/Snib	Bright Chrome	CL400D0038	CL400D0043
	Satin Chrome	CL400D0138	CL400D0143
	ORB	CL400D0238	CL400D0243
	Satin Nickel	CL400D0338	CL400D0343
	Matte Black	CL400D0438	CL400D0443
Snib/Key	Bright Chrome	CL400D0052	CL400D0062
	Satin Chrome	CL400D0152	CL400D0162
	ORB	CL400D0252	CL400D0262
	Satin Nickel	CL400D0352	CL400D0362
	Matte Black	CL400D0452	CL400D0462
Key/Key	Bright Chrome	CL400D0055	CL400D0065
	Satin Chrome	CL400D0155	CL400D0165
	ORB	CL400D0255	CL400D0265
	Satin Nickel	CL400D0355	CL400D0365
	Matte Black	CL400D0455	CL400D0465

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/13 1/2022

# CL400 ADA Magnetic Passage/Privacy - List Pricing





**Selection Procedure** To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration
Single Door	Bright Chrome	34 - 40 mm	Handing must be determined at time of manufacture and cannot be altered on site. Careful selection of handing options is required at time of order. See diagram for determining handing of functions.
Bi-Parting Door	Satin Chrome	1-3/8" to 1-9/16"	
Passage (Non Latching)	Oil Rubbed Bronze	40 - 46 mm	
Passage (Mag Latching)	Satin Nickel	1-5/8" to 1-3/4"	
Privacy Locking		46 - 52 mm	
		1-13/16" to 2"	<div> <div>LH</div> <div>RH</div> </div> <div> <div>Blank</div> <div>Blank</div> </div> <div> <div>Snib</div> <div>Snib</div> </div> <div> <div>Emerg.</div> <div>Emerg.</div> </div>
		52 - 57 mm	
		2" to 2-1/4"	



**Pricing below covers popular SKUs.**

For other finishes, door thicknesses or configurations, inquire for pricing and availability.


Function	Finish	Door Thickness		
		1-3/8"	1-3/4"	
PASSAGE				
Blank/Blank (Non-latching)  <b>NON - MAGNETIC</b>		Bright Chrome	CL406A0025	CL406A0026
		Satin Chrome	CL406A0125	CL406A0126
		ORB	CL406A0225	CL406A0226
		Satin Nickel	CL406A0325	CL406A0326
Blank/Blank (Magnetic latching)		Bright Chrome	CL406A0028	CL406A0029
		Satin Chrome	CL406A0128	CL406A0129
		ORB	CL406A0228	CL406A0229
		Satin Nickel	CL406A0328	CL406A0329
PRIVACY				
LH Emerg/Snib RH		Bright Chrome	CL406B0028	CL406B0033
		Satin Chrome	CL406B0128	CL406B0133
		ORB	CL406B0228	CL406B0233
		Satin Nickel	CL406B0328	CL406B0333
LH Snib/Emerg RH		Bright Chrome	CL406B0029	CL406B0034
		Satin Chrome	CL406B0129	CL406B0134
		ORB	CL406B0229	CL406B0234
		Satin Nickel	CL406B0329	CL406B0334

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/14 1/2022

# CL400 ADA Magnetic Bi-Parting - List Pricing



**Selection Procedure** To order, ensure you have the following information ready:

Function	Finish	Door thickness	Handing Configuration
Bi-Parting Passage (Non Latching)	Bright Chrome	34 - 40 mm	Bi-Parting Privacy Snib One Side handles are supplied with the Snib on the right hand side only.
	Satin Chrome	1-3/8" to 1-9/16"	
Bi-Parting Passage (Mag Latching)	Oil Rubbed Bronze	40 - 46 mm	Snib both sides Snib one side Snib/Emergency
	Satin Nickel	1-5/8" to 1-3/4"	
Bi-Parting Privacy		1-13/16" to 2"	
		52 - 57 mm	
		2" to 2-1/4"	





**Pricing below covers popular SKUs.**

For other finishes, door thicknesses or configurations, inquire for pricing and availability.

Function	Finish	Door Thickness	
		1-3/8"	1-3/4"
Passage (Magnetic latching) 	Bright Chrome	CL406D0028	CL406D0029
	Satin Chrome	CL406D0128	CL406D0129
	ORB	CL406D0228	CL406D0229
	Satin Nickel	CL406D0328	CL406D0329
Privacy Emerg/ Snib 	Bright Chrome	CL406D0038	CL406D0043
	Satin Chrome	CL406D0138	CL406D0143
	ORB	CL406D0238	CL406D0243
	Satin Nickel	CL406D0338	CL406D0343

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/15 1/2022

# CaviLock Barn Door Strike List Pricing

CL400 / CL400 ADA			
Item	Description	Finish	Code
	CL400 Barn Door Strike	Bright Chrome	CL400SA0025
		Satin Chrome	CL400SA0125
		Oil Rubbed Bronze	CL400SA0225
		Satin Nickel	CL400SA0325
		Matte Black	CL400SA0425
		Paint Primed White	CL400SA0725
	Right Angle Bracket	Bright Chrome	CL400BA0025
		Satin Chrome	CL400BA0125
		Oil Rubbed Bronze	CL400BA0225
		Satin Nickel	CL400BA0325
		Matte Black	CL400BA0425
		Paint Primed White	CL400BA0725


All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/16 1/2022


# CL200 List Pricing

## How to Order:


1. Select the functionality and snib type.
2. Select the finish.
3. Select the door thickness.

**For example:** If you require a CL200 Privacy Snib/Emergency in Oil Rubbed Bronze for a door thickness of 1-3/8" the code will be **CL205D0006**

PASSAGE - A			
Blank/Blank 	Finish	1-3/8" Door	1-3/4" Door
	Bright Chrome	CL205A0000	CL205A0015
	Satin Chrome	CL205A0001	CL205A0016
	ORB	CL205A0002	CL205A0017
	Satin Nickel	CL205A0003	CL205A0018
	Matte Black	CL205A0006	CL205A0021

PRIVACY - D (NOT HANDED)			
Snib/ Emergency 	Finish	1-3/8" Door	1-3/4" Door
	Bright Chrome	CL205D0000	CL205D0030
	Satin Chrome	CL205D0003	CL205D0033
	ORB	CL205D0006	CL205D0036
	Satin Nickel	CL205D0009	CL205D0039
	Matte Black	CL205D0018	CL205D0048

**Bi-Parting handles are ordered as two separate items.** Choose a privacy handle above then add a Bi-Parting mate with striker below. For Bi-Parting Passage handles, order 2x single passage handles above.

BI-PARTING MATE - C (to latch with Privacy)			
Blank/Blank (with latching face plate) 	Finish	1-3/8" Door	1-3/4" Door
	Bright Chrome	CL205C0000	CL205C0015
	Satin Chrome	CL205C0001	CL205C0016
	ORB	CL205C0002	CL205C0017
	Satin Nickel	CL205C0003	CL205C0018
	Matte Black	CL205C0006	CL205C0021

**Bi-Parting (Double Doors):**  
Passage with striker (C) + Privacy (D)



CL205D0009 + CL205C0003

# CL100 List Pricing

Type	Satin Chrome	Cylinder	
CL100 Flush Turn - Key/Key (not handed)	CL100A1004		
CL100 Flush Turn - Key One Side (not handed)	CL100A1006		
CL100 Flush Turn Only	CL100A9004		
CL100 Lever - Key/Key (not handed)	CL100A7054		
CL100 Lever - Key/Turn (not handed)	CL100A7058		
CL100 Lever - Key One Side (not handed)	CL100A7056		
CL100 Lever - Turn/Emergency (not handed)	CL100A7014		
CL100 Lever Only	CL100B5002		
CL100 ADA Lever - Turn / Key (not handed)	CL100A7018		
CL100 ADA Lever - Turn / Emergency (not handed)	CL100A7020		
CL100 ADA LaviLock - Left Hand	CL100B3010		
CL100 ADA LaviLock - Right Hand	CL100B3008		
CL100 ADA Indicator Lock - Left Hand	CL100B3016		
CL100 ADA Indicator Lock - Right Hand	CL100B3015		
Type	Satin Chrome	Oil Rubbed Bronze	
Louey Side Handle	CL100I3000	CL100I3005	
Timber Edge Pull	CL800A4020	CL800A4021	

All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. Drawings & pictures are not to scale. All dimensions in inches (and mm). 60945/18 1/2022

Additional freight charges and longer lead times will apply to stock not held in inventory. Prices valid from 1/1/2022. Prices are subject to change without notice. Colors shown may not accurately represent product.

## Warranty Conditions

Cavity Sliders USA Incorporated

The Pocket Door Experts

### Valued Customer,

On behalf of the whole CS team, we would like to thank you for purchasing our products. Since our establishment in 1986, we have strived to reach levels of optimal performance in both manufacturing and customer service. Cavity Sliders USA Inc. is dedicated to providing products that meet the needs of our customers. We constantly monitor the marketplace and are innovators in our field. New products are under constant development, so that as your needs change, we are right there with you.

### IMPORTANT:

Please ensure that this documentation is received by the end customer.

We trust you are enjoying the many benefits of our products. Should you have any inquiries or comments, please feel confident in calling one of our friendly customer services staff.

Regards



Phil Kenny  
President, Cavity Sliders USA Inc.

The warranties herein form part of the TERMS OF TRADE FOR GOODS AND SERVICES and the general conditions of Warranty are also contained in that contract.

**The Company's maximum liability hereunder is limited to the purchase price of the Goods. In no event shall the Company be liable for any consequential, indirect, incidental or special and/or punitive damages of any nature arising from the sale or use of the Goods, whether based on contract, warranty, tort, strict liability, patent infringement, or otherwise, even if advised of the possibility of such damages.**

### Note:

- This warranty only applies to the original user of the Goods. This warranty is not transferable.
- This warranty is limited to the repair or replacement of faulty parts only. The costs of removal and reinstallation of Goods and/or shipping and freight are excluded.
- This warranty excludes normal wear and tear or Goods used in extremely high use situations where the manufacturer has not been consulted regarding the suitability of the Goods.
- The warranty on Goods supplied by the Company but not manufactured by the Company shall be the warranty of the original manufacturer.
- Finish Warranty - finishes susceptible to early deterioration or oxidation (often referred to as living finishes, e.g. Oil Rubbed Bronze) are excluded from this warranty.


### 1. Goods supplied but not manufactured by the Company

The warranty on Goods supplied by the Company but not manufactured by the Company shall be the warranty of the original manufacturer.

### 2. Goods manufactured by the Company:

#### TEN (10) YEARS WARRANTY\*

on the following categories of Goods supplied by the Company:

 CavitySliders™ Pocket frames manufactured by Cavity Sliders

 TrackSystems

 DoorLeaves†

\*Excludes normal wear and tear including but not limited to replaceable parts and powder coated / pre-finished surfaces.

†Ten year warranty applies to doors manufactured by Cavity Sliders. All other door leaves carry the original manufacturer's warranty.

#### FIVE (5) YEARS WARRANTY\*

on the following categories of Goods supplied by the Company:

 CL100 MorticeLock

 CL200 Range

 CL400® Magnetic

\*Excludes normal wear and tear including but not limited to replaceable parts and powder coated / pre-finished surfaces.

#### TWO (2) YEARS WARRANTY\*

on the following categories of Goods supplied by the Company:

 AutomaticUnits#

\*Excludes normal wear and tear including but not limited to replaceable parts and powder coated / pre-finished surfaces.

#Electronic components carry a 12 month warranty.

# Warranty Conditions

## Cavity Sliders USA Incorporated



### Instructions of Care

In order to maintain the warranty, the Customer is recommended to follow Instructions of Care and to inform any third party purchaser of the same information.

Instructions of Care	Common misuse is:
Only use the correct Operating Manuals	Attempting to use or repair the Goods without proper knowledge
Operate within the rated capacity	Not checking the manufacturer's recommended ratings
Do not place heavy loads on the Goods	Incorrect packing and shipment of the Goods causing damage to the exterior.
Do not expose to impact, excessive movement or continual relocation	Not realising that the Goods contain sensitive parts or may damage easily
Do not expose to excessive vibration or heat	Not realising that the parts are sensitive to excessive vibration and heat
Do not expose the Goods to water or excessive moisture	Not realising that timber may be a component and that excessive moisture damages sensitive parts and may discolor the finish

### Making a claim for damaged or defective Goods or defective Services

The Company will provide a form for any claims for damaged or defective Goods or Services but will not accept any claim by the Customer for any reasons where the Customer may be prejudiced by the defect or failure of the Goods or Services. This warranty is limited to the repair or replacement of faulty parts only. The Company will not accept any claim by the Customer for any and all costs incurred including economic loss, consequential loss or any other form of loss whatsoever. This warranty will not apply where:

- Goods or Services have not been paid in full and according to the terms of payment.
- The defect or failure is due to or resulting from damage, poor installation, misuse or use contrary to the printed instructions of the Company for maintenance or care when in the possession of the Customer.
- The defect or failure is due to persons not technically competent to use the Goods.
- The defect or failure is due to the Goods not being used for the purpose for which they were specified.
- The defect or failure is caused by the Customer or a third party on behalf of the Customer attempting integration or interfacing of the Goods with other Goods.
- The Customer or any third party altering the Goods in any way different to the condition in which they were supplied or installed.
- The defect or failure is due to environmental conditions of the Customer's site causing deterioration.
- The defect is due to the Customer or its agent attempting modification or repair of the Goods.
- The failure is caused by use in situations where the Manufacturer's specified capacity is exceeded.

### How to claim

For all inquiries, please contact the Customer Services Department of your nearest Cavity Sliders USA Inc. branch (details below) and request a claim form. The serial number (starting with SA-----) can be found on your invoice. All repairs, possible charges or replacements are at the sole discretion of Cavity Sliders USA Inc.

We welcome your feedback about product improvements or service. Please email [info@cavitysliders.com](mailto:info@cavitysliders.com)

E <a href="mailto:info@cavitysliders.com">info@cavitysliders.com</a>	548 Finney Ct Gardena, CA 90248	P (888) 466 0030 F (310) 769 5824	<a href="http://www.cavitysliders.com">www.cavitysliders.com</a>
--	------------------------------------	--------------------------------------	--