



PROFESSIONAL LINE

RESIDENTIAL PRODUCT GUIDE



- ✓ INSTALLER FRIENDLY
- ✓ EASY PROGRAMMING
- ✓ UNIVERSAL RAIL SYSTEMS



YOUR GARAGE — CONNECTED

The Genie® Aladdin Connect® system gives homeowners remote access to monitor and control their garage door from anywhere their smart device allows. Controlled through the free app available on Google Play or Apple App Store®, this technology is available as an integrated feature in certain Genie garage door openers or as an external kit. The kit allows homeowners to retrofit any Genie opener or most other brands made after 1993 with functioning safety photo eyes. Aladdin Connect comes equipped with extensive time-based rules and notification features, allowing account holders to easily customize based on their needs and manage accessibility for each add-on user.



PRODUCT FEATURES

- Control and monitor the status of your garage door from anywhere with your smart device
 - › Compatible with most iOS and Android mobile devices
 - › Allows monitoring through the Aladdin Connect app as to whether the door is opened or closed by the opener
- Remote access control system with fast and easy set-up
- Ability to know if an authorized user is operating the door with the Aladdin Connect app
 - › Maintains access history report for each opener
- UL 325 compliant - audible and visual signals before door moves when operated from smart device
- Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or external Aladdin Connect kits



VIRTUAL KEYS

- Create a virtual key to grant temporary or permanent access to relatives, friends, or service workers – up to 20 total users



TIME-BASED FEATURES

- Set the door to automatically close at a specific time each day
- Program to automatically close the garage door after a set timeframe of continuously being open

NOTE: External kit compatible with all Genie and most other residential opener brands that use photoeye sensors. Visit geniecompany.com/aladdinconnect for compatibility details.



Featuring compatibility with:



Genie adds smart platforms to its compatibility list on a regular basis.
Go to www.geniecompany.com/aladdin-connect-smart-home-partners
for most current listing.



MODELS

Wall Mount Series

MODELS 6170H-B & 6170H

Wall Mount Garage Door Openers

Product Highlights

- No rail design cleans up ceiling space
- Compact design fits into tight spaces; ideal for garages with beam obstructions
- 24V DC motor
- Opening speed: 7.5 in/sec[†]
- Limited Lifetime motor warranty*
- For residential sectional doors up to 14' high
- Flexible placement of bright LED light
- Can be used with vertical lift or up to 84" high-lift
- 6 ft power cord
- Safe-T-Pulse™ Technology
- Wireless Wall Console has closing delay of 10, 20, or 30 seconds
- Can be ordered with battery backup (6170H-B) or without (6170H); Battery can be added at a later date.



INTEGRATED
**ALADDIN
CONNECT**

 **BATTERY BACKUP
CAPABLE**



MODELS 6070H-B & 6070H

Wall Mount Garage Door Openers

Product Highlights

- No rail design cleans up ceiling space
- Compact design fits into tight spaces; ideal for garages with beam obstructions
- 24V DC motor
- Opening speed: 7.5 in/sec[†]
- Limited Lifetime motor warranty*
- For residential sectional doors up to 14' high
- Flexible placement of bright LED light
- Can be used with vertical lift or up to 84" high-lift
- 6 ft power cord
- Safe-T-Pulse™ Technology
- Wireless Wall Console has closing delay of 10, 20, or 30 seconds
- Aladdin Connect compatible
- Can be ordered with battery backup (6070H-B) or without (6070H). Battery can be added at a later date.



 **BATTERY BACKUP
CAPABLE**



FEATURING
SAFE-T-PULSE™
TECHNOLOGY

Internal Cable Tension Technology

- Innovative, internal cable tension detection eliminates safety concerns of external detection being bypassed or improperly aligned
- No external cable tension monitor means quicker installation & less service calls
- Electronic pulsing during initial travel of door travel detects slack cables & stops unsafe operation

Connected Pro Series

MODEL 4164H

Direct Screw Drive Garage Door Opener



INTEGRATED
**ALADDIN
CONNECT**

BATTERY BACKUP
CAPABLE

INDUSTRY BEST
140 VOLT
***** DC MOTOR
HEAVIER DOORS,
LIFTED FASTER

**DC
MOTOR**
WITH SOFT
START & STOP

Product Highlights

- 140V DC motor
- Opening speed: Up to 12.0 in/sec†
- Maintenance free screw drive rail
- Limited lifetime motor and screw drive rail warranty*
- For residential sectional doors up to 14' high
- Motion detector lighting
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 100 watt incandescent or CFL bulbs
- Intellicode® access security system (rolling codes)
- 6 ft. Power cord standard
- Can be ordered with battery backup (4164H-B) or without (4164H). Battery can be added at a later date.

MODEL 4124H

Belt or Chain Drive Garage Door Opener



INTEGRATED
**ALADDIN
CONNECT**

BATTERY BACKUP
CAPABLE

INDUSTRY BEST
140 VOLT
***** DC MOTOR
HEAVIER DOORS,
LIFTED FASTER

**DC
MOTOR**
WITH SOFT
START & STOP

Product Highlights

- 140V DC motor
- Opening speed: Up to 9.0 in/sec†
- Limited lifetime motor and gearbox warranty*
- For residential sectional doors up to 14' high
- Motion detector lighting
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 100 watt incandescent or CFL bulbs
- Intellicode® access security system (rolling codes)
- 6 ft. Power cord standard
- Can be ordered with battery backup (4124H-B) or without (4124H). Battery can be added at a later date.

MODEL 3124H

Belt or Chain Drive Garage Door Openers



INTEGRATED
**ALADDIN
CONNECT**

BATTERY BACKUP
CAPABLE


INDUSTRY BEST
140 VOLT
***** DC MOTOR
HEAVIER DOORS,
LIFTED FASTER

**DC
MOTOR**
WITH SOFT
START & STOP

Product Highlights

- 140V DC motor
- Opening speed: Up to 7.5 in/sec†
- Maintenance free screw drive rail
- Limited lifetime motor and screw drive rail warranty*
- For residential sectional doors up to 14' high; one-piece doors up to 8' high
- Motion detector lighting
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 100 watt incandescent or CFL bulbs
- Intellicode® access security system (rolling codes)
- 6 ft. Power cord standard
- Can be ordered with battery backup (3124H-B) or without (3124H). Battery can be added at a later date.

All integrated Aladdin Connect® models feature compatibility with:



Genie adds smart platforms to its compatibility list on a regular basis. Go to www.geniecompany.com/aladdin-connect-smart-home-partners for most current listing.

MODELS

Connected Pro Series**MODEL 3120HL**

Belt or Chain Drive Garage Door Openers


 INTEGRATED
ALADDIN
 CONNECT

 BATTERY BACKUP
CAPABLE

 INTEGRATED
LED LIGHTING

 DC
MOTOR
WITH SOFT
START & STOP
Product Highlights

- 24V DC motor
- Opening speed: Up to 7.0 in/sec[†]
- Limited lifetime motor warranty*
- For residential sectional doors up to 10' high
- DC Motor for quiet operation and lighter handling
- Integrated LED Lighting: High-efficiency, integrated LED lighting is frequency tuned not to interfere with transmitter range and designed for thousands of hours of maintenance-free use.
- C-channel rail for strength and aesthetics
- Intellicode® access security system (rolling codes)
- 6 ft. Power cord standard
- Can be ordered with battery backup (3120HL-B) or without (3120HL). Battery can be added at a later date.

MODEL 3120H

Belt or Chain Drive Garage Door Opener


 INTEGRATED
ALADDIN
 CONNECT

 BATTERY BACKUP
CAPABLE

 DC
MOTOR
WITH SOFT
START & STOP
Product Highlights

- 24V DC motor
- Opening speed: Up to 7.0 in/sec[†]
- Limited lifetime motor warranty*
- For residential sectional doors up to 10' high
- DC Motor for quiet operation and lighter handling
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 60 watt incandescent or CFL bulbs
- C-channel rail for strength and aesthetics
- Intellicode® access security system (rolling codes)
- 6 ft. Power cord standard
- Can be ordered with battery backup (3120H-B) or without (3120H-B). Battery can be added at a later date.

MODEL 2128

Belt or Chain Drive Garage Door Opener


 INTEGRATED
ALADDIN
 CONNECT

 BATTERY BACKUP
VERSION AVAILABLE
(MUST ORDER MODEL 2128B)

 DC
MOTOR
WITH SOFT
START & STOP
Product Highlights

- DC motor
- Opening speed: Up to 7.0 in/sec[†]
- 10 Year Motor Limited Warranty **
- 1 light bulb – Genie LED light bulb recommended (60 watt max if incandescent bulb is used)
- C-channel rail for strength & aesthetics[†]
- Intellicode® security to stop potential code thieves
- HomeLink® & Car2U® compatible (No external repeater box or bridge needed)
- Battery backup version available – must order 2128B. Battery cannot be added later.

MODEL 1128

Belt or Chain Drive Garage Door Opener


 INTEGRATED
ALADDIN
 CONNECT

 BATTERY BACKUP
VERSION AVAILABLE
(MUST ORDER MODEL 1128B)

 DC
MOTOR
WITH SOFT
START & STOP
Product Highlights

- DC motor
- Opening speed: Up to 6.5 in/sec[†]
- 5 Year Motor Limited Warranty **
- 1 light bulb – Genie LED light bulb recommended (60 watt max if incandescent bulb is used)
- C-channel rail for strength & aesthetics[†]
- Intellicode® security to stop potential code thieves
- HomeLink® & Car2U® compatible (No external repeater box or bridge needed)
- Battery backup version available – must order 1128B. Battery cannot be added later.

*See Programming, Operation and Maintenance manual for details.

[†] +/- 0.5 in/sec. Speed will slow for one-piece doors if opener works with that type.[°]When compared to industry standard, 12V motors.

TriloG® Pro Series //

MODEL 4064H

Direct Screw Drive Garage Door Opener



Product Highlights

- 140V DC motor
- Opening speed: Up to 12.0 in/sec†
- Maintenance free screw drive rail
- Limited lifetime motor and screw drive rail warranty*
- For residential sectional doors up to 14' high; one-piece doors up to 8' high
- Motion detector lighting
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 100 watt incandescent or CFL bulbs
- Intellicode® access security system (rolling codes)
- Aladdin Connect compatible
- Can be ordered with battery backup (4064H-B) or without (4064H). Battery can be added at a later date.

IntelliG® Pro Series //

MODEL 3024H

Belt or Chain Drive Garage Door Opener



Product Highlights

- 140V DC motor
- Opening speed: Up to 7.5 in/sec†
- Maintenance free screw drive rail
- Limited lifetime motor and screw drive rail warranty*
- For residential sectional doors up to 14' high; one-piece doors up to 8' high
- Motion detector lighting
- Bright lighting with capacity for (2) Genie LED Bulbs (recommended); 100 watt incandescent or CFL bulbs
- Intellicode® access security system (rolling codes)
- Aladdin Connect compatible
- Can be ordered with battery backup (3024H-B) or without (3024H). Battery can be added at a later date.

ReliaG® Pro Series //

MODEL 2028

Belt or Chain Drive Garage Door Opener



Product Highlights

- 24V DC motor
- Opening speed: Up to 7.0 in/sec†
- 10 year motor and integrated gearbox limited warranty*
- For residential sectional doors up to 8' high
- DC Motor for quiet operation and lighter handling
- Standard lighting with capacity for 1 Genie LED Bulb (recommended); 60 watt incandescent or CFL bulb
- C-channel rail for strength and aesthetics
- Intellicode® access security system (rolling codes)
- Aladdin Connect compatible
- Battery backup version available – must order 2028B. Battery cannot be added later.

MODEL 1028

Belt or Chain Drive Garage Door Opener



Product Highlights

- 24V DC motor
- Opening speed: Up to 6.5 in/sec†
- 5 year motor and integrated gearbox limited warranty*
- For residential sectional doors up to 8' high
- DC Motor for quiet operation and lighter handling
- Standard lighting with capacity for (1) Genie LED Bulb (recommended); 60 watt incandescent or CFL bulb
- C-channel rail for strength and aesthetics
- Intellicode® access security system (rolling codes)
- Aladdin Connect compatible
- Battery backup version available – must order 1028B. Battery cannot be added later.

ACCESSORIES

3-BUTTON REMOTE



This remote with Auto-Seek Dual Frequency (315/390 MHz) allows you to operate up to 3 openers. It comes with a visor clip and can be used with a key ring. Backward compatible with all Intellicode® equipped Genie openers.

1-BUTTON REMOTE

If the remote only needs to operate one opener, you may want our simple, easy-to-use one-button remote. Also features Auto-Seek Dual Frequency. Backward compatible with all Intellicode® equipped Genie openers.



GENIEMASTER® REMOTE



This versatile remote control works with all Genie gated community receivers as well as most Genie openers ever made, including Genie 390 MHz remotes on 9-switch, 12-switch, and 9-switch trinary formats. It also is compatible with those models that have Auto-Seek Dual Frequency.

WIRELESS KEYPAD



Wireless keypad controls up to 3 doors on a single PIN. Allows access to the garage without the need for a key. Even allows access to a friend or neighbor with a temporary code! Works with all Genie Intellicode® openers made since 1995.

Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



White



Gray



Tan



Almond

MULTI-FUNCTION WALL CONSOLE

This wired wall console features large push buttons and an operator work light control button for convenience. The Sure-Lock™ slide button can disable remotes and keypads for extra security at night or while away from home.



WIRELESS WALL CONSOLE

A completely wireless wall console that can be installed anywhere inside the garage! Features a DELAY button to give you extra time to exit the garage safely & an operator work light control button for convenience. Several options for general backlighting and a red LED to signal low battery. Works with all Genie residential openers since 2013 except 1024/2024 model variations.



Works with the industry's most popular brands of garage door openers and receivers!

UNIVERSAL REMOTE

Control up to 4 different garage door openers from a variety of manufacturers with single remote! Reduce remote clutter with one



convenient device. Versatile to include a visor clip option and key ring option inside every box. A great replacement remote! Works with the most popular industry brands of rolling code and fixed code openers made since 1993 with working safety sensors.

UNIVERSAL WIRELESS WALL CONSOLE

Control up to 3 different garage door openers from a variety of manufacturers on a single wireless wall console! Features a DELAY button to give you extra time to exit any of the 3 garage doors safely. Several options for general backlighting and a red LED to signal low battery. A great replacement console! Works with the most popular industry brands of rolling code and fixed code openers made since 1993 with working safety sensors.



UNIVERSAL KEYPAD

Control up to 3 different garage door openers from a variety of manufacturers with a single wireless keypad! LEDs light and tones sound with each proper button press. A great replacement keypad! Works with the most popular industry brands of rolling code and fixed code openers made since 1993 with working safety sensors.







ALADDIN CONNECT® KIT

Add this Wi-Fi retrofit kit to your opener for remote access and monitoring capabilities from almost anywhere with your smart device. Setup time-based rules and notifications including virtual keys for others! Access and tracking features are ideal for use with home delivery or repair personnel.

Featured compatibility with:



Genie adds smart platforms to its compatibility list on a regular basis.

Go to www.geniecompany.com/aladdin-connect-smart-home-partners for most current listing.

GENIE® GARAGE DOOR OPENER LED BULB

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Reduces or Eliminates Garage Door Opener Remote Interference



Vibration & Shatter Resistant



Cold Weather Tested & Damp Location Rated



Bright, Long Lasting & Efficient LED Technology

SAFE-T-BEAM® PHOTO EYES

Backward compatible with most Genie residential openers that use a sensor system on any door size.* Rounded design helps prevent wayward objects from accidentally knocking them out of alignment.



*Excludes 3-wire systems and the 2040 series.

HEAVY-DUTY RAIL - SCREW, BELT, OR CHAIN

Heavy-duty design prevents rail deflection ensuring smooth movement on heavier & larger residential doors.

The rail rigidity can also improve the aesthetics of door travel itself. Available in heights of 7' - 14' high. Heavy-duty rails especially match well to the lifting power of Genie 140V motor openers that tend to be used on larger doors.



BATTERY BACKUP OPTIONS



MODELS 4164, 4124, 4064, 3024

Each of the below products can be ordered with battery backup as an integrated part of the opener or without.

MODEL 3120H

Battery Backup Option



MODELS 6170H, 6070H

Battery Backup Option






SINGLE-DOOR EXTERNAL RECEIVER

Upgrade security and reliability on older openers with this single door external receiver kit. This kit allows up to 64 individual Intellicode transmitters to be added to an existing opener and provides patented frequency switching and rolling code technologies to secure the best lines of communication between Genie products. These features maximize the range of radio frequency devices, reduce the risk of radio interference, and improve the overall safety and performance of products. The kit is compatible with most major brands of garage door and gate openers and comes with (1) 3-button remote and AC power pack.



MODELS & FEATURES

						
	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
DESIGN	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
1 Drive System	Wall Mount ^g	Wall Mount ^g	Direct Drive Screw ^Δ	Belt or Chain ^{ΔΔ}	Belt or Chain ^{ΔΔ}	Belt or Chain ^{ΔΔ}
2 Motor	24V DC	24V DC	140 VOLT HEAVIER DOORS, LIFTED FASTER [•]	140 VOLT HEAVIER DOORS, LIFTED FASTER [•]	140 VOLT HEAVIER DOORS, LIFTED FASTER [•]	24V DC
3 Maximum Door Weight [†]	850 lbs.	850 lbs.	750 lbs.	750 lbs.	750 lbs.	500 lbs.
4 Drive Type	Direct Shaft Couple	Direct Shaft Couple	Direct Drive Screw	Gearbox integrated w/motor	Gearbox integrated w/motor	Gearbox integrated w/motor
5 Speed Maximum	7.5" / second***	7.5" / second***	12.0" / second***	9.0" / second***	7.5" / second***	7.0" / second***
6 Soft Start & Stop Design	Yes	Yes	Yes	Yes	Yes	Yes
7 Auto-Seek Dual Frequency (315 or 390 MHz)	Yes	Yes	Yes	Yes	Yes	Yes
8 GenieSense™ Monitoring & Diagnostic Technology	Yes	Yes	Yes	Yes	Yes	Yes
9 Power On Demand	No	No	Yes	Yes	Yes	Yes
10 Power Cord Standard Length	6'	6'	6'	6'	6'	6'
RAIL & HEIGHTS	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
1 Residential Sectional Doors - Max Height	14'	14'	14'	14'	14'	10'
2 Residential One-Piece Doors - Max Height					8'	
3 Rail Type	n/a	n/a	C-Channel	C-Channel	C-Channel	C-Channel
4 Rail Sizes Available (14'-12' are 2-piece rails; all others 1-piece)	n/a	n/a	14-12-10-8-7	14-12-10-8-7 (9'-belt only)	14-12-10-8-7 (9'-belt only)	10-8-7 (9' belt only)
5 Common Rail for Reduced Inventory	n/a	n/a	Yes-all screw drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail
6 Rail Shrink Wrap Color Code	n/a	n/a	Blue	Red-Belt / Black-Chain	Red-Belt / Black-Chain	Red-Belt / Black-Chain
LIGHTING	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
1 Light Bulb Count (sold separately)	LED light fixture	LED light fixture	2	2	2	2 
2 Light Positioned Toward Inside of Garage			Yes	Yes	Yes	Yes
3 Light Bulb Compatibility			Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	
4 Light Bulb – Max Combined Wattage for Incandescent			200 (2-100W)	200 (2-100W)	200 (2-100W)	
5 Light Stays on for 4 Minutes Once Opener Activated	Yes	Yes	Yes	Yes	Yes	Yes
6 Motion Detector Lighting			Yes	Yes	Yes	
HOMELINK® / CAR2U®	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
1 HomeLink® - Compatible with current & all previous versions*	Yes	Yes	Yes	Yes	Yes	Yes
2 Car2U® - Compatible with current & all previous versions*	Yes	Yes	Yes	Yes	Yes	Yes
WARRANTY*	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
1 Motor	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*
2 Rail	n/a	n/a	Limited Lifetime	15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)
3 Parts	5-Year Limited	5-Year Limited	5-Year Limited	5-Year Limited	5-Year Limited	3-Year Limited
4 Accessories	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited
ACCESSORIES	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
STANDARD						
1 Integrated Aladdin Connect® with Wi-Fi Connectivity [~]	Yes	No (Model 6170 only)	Yes	Yes	Yes	Yes
2 Remote (Operates Up to 3 Doors except Model 1028 & 1128)	(1) 3-Button	(1) 3-Button	(1) 3-Button	(1) 3-Button	(1) 3-Button	(1) 3-Button
Intellicode® Access Security System (Rolling Codes)	Yes	Yes	Yes	Yes	Yes	Yes
Pre-Programmed Remote Ready to Use Out of Box	Yes	Yes	Yes	Yes	Yes	Yes
Simple Steps to Change Programming as Needed	Yes	Yes	Yes	Yes	Yes	Yes
3 Wall Console	Wireless	Wireless	Series II Multi-Function	Series II Multi-Function	Series II Multi-Function	Series II Multi-Function
Sure-Lock™ Control to Disable Remotes & Keypad			Yes	Yes	Yes	Yes
Closing option of 10, 20, or 30 second delay for easier exiting	Yes	Yes				
4 Safe-T-Beam® Photo Eyes	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design
5 Battery Backup [•]	Yes (Model 6170H-B only)	Yes (Model 6070H-B only)	Yes (Model 4164H-B only)	Yes (Model 4124H-B only)	Yes (Model 3124H-B only)	Yes (Model 3120HL-B only)
AVAILABLE OPTIONS	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL
Aladdin Connect® Smart Garage Door Controller Kit [~] (Standalone kit that can be added to existing openers* – Aladdin Connect Kit model ALK11-R for all openers except Model 6070 opener which uses model GMFK-P)	n/a — integrated as standard	✓ (Model 6070 only [~])	n/a — integrated as standard	n/a — integrated as standard	n/a — integrated as standard	n/a — integrated as standard
2 Door Position Sensor (Additional sensors for external Aladdin Connect for garages with 2 or 3 doors.)	n/a	n/a	n/a	n/a	n/a	n/a
3 Genie Garage Door Opener LED Light Bulb	n/a	n/a	✓	✓	✓	✓
4 Wireless Keypad (White, Almond, Gray, Taupe Covers)	✓	✓	✓	✓	✓	✓
5 Wall Console - Wireless	Included	Included	✓	✓	✓	✓
6 Battery Backup [•]	✓	✓	✓	✓	✓	✓
7 GenieMaster™ Remote (Compatible with all Genie openers made since 1993)	✓	✓	✓	✓	✓	✓
8 1-Button Remote	✓	✓	✓	✓	✓	✓
9 Heavy-Duty Rail	n/a	n/a	✓	✓	✓	✓
	MODEL 6170H	MODEL 6070H	MODEL 4164H	MODEL 4124H	MODEL 3124H	MODEL 3120HL

≈ Aladdin Connect® Kit for Model 6070 includes internal circuit board to be inserted into powerhead

• Aladdin Connect® Compatible with Amazon Alexa, Google Assistant, Samsung SmartThings, Alarm.com, Yonomi and BenchSentry.

• See Programming, Operation & Maintenance Manual
 Δ Direct motor driven steel screw, originally patented by Genie in 1954, is self lubricating & requires no maintenance under normal operating conditions.

ΔΔ Steel-reinforced belt or full-length chain

† Door must be well counter-balanced.

* No additional external repeater kit or compatibility bridge needed.




Genie adds smart platforms to its compatibility list on a regular basis. Go to www.geniecompany.com/aladdin-connect-smart-home-partners for most current listing.

  					 	
			TriloG™ Pro Series	IntelliG® Pro Series	ReliaG® Pro Series	
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
Belt or Chain ^{AA}	Belt or Chain ^{AA}	Belt or Chain ^{AA}	Direct Drive Screw ^A	Belt or Chain ^{AA}	Belt or Chain ^{AA}	Belt or Chain ^{AA}
24V DC	24V DC	24V DC			24V DC	24V DC
500 lbs.	500 lbs.	350 lbs.	750 lbs.	750 lbs.	500 lbs.	350 lbs.
Gearbox integrated w/motor	Gearbox integrated w/motor	Gearbox integrated w/motor	Direct Drive Screw	Gearbox integrated w/motor	Gearbox integrated w/motor	Gearbox integrated w/motor
7.0" / second***	7.0" / second***	6.5" / second***	12.0" / second***	7.5" / second***	7.0" / second***	6.5" / second***
Yes	Yes	No	Yes	Yes	Yes	No
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	No	No	Yes	Yes	No	No
6'	4' (6' model available)	4' (6' model available)	6'	6'	4' (6' model available)	4' (6' model available)
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
10'	8'	8'	14'	14'	8'	8'
			8'	8'		
C-Channel	C-Channel	C-Channel	C-Channel	C-Channel	C-Channel	C-Channel
10-8-7 (9' belt only)	8-7	8-7	14-12-10-8-7	14-12-10-8-7 (9'-belt only)	8-7	8-7
Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all screw drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail	Yes-all belt (or chain) drive Pro models have one common rail
Red-Belt / Black-Chain	Red-Belt / Black-Chain	Red-Belt / Black-Chain	Blue	Red-Belt / Black-Chain	Red-Belt / Black-Chain	Red-Belt / Black-Chain
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
2	1	1	2	2	1	1
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent	Genie LED Recommended; Incandescent
120 (2-60W)	60 (1-60W)	60 (1-60W)	200 (2-100W)	200 (2-100W)	60 (1-60W)	60 (1-60W)
Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Yes			
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
Limited Lifetime*	10-Year Limited*	5-Year Limited*	Limited Lifetime	Limited Lifetime*	10-Year Limited*	5-Year Limited* / 10-Year Limited*
15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)	Limited Lifetime	15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)	15-Year Limited (belt) / 5-Year Limited (chain)
3-Year Limited	1-Year Limited	1-Year Limited	5-Year Limited	5-Year Limited	1-Year Limited	1-Year Limited
1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028
Yes	Yes	Yes	No	No	No	No
(1) 3-Button	(1) 3-Button	(1) 1-Button	(1) 3-Button	(1) 3-Button	(1) 3-Button	(1) 1-Button
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Series II Multi-Function	Series II Multi-Function	Push-Button	Series II Multi-Function	Series II Multi-Function	Series II Multi-Function	Push-Button
Yes	Yes	No	Yes	Yes	Yes	No
Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design	Rounded deflective design
Yes (Model 3120H-B only)	Yes (Model 2128B only)	Yes (Model 1128B only)	Yes (Model 4064H-B only)	Yes (Model 3024H-B only)	Yes (Model 2028B only)	Yes (Model 1028B only)
n/a — integrated as standard	n/a — integrated as standard	n/a — integrated as standard	✓	✓	✓	✓
n/a	n/a	n/a	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	MUST ORDER MODEL 2128B If battery backup is needed 	MUST ORDER MODEL 1128B If battery backup is needed 	✓	✓	MUST ORDER MODEL 2028B If battery backup is needed 	MUST ORDER MODEL 1028B If battery backup is needed 
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
MODEL 3120H	MODEL 2128	MODEL 1128	MODEL 4064H	MODEL 3024H	MODEL 2028	MODEL 1028

*** +/- 0.5" per second. Speed will slow with one-piece doors if opener works with that type.
^{AA} Includes integrated gearbox on these models
^o When compared to industry standard, 12V motors

• See website for brand compatibility
 ◇ Includes integrated Safe-T-Pulse™ System with internal slack cable detection technology

 CALIFORNIA RESIDENTS - In accordance with California State Law SB-969, all newly installed garage door openers must have battery backup as of July 1, 2019. Genie offers multiple garage door openers to meet this requirement. If needed, visit www.geniecompany.com for additional information or ask your Genie dealer for details.

INSTALLER BENEFITS



In addition to designing great end-user features into our openers, Genie engineers work hard to make sure our residential models incorporate many installer-friendly benefits that also help with the overall efficiency of your business.

Here is a comprehensive picture of how Genie can make life easier for your residential installers and more efficient for your residential operations.

Fast & Easy Installation

1. Light weight powerhead design – Genie's high performing DC motor is significantly lighter than a traditional AC motor - over 50% in some cases! Automobile-inspired high stiffness chassis provides high strength to weight ratio.
2. Quick rail assembly thanks to easy head-to-rail attachment for belt/chain models – only 4 screws! For screw drive models – only 6 screws plus a mounting flange and coupling!
3. Fully assembled, pre-tensioned rails for belt/chain models with quick access to adjust tension feature if needed.
4. Low profile C-channel rail is great for low headroom applications.
5. For attachment of the photo eye and wall console wiring to the powerhead, the unit has easy-connect wire guide leads with no fasteners required thanks to the internal spring clip that quickly grasps the wire end. The area is easily accessed from the light housing.
6. Auto-set yet adjustable force and speed settings.
7. Model 3120 requires the least amount of depth of any trolley opener allowing for tight installations.
8. Direct path for photo eye wiring from header to motor along the top of the rail saves installation time, especially with vaulted ceilings. Clips to secure wiring to rail provided for added convenience.
9. Integrated photo eye, mounting bracket, and screw terminal connection eliminates the need to splice wires.
10. Remove safety beam bracket from the photo eye plastics and reverse as needed to better fit certain installation applications.
11. Straight door arm is factory-attached to belt and chain rails.
12. Serial numbers are matched on powerhead, carton, and Operation and Programming manual for quick reference.

13. Patented Dual Frequency Technology enhances performance and reduces or eliminates potential callbacks due to near by frequency interference such as military base equipment. Since it is forward and backward compatible with all Genie openers, there is no need to have two different remotes to control two different openers of different years. That means older Genie remotes (non dipswitch) can be programmed to new openers and new remotes can be programmed to older openers.

Easy Programming

14. Remotes come pre-programmed out-of-the-box with quick steps to change if desired.
15. Easy electronic limit settings – 4 quick steps for up and down limits.
16. Limit set process is quicker than turning limit adjustment screws to get the opener moving in a given direction during initial set up mode.
17. All current models are compatible with all Intellicode® remotes, Genie safety beams, and Series II controls.
18. Compatible with current and ALL previous versions of HomeLink® and Car2U® equipped vehicles without need for an external receiver.



EASY INSTALLATIONS, EFFICIENT OPERATIONS

Best Inventory to Options Ratio in the Industry for Efficient Operations

- 19. Ability to mix and match power heads and rail systems helps grow sales and reduce inventory. Rails are available up to 14' high for 4164H, 4064, 4124H, 3024; 10' high for Model 3120 and 8' high for Models 2028 and 1028.
- 20. Interchangeable belt/chain rails and screw drive rails allow for reduced inventory, easy storage, easy retrieval, and easy identification for faster process from warehouse to installation. This includes one common interchangeable rail for all 7 belt/chain models and one common interchangeable rail for all 3 screw drive models.
- 21. Rails are shrink-wrapped in easy-to-differentiate colors of red (belt), blue (screw), and black (chain). Shrink wrap offers easy clean up with less cardboard and packing material to dispose of. It also provides weather resistant protection that will not fall apart like cardboard can due to normal storage wear and tear, or rain/snow. That means no more potential cardboard litter on the road due to inclement weather when transporting rails on your truck rack!
- 22. One set of safety beam sensors and remotes for all current production residential openers.
- 23. Safety beam sensors are backward compatible to most residential Genie openers that use a sensor system.
- 24. Non-configured universal circuit board for TriloG™ and IntelliG® Pro Series openers to reduce service truck inventory.
- 25. One-stop shopping with a full line of Residential and Commercial openers.

Technical & Consumer Support

- 26. Online videos, manuals, and shortcut cards help make it easy to get trained assistance when you need it most.
- 27. Online remote and keypad programming videos for consumers help eliminate unnecessary calls so your staff can focus on new product sales and installation!

Ease of Service

- 28. Genie has a highly trained Technical Support Service team that is second to none in the industry! As a reminder, the Professional Dealer exclusive technical support number to call if you want to take advantage of their great knowledge is:

1-800-843-4084 (Option 3 – Residential) (Option 4 – Commercial)
Hours Available: Monday – Friday, 8 a.m. – 7 p.m. ET

In addition, you can email general questions that don't require an immediate field response if you prefer not to call. Emails will be replied to within one to two business days.

genietech_support@geniecompany.com

- 29. GenieSense™ Monitoring – Automatic Force Profiling feature that potentially limits the number of call-backs by continually monitoring and adjusting the force profile requirements due to small changes that can affect the door system over time. These changes include factors such as weather, temperature, or normal door system wear. As a consumer safety feature, the opener will stop if significant changes occur.
- 30. Minimal number of repair and maintenance parts/components necessary to service entire product line.



PRODUCT MEASUREMENT DETAILS

POWERHEAD - BOXED

Shipping-Ready Packaged Dimensions & Weights*

Pro Series	Model Number	Length	Width	Height	Weight (lbs)	With BBU (total lbs)
Wall Mount	6170H	17"	15"	11½"	31½	36
Wall Mount	6070H	17"	15"	11½"	29½	34
Connected	4164H	19¼"	10¾"	10"	18	25.5
Connected	4124H	19¼"	10¾"	10"	13	20.5
Connected	3124H	19¼"	10¾"	10"	13	20.5
Connected	3120HL	18½"	16"	8¾"	15½	20
Connected	3120H	18½"	16"	8¾"	15½	20
Connected	2128/1128	13"	10"	8¼"	16	22
TriloG™	4064H	19¼"	10¾"	10"	18	25.5
IntelliG®	3024H	19¼"	10¾"	10"	13	20.5
ReliaG®	2028 / 1028	13"	10"	8¾"	12	18

PRO RAIL ASSEMBLIES

Dimensions & Weights without Packaging*

Rail Type	Length (inches)	Width (inches)	Height (inches)	Weight (lbs)	Note	Wrap Color	Headroom Clearance	One-Piece Door Compatible
7' Belt	116¾"	2⅞"	1¼"	11.5	1 pc.	Red	1½"	yes
7' Chain	116¾"	2⅞"	1¼"	14	1 pc.	Black	1½"	yes
7' Screw	112½"	2⅞"	1¼"	14	1 pc.	Blue	1½"	yes
8' Belt	128¾"	2⅞"	1¼"	12	1 pc.	Red	1½"	yes
8' Chain	128¾"	2⅞"	1¼"	15	1 pc.	Black	1½"	yes
8' Screw	124¼"	2⅞"	1¼"	15.5	1 pc.	Blue	1½"	yes
9' Belt	140¾"	2⅞"	1¼"	13	1 pc.	Red	1½"	no
10' Belt	157⅞"	2⅞"	1¼"	15	1 pc.	Red	1½"	no
10' Chain	157⅞"	2⅞"	1¼"	18	1 pc.	Black	1½"	no
10' Screw	153½"	2⅞"	1¼"	18	1 pc.	Blue	1½"	no
12' Belt	2-91(182)"	2⅞"	1¼"	18	2 pcs.	Red	1½"	no
12' Chain	2-91(182)"	2⅞"	1¼"	22	2 pcs.	Black	1½"	no
12' Screw	2-88¾(172)"	2⅞"	1¼"	23	2 pcs.	Blue	1½"	no
14' Belt	2-103(206)"	2⅞"	1¼"	20	2 pcs.	Red	1½"	no
14' Chain	2-103(206)"	2⅞"	1¼"	25	2 pcs.	Black	1½"	no
14' Screw	2-100¾(201½)"	2⅞"	1¼"	26	2 pcs.	Blue	1½"	no

NOTES:

1. All measurements are approximate and should be verified in field if critical accuracy is needed.
2. Lengths and widths rounded to nearest 1/8".
Weights rounded to nearest 1/4 pound.

3. Count per complete pallet:

Models 6170H, 6070H: 24
 Models 4164H, 3024H, 4064H: 32
 Models 3120H & 3120H-B: 30
 Models 2128, 1128, 2028, 1028: 64
 Chain/Belt Rails 7' and 8' Lengths: 64
 All Other Lengths and Rail Types: 32

POWERHEAD ONLY

Unit Dimensions & Weights without Packaging*

Pro Series	Model Number	Length	Width	Height	Weight (lbs)
Wall Mount	6170H	8¾"	6¾"	14½"	21½
Wall Mount	6070H	8¾"	6¾"	12"	17½
Connected	4164H	16⅝"	10"	7⅝"	11
Connected	4124H	16⅝"	10"	7¼"	8
Connected	3124H	16⅝"	10"	7¼"	8
Connected	3120HL	7⅝"	20⅜"	5⅝"	9
Connected	3120H	7⅝"	20⅜"	5⅝"	9
Connected	2128/1128	13"	10"	8¼"	16
TriloG™	4064H	16⅝"	10"	7⅝"	11
IntelliG®	3024H	16⅝"	10"	7¼"	8
ReliaG®	2028 / 1028	11"	9⅝"	5½"	8

OVERALL ASSEMBLED POWERHEAD & PRO RAIL ASSEMBLIES*

Rail Type	Overall Length 4164H, 4064H, 4124H, 3024H, 2568H	Overall Weight (lbs) 4164H, 4064H	Overall Weight (lbs) 4124H, 3024H	Overall Length 2028, 1028	Overall Weight (lbs) 2028, 1028	Overall Length 3120H with BBU	Overall Weight (lbs) 3120H with BBU	Overall Length 3120H without BBU	Overall Weight (lbs) 3120H without BBU
7' Belt	127"	—	19¾	121¼"	19¼	121⅞"	25¼	118¼"	21
7' Chain	127"	—	25¼	121¼"	21¾	121⅞"	27¾	118¼"	23½
7' Screw	126¾"	25¼	—	—	—	—	—	—	—
8' Belt	139"	—	20¼	133"	19¾	133⅞"	26¼	130¼"	22
8' Chain	139"	—	26¼	133"	22¾	133⅞"	29¼	130¼"	25
8' Screw	138¾"	26¾	—	—	—	—	—	—	—
9' Belt	151"	—	24¼	—	—	145⅞"	27¼	142¼"	23
10' Belt	168½"	—	26¼	—	—	163⅞"	28¾	159¾"	24½
10' Chain	168½"	—	29¼	—	—	163⅞"	31¾	159¾"	27½
10' Screw	167¾"	29¼	—	—	—	—	—	—	—
12' Belt	192½"	—	29¼	—	—	—	—	—	—
12' Chain	192½"	—	33¼	—	—	—	—	—	—
12' Screw	191¾"	34¼	—	—	—	—	—	—	—
14' Belt	216½"	—	31¼	—	—	—	—	—	—
14' Chain	216½"	—	36¼	—	—	—	—	—	—
14' Screw	215¾"	37¼	—	—	—	—	—	—	—

THE GENIE PLEDGE

The Genie Company is one of America's most recognized brands, with over 65 years of experience making garage door openers the best they can be for millions of homeowners. Our #1 goal is and always will be to provide complete customer satisfaction and peace of mind with every garage door opener made, sold, and installed.



Most recently, Genie has been recognized for openers that combine smart phone application with the opener itself, connecting you to your garage in ways you could never before imagine. We strive to be innovative while listening to our customer's needs. Genie offers the following benefits to help each of our business partners grow and prosper:

- The most innovative and reliable residential openers in the industry
- The award-winning Aladdin Connect® openers with integrated smart technology
- Great accessories that offer the most in convenience, security and good looks to homeowners
- Most innovative and reliable commercial operators for a wide range of applications
- Installer-friendly products for residential and commercial
- Solutions for a wide variety of applications
- Highly trained and readily available technical support with many years of experience
- Dedicated customer care and response team, also with many years of experience
- Marketing tools to drive business and brand growth

The Genie Company is committed to making the satisfaction of you, your employees, and your business our top priority. The goal is simple... to be your preferred business partner.

Sincerely,

The Employees of The Genie Company
The Brand You Trust



SMART. INTEGRATED. CONNECTED.
INNOVATIVE PRODUCTS TO CONNECT YOUR LIFE



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
1.800.843.4084 • www.geniecompany.com

© 2022 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator, Sure-Lock and Safe-T-Pulse are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2022 Google LLC All rights reserved. Google Assistant and Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, and all related logos are trademarks of Amazon.com Inc. or its affiliates.

Rev. 02.22 Item G001.0217



PROFESSIONAL LINE

Wall Mount Pro Series

MODEL 6170H

Wall Mount
Garage Door Opener


Battery Backup Capable



FEATURING
SAFE-T-PULSE
TECHNOLOGY

INTEGRATED
ALADDIN
CONNECT

INTELLIGENT CONTROL
FOR YOUR OPENER



Highlights

• Wall Mount Design

- » **Cleaner Look** – Eliminating the rail and opener from the ceiling brings a clean and open look to your garage. Enjoy the view or use the freed-up space for storage or other purpose.
- » **Compact** – Compact design fits into tight side room spaces between track and wall.
- » **Headroom** – Ideal for garages with beam obstructions which prevent installation of a traditional opener.
- » **Safe-T-Pulse™** – Patent-pending pulsing action provides safety check before closing and eliminates the need for an external cable tension monitoring device.
- **Quiet, Powerful Performance** – 24 Volt DC motor provides maximum power to operate doors up to 850 lbs* at a speed of 7.5" per second**.
- **Battery Backup (Model 6170H-B)** – Don't get locked outside the garage when the power goes out! Battery backup is included.
- **GenieSense™ Monitoring and Diagnostic Technology** Provides safety by continuously monitoring operation of the door, stopping the operation to alert you when significant changes occur.

- **Soft Start and Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Smart Lighting** – Bright LED light fixture with the flexibility to place wherever desired in the garage.
- **Dependability** – The quality built into a Model 6170H is backed by a Limited Lifetime Warranty[‡] for the motor.
- **Smart Garage Capabilities**
Integrated Wi-Fi provides multiple benefits such as:
 - » **Security** – Instantly know if someone is operating your garage door without permission
 - » **Convenience** – Open your door for family members, deliveries, service providers or provide them their own virtual key from anywhere with your smart device!
 - » **Safety** – Have garage door automatically close at a specific time or after an elapsed time period in case it's left open.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* Doors must be well balanced.

** Operating speed may vary based on cable drum selection and application.

‡ Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.

Model 6170H/6170H-B Wall Mount Pro Series

Standard Equipment and Warranty



Features and Benefits

POWER AND CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start and Stop control. This means the door begins and ends its travel smoothly, not abruptly, which lessens noise as well as wear and tear on the garage door.

Wall Mount Design – Eliminates the traditional rail and powerhead design by attaching directly to the garage door's spring tube. This allows for a cleaner garage ceiling, and frees up space for additional storage and headroom. Beneficial for installing in garages with beam obstructions. Powerful yet compact size allows for more placement options, especially in tight spaces next to the garage door.

Speed – Opening speed of 7.5 inches/second* gets you on your way faster.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – Puts an invisible beam across the door opening. The door stops and reverses to open position if anything passes through the beam.

Genie Exclusive Safe-T-Pulse™ System – Patent-pending system that provides internal tension monitoring of door cables with an electronic pulse during initial door travel. If it detects slack or unspooled cables, the system will stop unsafe operation. Internal slack cable detection cannot be bypassed or improperly aligned like external slack cable detection methods.

SECURITY

IntelliCode® Access Security System – Superior encryption technology (also known as rolling codes) that prevents piracy of the radio signal that opens your garage door by continually seeking a new code from billions of combinations.

Electric Lock – Automatically locks door after closing to safeguard your garage.

CONVENIENCE

Auto-Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® and Car2U® Compatibility – Works with ALL HomeLink and Car2U systems regardless of when those systems were made. No additional external repeater box or compatibility bridge needed.

Wireless Wall Console – An attractive wall console that's completely wireless for flexible placement in the garage. Features an optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie IntelliCode® openers made since 2013.

LED Light Fixture – Light fixture provides bright glowing light plus flexibility to place fixture wherever desired in the garage.

Battery Backup (Model 6170H-B) – No more unexpectedly getting locked outside the garage when the power goes out!

*Operating speed may vary based on cable drum selection and application.

† Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.




The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
1.800.35.GENIE (354-3643) • www.geniecompany.com
Item G001.6170 11/20

Aladdin Connect® INTEGRATED Wi-Fi CONNECTIVITY

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.



Compatible with:



Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.

Convenience Options

Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers and control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz).



White Gray Tan Almond

Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



1-Button Remote

Simple yet versatile one-button remote features auto-seek dual frequency. Can be used on a keychain or as a traditional visor style remote. Backward compatible with all IntelliCode® equipped Genie garage door openers.



TorqueMaster® Adapter Kit

Allows the Wall Mount opener to be installed on TorqueMaster springs without disassembly of the spring system.

Alternate Mounting Kit

Chain and sprocket coupling kit allows the Wall Mount opener to be installed above or below the door shaft in applications with obstructions.

Power Extension Kit

Allows installation and full power up to 30' from opener when there is not a power outlet within 5-1/2'.



CALIFORNIA RESIDENTS – This opener has the option to add battery backup. As required by SB-969, all newly installed openers must have battery backup as of 7/1/19. To order this opener with battery backup, refer to Model 6170H-B. If needed, visit www.geniecompany.com or ask your Genie dealer for details.

YOUR GENIE PROFESSIONAL DEALER:

© 2020 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, IntelliCode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator, Sure-Lock and Safe-T-Pulse are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2020 Google LLC All rights reserved. Google Assistant and Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, and all related logos are trademarks of Amazon.com Inc. or its affiliates.



PROFESSIONAL LINE

Wall Mount Pro Series

MODEL 6070H

**Wall Mount
Garage Door Opener**

 **Battery Backup Capable**



Highlights

• Wall Mount Design

- » **Cleaner Look** – Eliminating the rail and opener from the ceiling brings a clean and open look to your garage. Enjoy the view or use the freed-up space for storage or other purpose.
- » **Compact** – Compact design fits into tight side room spaces between track and wall.
- » **Headroom** – Ideal for garages with beam obstructions which prevent installation of a traditional opener.
- » **Safe-T-Pulse™** – Patent-pending pulsing action provides safety check before closing and eliminates the need for an external cable tension monitoring device.
- **Quiet, Powerful Performance** – 24 Volt DC motor provides maximum power to operate doors up to 850 lbs* at a speed of 7.5" per second**.

- **GenieSense™ Monitoring and Diagnostic Technology**
Provides safety by continuously monitoring operation of the door, stopping the operation to alert you when significant changes occur.
- **Smart Lighting** – Bright LED light fixture with the flexibility to place wherever desired in the garage.
- **Soft Start and Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Dependability** – The quality built into a Model 6070H is backed by a Limited Lifetime Warranty[‡] for the motor.
- **Battery Backup (Model 6070H-B)** – Don't get locked outside the garage when the power goes out! Battery backup is included.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.










* Doors must be well balanced.

** Operating speed may vary based on cable drum selection and application.

‡ Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.

Model 6070H/6070H-B Wall Mount Pro Series

Standard Equipment and Warranty

								
SAFETY BEAMS	WIRELESS WALL CONSOLE	3-BUTTON REMOTE	LED LIGHT FIXTURE	BATTERY BACKUP (6070H-B)	ELECTRIC LOCK	MOTOR [®]	PARTS [®]	ACCESSORIES [®]

Features and Benefits

POWER AND CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start and Stop control. This means the door begins and ends its travel smoothly, not abruptly, which lessens noise as well as wear and tear on the garage door.

Wall Mount Design – Eliminates the traditional rail and powerhead design by attaching directly to the garage door's spring tube. This allows for a cleaner garage ceiling, and frees up space for additional storage and headroom. Beneficial for installing in garages with beam obstructions. Powerful yet compact size allows for more placement options, especially in tight spaces next to the garage door.

Speed – Opening speed of 7.5 inches/second* gets you on your way faster.

SAFETY

Safe-T-Beam[®] Non-Contact Reversing System – Puts an invisible beam across the door opening. The door stops and reverses to open position if anything passes through the beam.

Genie Exclusive Safe-T-Pulse[™] System – Patent-pending system that provides internal tension monitoring of door cables with an electronic pulse during initial door travel. If it detects slack or unspooled cables, the system will stop unsafe operation. Internal slack cable detection cannot be bypassed or improperly aligned like external slack cable detection methods.

SECURITY

IntelliCode[®] Access Security System – Superior encryption technology (also known as rolling codes) that prevents piracy of the radio signal that opens your garage door by continually seeking a new code from billions of combinations.

Electric Lock – Automatically locks door after closing to safeguard your garage.

CONVENIENCE

Auto-Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink[®] and Car2U[®] Compatibility – Works with ALL HomeLink and Car2U systems regardless of when those systems were made. No additional external repeater box or compatibility bridge needed.

Wireless Wall Console – An attractive wall console that's completely wireless for flexible placement in the garage. Features an optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie IntelliCode[®] openers made since 2013.

LED Light Fixture – Light fixture provides bright glowing light plus flexibility to place fixture wherever desired in the garage.

Battery Backup (Model 6070H-B) – No more unexpectedly getting locked outside the garage when the power goes out!



*Operating speed may vary based on cable drum selection and application.

† Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660

1.800.35.GENIE (354-3643) • www.geniecompany.com

Item G001.6070 11/20

Convenience Options

Aladdin Connect[®]


Wi-Fi CONNECTIVITY (sold separately)

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.

Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.



Compatible with:



Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers and control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz).



Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



1-Button Remote

Simple yet versatile one-button remote features auto-seek dual frequency. Can be used on a keychain or as a traditional visor style remote. Backward compatible with all IntelliCode[®] equipped Genie garage door openers.



TorqueMaster[®] Adapter Kit

Allows the Wall Mount opener to be installed on TorqueMaster springs without disassembly of the spring system.

Alternate Mounting Kit

Chain and sprocket coupling kit allows the Wall Mount opener to be installed above or below the door shaft in applications with obstructions.

Power Extension Kit

Allows installation and full power up to 30' from opener when there is not a power outlet within 5-1/2'.



CALIFORNIA RESIDENTS – This opener has the option to add battery backup. As required by SB-969, all newly installed openers must have battery backup as of 7/1/19. To order this opener with battery backup, refer to Model 6070H-B. If needed, visit www.geniecompany.com or ask your Genie dealer for details.

YOUR GENIE PROFESSIONAL DEALER:

© 2020 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, IntelliCode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator, Sure-Lock and Safe-T-Pulse are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2020 Google LLC All rights reserved. Google Assistant and Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, and all related logos are trademarks of Amazon.com Inc. or its affiliates.



THE BRAND YOU TRUST

IntelliG Pro Series //

MODEL 4124H

Belt or Chain Drive
Garage Door Opener

 Battery Backup Capable



INDUSTRY BEST
140 VOLT
★★★★★ DC MOTOR

**HEAVIER DOORS,
LIFTED FASTER****



Highlights

- **Smart Garage Capabilities**
Integrated Wi-Fi provides multiple benefits such as:
 - » **Security** – Instantly know if someone is operating your garage door without permission
 - » **Convenience** – Open your door for family members, deliveries or service providers from anywhere with your smart device.
 - » **Tracking** – Know both the date and time of each operation of your garage door.
- **Powerful, Reliable Performance** – Genie's 140 volt DC motor is unique in the industry and operates most properly balanced residential sectional doors up to 14' high. Model 4124H has an opening speed of up to 9" per second*.
- **Battery Backup Capable** – Don't get locked outside the garage when the power goes out! The optional battery unit can easily be added to your opener.
- **GenieSense™ Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.
- **Soft Start & Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Motion Detector Lighting** – Turns lights on automatically when you enter the garage for superior convenience and security. Lights stay on for 4 minutes once you exit garage or no motion is detected.
- **Dependability** – The quality built into a Model 4124H is backed by a Limited Lifetime Warranty[†] for the motor and 15 years Limited Warranty for the belt drive rail (5 years for the chain drive rail).

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* +/- 0.5" per second for sectional doors. One-piece doors will slow speed.

** When compared to industry standard, 12V motors

† Limited non-transferable warranty. See Operation & Maintenance manual for details.

Model 4124/4124H-B IntelliG® Pro Series

Standard Equipment & Warranty

						
SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	GENIE LIMITED LIFETIME WARRANTY	GENIE LIMITED WARRANTY 15 YEARS BELT 5 YEARS CHAIN	GENIE 5 YEAR LIMITED WARRANTY PARTS	GENIE 1 YEAR LIMITED WARRANTY ACCESSORIES

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start & Stop control. This means the door begins & ends its travel smoothly, not abruptly, which lessens noise as well as wear & tear on the garage door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Belt or Chain Drive – Choose the belt drive option for quieter operation or chain drive for economical value.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Prevents thieves from using unauthorized remotes to open your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Motion Detector Lighting – Turns lights on automatically when you enter the garage for superior convenience and security. Lights stay on for 4 minutes once you exit garage or no motion is detected.

Smart Lighting – Two light bulbs positioned at the back of the powerhead provide light where you need it the most. The motion sensor makes certain you are never left in the dark and the light stays on for 4 minutes once opener is activated or sensor is tripped for ample time to get into house. Opener features bright lighting with (2) bulb capability. Genie branded LED light bulbs recommended. (If incandescent bulbs used, 60 watt max). See Genie LED bulb this page for additional details.

Auto Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® & Car2U® Compatible – Works with current & ALL previous versions of HomeLink® or Car2U®. No additional external repeater kit or compatibility bridge needed.

6' Power Cord – For high ceiling applications.


◊ Limited non-transferable warranty. See Operation & Maintenance manual for details.



Aladdin Connect® INTEGRATED WI-FI CONNECTIVITY

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.

Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.



Convenience Options

Genie® Garage Door Opener LED Bulb - NEW!

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Wireless Keypad

Mounts outside your door to give you keypad code access to your garage. Back-lit keypad lets you easily see the numbers. Controls up to 3 openers. Choose a color for the flip-up cover that best complements your home.



Battery Backup

Add this option and if the power goes out, Genie battery backup power goes on so you don't have to manually open and close the garage door!



Illuminator™ LED Remote

Perfect for homeowners on the go, this 2-button remote features a bright LED flashlight and comes with an 18" lanyard for carrying convenience. It can operate up to two Genie garage door openers with Intellicode®.



GenieMaster® Remote

This versatile remote control works with all Genie gated community receivers as well as most Genie openers ever made, including Genie 390 MHz remotes on 9-switch, 12-switch, and 9-switch trinary formats. It also is compatible with those models that have Auto Seek Dual Frequency.



YOUR GENIE PROFESSIONAL DEALER:



PROFESSIONAL LINE

Connected Pro Series

MODEL 3124H

Belt or Chain Drive
Garage Door Opener

Battery Backup Capable



INDUSTRY BEST
140 VOLT
★★★★★ DC MOTOR

**HEAVIER DOORS,
LIFTED FASTER*****

OPTIONAL ACCESSORY
GENIE LED LIGHT BULB

Highlights

- **Smart Garage Capabilities**
Integrated Wi-Fi provides multiple benefits such as:
 - » **Security** – Instantly know if someone is operating your garage door without permission.
 - » **Convenience** – Open your door for family members, deliveries or service providers from anywhere with your smart device.
 - » **Safety** – Have garage door automatically close at a specific time or after an elapsed time period in case it's left open.
- **Quiet, strong performance** – 140 volt DC motor provides quiet yet strong performance with an opening speed of 7.5" per second*. Opener works on residential sectional garage doors up to 14' high, and one-piece doors up to 8' high.
- **Battery Backup Capable (Model 3124H-B)** – Don't get locked outside the garage when the power goes out! The optional battery unit can easily be added to your opener.
- **GenieSense™ Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.
- **Soft Start and Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Power on Demand** – Refers to the ability of the opener to continually monitor the door's travel and deliver just the right amount of power for smooth and consistent movement.
- **Dependability** – A Limited Lifetime Warranty[†] on the motor and integrated gearbox shows how confident Genie is that your opener will perform when you need it to for years to come.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

** +/- 0.5" per second for sectional doors.

*** When compared to industry standard, 12V motors

† Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.

Model 3124H/3124H-B Connected Pro Series

Standard Equipment and Warranty

						
SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	GENIE LIMITED LIFETIME WARRANTY MOTOR AND GEARBOX*	GENIE LIMITED WARRANTY 15 YEARS BELT & CHAIN*	GENIE 5 YEAR LIMITED WARRANTY PARTS*	GENIE 1 YEAR LIMITED WARRANTY ACCESSORIES*

Features and Benefits



POWER AND CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start and Stop control. This means the door begins and ends its travel smoothly, not abruptly, which lessens noise as well as wear and tear on the garage door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Speed – Opening speed of 7.5 inches/second* gets you on your way faster.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses to open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Prevents thieves from using unauthorized remotes to open your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Smart Lighting – Light bulbs are positioned toward inside of garage instead of toward door for light where it's needed most. Lights stay on for 4 minutes once opener is activated for ample time to get into house. Opener features bright lighting with (2) bulb capability. Genie branded LED light bulbs recommended. (If incandescent bulbs used, 100 watt max per bulb). See Genie LED bulb this page for additional details.

Auto-Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® and Car2U® Compatible – Works with current and ALL previous versions of HomeLink® or Car2U®. No additional external repeater kit or compatibility bridge needed.

6' Power Cord – For high ceiling applications.



CALIFORNIA RESIDENTS – This opener has the option to add battery backup. As required by SB-969, all newly installed openers must have battery backup as of 7/1/19. To order this opener with battery backup, refer to Model 3124H-B. If needed, visit www.geniecompany.com or ask your Genie dealer for details.

◊ Limited non-transferable warranty. See Programming, Operation and Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660

1.800.35.GENIE (354-3643) • www.geniecompany.com

Item G001.3124 11/20


Aladdin Connect®
INTEGRATED WI-FI CONNECTIVITY

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.

Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.



Compatible with:



Convenience Options

Genie® Garage Door Opener LED Bulb

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers and control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz).



Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



Battery Backup (Model 3124H-B) Add this option and if the power goes out, Genie battery backup power goes on so you don't have to manually open and close the garage door!



1-Button Remote

Simple yet versatile one-button remote features auto-seek dual frequency. Can be used on a keychain or as a traditional visor style remote. Backward compatible with all Intellicode® equipped Genie garage door openers.



Wireless Wall Console

An attractive wall console that's completely wireless for flexible placement in the garage. Features an optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie Intellicode® openers made since 2013.



Heavy-Duty Rail

Heavy-duty design prevents rail deflection ensuring smooth movement on taller garage doors. The rail rigidity can also improve the aesthetics of door travel itself.



YOUR GENIE PROFESSIONAL DEALER:

© 2020 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2020 Google LLC All rights reserved. Google Assistant and Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, and all related logos are trademarks of Amazon.com Inc. or its affiliates.



PROFESSIONAL LINE

Connected Pro Series

MODEL 3120

Belt or Chain Drive
Garage Door Opener

Battery Backup Capable



SMART HOME
INNOVATIONS



Highlights

- **Smart Garage Capabilities**
Integrated Wi-Fi provides multiple benefits such as:
 - » **Security** – Instantly know if someone is operating your garage door without permission
 - » **Convenience** – Open your door for family members, deliveries or service providers from anywhere with your smart device.
 - » **Tracking** – Know both the date and time of each operation of your garage door.
- **Durable, reliable performance** – The strong DC motor operates most properly balanced residential sectional doors up to 10' high. Model 3120 has an opening speed of 7.0" per second*.
- **Battery Backup Capable** – Don't get locked outside the garage when the power goes out! The optional battery unit can easily be added to your opener.
- **GenieSense™ Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.
- **Soft Start & Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Smart Lighting** – The Model 3120 comes with lighting on each side of the powerhead to help spread light around the entire garage.
- **Dependability** – The quality built into a Model 3120 is backed by a 15-Year motor and 15-Year belt drive rail Limited Warranties[†] (5-Year chain drive rail).

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* +/- 0.5" per second for sectional doors.

** When compared to industry standard, 12V motors

† Limited non-transferable warranty. See Programming, Operation & Maintenance manual for details.

Model 3120/3120-B Connected Pro Series



Standard Equipment & Warranty

SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	MOTOR [®]	RAIL [®] (BELT DRIVE)	RAIL [®] (CHAIN DRIVE)	PARTS [®]	ACCESSORIES [®]

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start & Stop control. This means the door begins & ends its travel smoothly, not abruptly, which lessens noise as well as wear & tear on the garage door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Belt or Chain Drive – Choose the belt drive option for quieter operation or chain drive for economical value.

SAFETY

Safe-T-Beam[®] Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode[®] Access Security System – Prevents thieves from using unauthorized remotes to open your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock[™] Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Smart Lighting – One light bulb is positioned to each side of the powerhead to help light the entire garage. Light stays on for 4 minutes once opener is activated for ample time to get into house. Opener features bright lighting with (2) bulb capability. Genie branded LED light bulbs recommended. (If incandescent bulbs used, 60 watt max). See Genie LED bulb this page for additional details.

Auto Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink[®] & Car2U[®] Compatible – Works with current & ALL previous versions of HomeLink[®] or Car2U[®]. No additional external repeater kit or compatibility bridge needed.

6' Power Cord – For high ceiling applications.

CALIFORNIA RESIDENTS – This opener has the option to add battery backup. As required by SB-969, all newly installed openers must have battery backup as of 7/1/19. To order this opener with battery backup, refer to Model 3120H-B. If needed, visit www.geniecompany.com or ask your Genie dealer for details.

◊ Limited non-transferable warranty. See Programming, Operation & Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
1.800.35.GENIE (354-3643) • www.geniecompany.com
Item G001.0315 (Rev.07/19) 1,750 09/19 JAR

Optional
Battery
Backup

Aladdin Connect[®] INTEGRATED WI-FI CONNECTIVITY

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.

Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.



Compatible with:



Convenience Options

Genie[®] Garage Door Opener LED Bulb

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers & control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz).

Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



Battery Backup

Add this option and if the power goes out, Genie battery backup power goes on so you don't have to manually open and close the garage door!



Illuminator[™] LED Remote

Perfect for homeowners on the go, this 2-button remote features a bright LED flashlight and comes with an 18" lanyard for carrying convenience. It can operate up to two Genie garage door openers with Intellicode[®].



Wireless Wall Console

An attractive wall console that's completely wireless for flexible placement in the garage. Enjoy the optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie Intellicode[®] openers made since 2013.



YOUR GENIE PROFESSIONAL DEALER:

© 2019 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2019 Google LLC All rights reserved. Google Assistant & Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, & all related logos are trademarks of Amazon.com Inc. or its affiliates.



PROFESSIONAL LINE

IntelliG Pro Series

MODEL 3024

Belt or Chain Drive
Garage Door Opener

 Battery Backup Capable



INDUSTRY BEST
140 VOLT
★★★★★ DC MOTOR

**HEAVIER DOORS,
LIFTED FASTER**



Highlights

- **Quiet, strong performance** – 140 volt DC motor provides quiet yet strong performance with an opening speed of 7.5" per second*. Opener works on residential sectional garage doors up to 14' high, and one-piece doors up to 8' high.
- **Soft Start & Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Smart Illumination Lighting** – The 2-bulb system positions the light toward the inside of the garage instead of on the door for light where you need it most.
- **Dependable** – A Limited Lifetime Warranty[‡] on the motor and integrated gearbox shows how confident Genie is that your opener will perform when you need it to for years to come.
- **Power on Demand** – Refers to the ability of the opener to continually monitor the door's travel and deliver just the right amount of power for smooth and consistent movement.
- **GenieSense™ Monitoring** – Automatic force profiling & diagnostic technology improves safety by stopping operation when significant changes occur.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* +/- 0.5 inches per second. Speed will slow with one-piece doors.

‡ Limited non-transferable warranty. See Programming, Operation & Maintenance Manual for details.

Model 3024/3024H IntelliG® Pro Series

Standard Equipment & Warranty

						
SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	GENIE LIMITED LIFETIME WARRANTY MOTOR AND GEARBOX*	GENIE LIMITED WARRANTIES 15 YEARS BELT 5 YEARS CHAIN*	GENIE 5 YEAR LIMITED WARRANTY PARTS*	GENIE 1 YEAR LIMITED WARRANTY ACCESSORIES*

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The 140 volt DC motor offers quiet yet strong performance. The DC motor gives the ability to integrate Soft Start & Stop control, meaning the door begins and ends its travel smoothly instead of abruptly. This also helps create less noise and less wear and tear on your door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Speed – The powerhead has an opening speed of 7.5 inches/second* to get you on your way faster.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Genie's superior encryption technology prevents piracy of the radio signal that operates your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Smart Illumination – Light bulbs are positioned toward inside of garage instead of toward door for light where it's needed most. Lights stay on for 4 minutes once opener is activated for ample time to get into house. Opener features bright lighting with (2) bulb capability. Genie branded LED light bulbs recommended. (If incandescent bulbs used, 100 watt max per bulb). See Genie LED bulb this page for additional details.

Auto Seek Dual Frequency – The internal system automatically uses either the 315 or 390 MHz frequency produced by the remote control or keypad to help ensure the opener responds regardless of potential nearby frequency interference, such as military base equipment.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® & Car2U® Compatible – Works with current and ALL previous versions of HomeLink® or Car2U®. No additional external repeater kit or compatibility bridge needed.

6' Power Cord (Model 3024H) – For high ceiling applications.



CALIFORNIA RESIDENTS – This opener has the option to add battery backup. As required by SB-969, all newly installed openers must have battery backup as of 7/1/19. To order this opener with battery backup, refer to Model 3024H-B. If needed, visit www.geniecompany.com or ask your Genie dealer for details.

* +/- 0.5 inches per second. Speed will slow with one-piece doors.
 † Limited non-transferable warranty. See Operation & Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
 1.800.35.GENIE (354-3643) • www.geniecompany.com
 Item G001.0163 (Rev. 07/19) 1,875 07/19 JAR



Convenience Options


Genie® Garage Door Opener LED Bulb

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Aladdin Connect®

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.



Compatible with:



Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.

Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers & control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz). Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



Battery Backup

Add this option and if the power goes out, Genie battery backup power goes on so you don't have to manually open and close the garage door!



Illuminator™ LED Remote

Perfect for homeowners on the go, this 2-button remote features a bright LED flashlight and comes with an 18" lanyard for carrying convenience. It can operate up to two Genie garage door openers with Intellicode®.



Wireless Wall Console

An attractive wall console that's completely wireless for flexible placement in the garage. Enjoy the optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie Intellicode® openers made since 2013.



YOUR GENIE PROFESSIONAL DEALER:

© 2019 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2019 Google LLC All rights reserved. Google Assistant & Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, & all related logos are trademarks of Amazon.com Inc. or its affiliates.



PROFESSIONAL LINE

Connected Pro Series

MODEL 2128

Belt or Chain Drive
Garage Door Opener



INTELLIGENT CONTROL
FOR YOUR OPENER



Highlights

- **Integrated Aladdin Connect®** – With Wi-Fi smart-home integration you can control and monitor the Model 2128 from nearly anywhere with a smart device.
- **Durable, reliable performance** – The strong DC motor operates most properly balanced residential sectional doors up to 8' high. Model 2128 has an opening speed of 7" per second*.
- **Dependability** – The quality built into a Model 2128 is backed by a 10-Year Limited Warranty for the motor and 15-Year for the belt drive rail (5-Year for chain drive rail).[†]
- **Soft Start & Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* +/- 0.5" per second for sectional doors.

[†] Limited non-transferable warranty. See Programming, Operation & Maintenance Manual for details.

Model 2128 Connected Pro Series



Standard Equipment & Warranty

SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	MOTOR [†]	RAIL [†] (BELT DRIVE)	RAIL [†] (CHAIN DRIVE)	PARTS & ACCESSORIES [†]

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The DC motor provides quiet operation as well as Soft Start & Stop control. This means the door begins & ends its travel smoothly, not abruptly, which lessens noise as well as wear & tear on the garage door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Belt or Chain Drive – Choose the belt drive option for quieter operation or chain drive for economical value.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Prevents thieves from using unauthorized remotes to open your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Auto Seek Dual Frequency – The opener automatically uses either 315 or 390 MHz frequency to avoid potential nearby interference, such as military base equipment, to help ensure the opener operates properly.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® & Car2U® Compatible – Works with current & ALL previous versions of HomeLink® or Car2U®. No additional external repeater kit or compatibility bridge needed.



CALIFORNIA RESIDENTS – This opener is not for sale in California. It does not have a battery backup function as required by California SB-969. Visit www.geniecompany.com for our full lineup of compliant models or ask your Genie dealer for details.

[†] Limited non-transferable warranty. See Programming, Operation & Maintenance Manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
1.800.35.GENIE (354-3643) • www.geniecompany.com
Item G001.2128 (Rev. 07/19) 2,000 09/19 JAR



Aladdin Connect® INTEGRATED WI-FI CONNECTIVITY

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.



Compatible with:



Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.

Convenience Options

Genie® Garage Door Opener LED Bulb

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Wireless Keypad

Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers & control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz). Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



Illuminator™ LED Remote

Perfect for homeowners on the go, this 2-button remote features a bright LED flashlight and comes with an 18" lanyard for carrying convenience. It can operate up to two Genie garage door openers with Intellicode®.



Wireless Wall Console

An attractive wall console that's completely wireless for flexible placement in the garage. Enjoy the optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie Intellicode® openers made since 2013.



YOUR GENIE PROFESSIONAL DEALER:

© 2019 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2019 Google LLC All rights reserved. Google Assistant & Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, & all related logos are trademarks of Amazon.com Inc. or its affiliates.



PROFESSIONAL LINE

ReliaG® Pro Series

MODEL 2028

Belt or Chain Drive
Garage Door Opener



Highlights

- **Durable Performance** – The DC motor provides quiet yet strong performance with an opening speed of 7.0" per second* for residential sectional garage doors up to 8' high.
- **Soft Start & Stop Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Dependability** – The quality built into a Model 2028 is backed by a 10-Year Limited Warranty for the motor and 15-Year for the belt drive rail (5-Year for chain drive rail).[‡]
- **Smart Illumination Lighting** – The light bulb is positioned toward the inside of the garage instead of on the door for light where you need it most.
- **GenieSense™ Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.

THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — The Brand You Trust.

* +/- 0.5 inches per second.

‡ Limited non-transferable warranty. See Programming, Operation & Maintenance Manual for details.

Model 2028/2028H ReliaG® Pro Series



Standard Equipment & Warranty

SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	GENIE 10 YEAR LIMITED WARRANTY MOTOR AND GEARBOX*	GENIE 15 YEAR LIMITED WARRANTY RAIL* (BELT DRIVE)	GENIE 5 YEAR LIMITED WARRANTY RAIL* (CHAIN DRIVE)	GENIE 1 YEAR LIMITED WARRANTY PARTS & ACCESSORIES*

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The DC motor offers quiet performance. The DC motor also gives the ability to integrate Soft Start & Stop control, meaning the door begins and ends its travel smoothly instead of abruptly. This also helps create less noise and less wear and tear on your door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Belt or Chain Drive – Choose the belt drive option for quieter operation or chain drive for economical value.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Genie's superior encryption technology prevents piracy of the radio signal that operates your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Smart Illumination – Light bulb is positioned toward inside of garage instead of toward door for light where it's needed most. Light stays on for 4 minutes once opener is activated for ample time to get into house. Opener features standard lighting with (1) bulb capability. Genie branded LED light bulb recommended. (If incandescent bulb used, 60 watt max). See Genie LED bulb this page for additional details.

Auto Seek Dual Frequency – The internal system automatically uses either the 315 or 390 MHz frequency produced by the remote control or keypad to help ensure the opener responds regardless of potential nearby frequency interference, such as military base equipment.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® & Car2U® Compatible – Works with current and ALL previous versions of HomeLink® or Car2U®. No additional external repeater kit or compatibility bridge needed.

6' Power Cord (Model 2028H) – For high ceiling applications.



CALIFORNIA RESIDENTS – This opener is not for sale in California. It does not have a battery backup function as required by California SB-969. Visit www.geniecompany.com for our full lineup of compliant models or ask your Genie dealer for details.

* Limited non-transferable warranty. See Programming, Operation & Maintenance Manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
1.800.35.GENIE (354-3643) • www.geniecompany.com
Item G001.0184 (Rev. 07/19) 2M 08/19 JAR



Convenience Options

Genie® Garage Door Opener LED Bulb

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs, which are being phased out due to energy inefficiency, can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Aladdin Connect®

Remotely monitor and control your garage door from almost anywhere with your smart device. Time-based features allow you to set door to automatically close and/or notify after a set length of time; as well as schedule a specific hour and minute to close the door and/or notify when it does. Also allows for multiple individual user accounts so you can provide virtual key access for your garage door to a friend, relative, or service person for a certain time, a range of time, or permanently.



Compatible with:



Use the Aladdin Connect app to control any combination of 20 different Genie Wi-Fi integrated garage door openers or standalone Aladdin Connect Door Control Modules.

Wireless Keypad


Easy-to-program keypad mounts outside your door to give you convenient code access to your garage, which is great when you are outside without the remote control. Back-lit keypad lets you easily see the numbers & control up to 3 openers. Uses Auto-Seek Dual Frequency (315/390 MHz).

Choose a color for the flip-up cover that best complements your home. White is standard, other colors sold separately.



Illuminator™ LED Remote

Perfect for homeowners on the go, this 2-button remote features a bright LED flashlight and comes with an 18" lanyard for carrying convenience. It can operate up to two Genie garage door openers with Intellicode®.

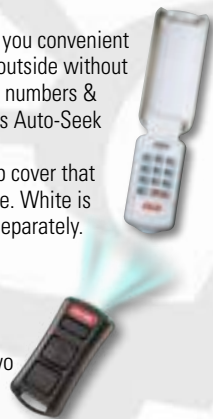

Wireless Wall Console

An attractive wall console that's completely wireless for flexible placement in the garage. Enjoy the optional pulsing back-light as well as delay button that gives ample time (up to 30 seconds) to exit the garage before the door begins moving. The work light button can turn just the opener's light on at any time. Compatible with most Genie Intellicode® openers made since 2013.



YOUR GENIE PROFESSIONAL DEALER:

© 2019 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Aladdin Connect, GenieMaster and the Genie logo are registered trademarks and Illuminator and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation. | © 2019 Google LLC All rights reserved. Google Assistant & Google Play are trademarks of Google LLC. | Amazon, Echo, Alexa, & all related logos are trademarks of Amazon.com Inc. or its affiliates.